


Examples of SIP Message Sequences

- Via:
- From: and To:
- Call-ID:
 - host-specific
- Contact: (for future SIP message transmission)
 - *
- Content-Length:
 - Zero, no msg body
- CSeq:
 - A response to any request must use the same value of CSeq as used in the request.
- Expires:
 - TTL
 - 0, unreg

Collins@station1.work.com



Registrar

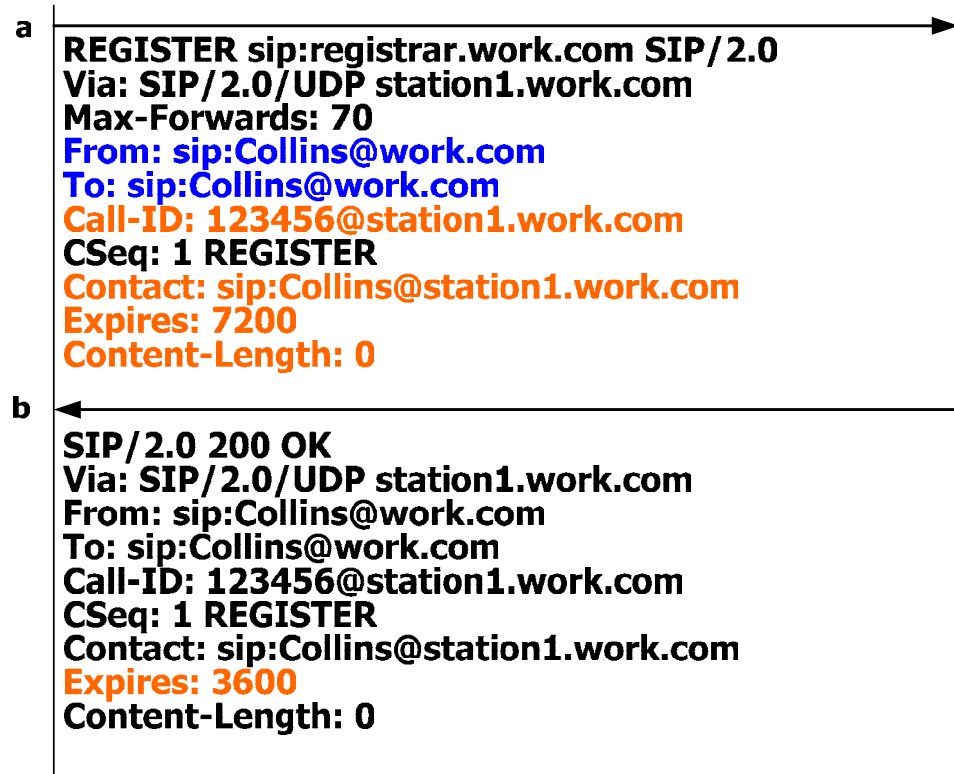


Invitation

- A two-party call
 - Subject:
 - optional
 - Content-Type:
 - application/sdp
 - A dialog ID
 - To identify a peer-to-peer relationship between two user agents
 - Tag in From
 - Tag in To
 - Call-ID

Daniel<sip:Collins@work.com>

Boss<sip:Manager@station2.work.com>

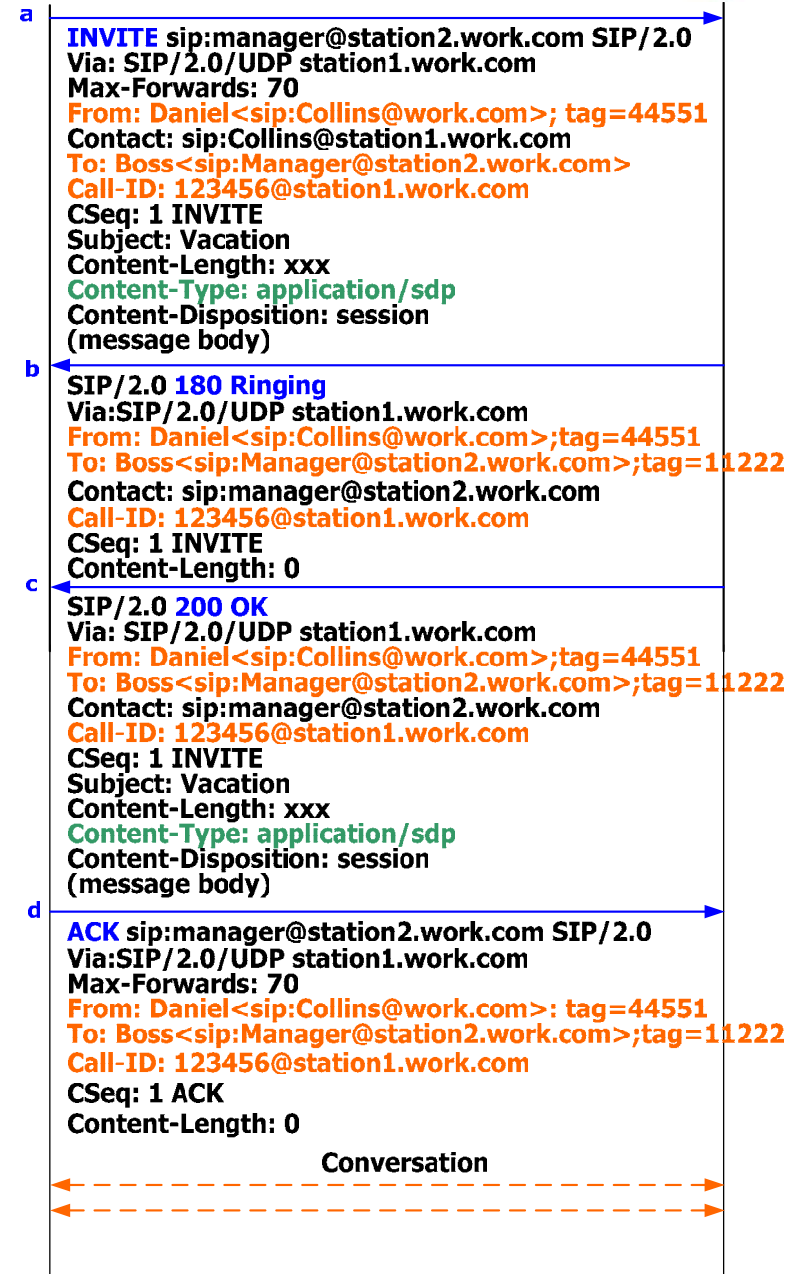

Termination of a Call

- CSeq has changed.

Daniel<sip:Collins@work.com>

Boss<sip:Manager@station2.work.com>



a

```
BYE sip:manager@work.com SIP/2.0
Via: SIP/2.0/UDP station1.work.com; branch=z9hG4bK123
Max-Forwards: 70
From: Daniel<sip:Collins@work.com>; tag=44551
To: Boss<sip:Manager@station2.work.com>; tag=11222
Call-ID: 123456@station1.work.com
CSeq: 2 BYE
Content-Length: 0
```

b

```
SIP/2.0 200 OK
Via: SIP/2.0/UDP station1.work.com;
branch=z9hG4bK123
From: Daniel<sip:Collins@work.com>; tag=44551
To: Boss<sip:Manager@station2.work.com>; tag=11222
Call-ID: 123456@station1.work.com
CSeq: 2 BYE
Content-Length: 0
```

Redirect Servers

- An alternative address
 - 302, Moved temporarily
- Another INVITE
 - Same Call-ID
 - CSeq ++

Daniel<sip:Collins@work.com>

Redirect Server Boss<sip:Manager@pc1.home.net>



a

```
INVITE sip:manager@work.com SIP/2.0
Via: SIP/2.0/UDP station1.work.com
Max-Forwards: 70
From: Daniel<sip:Collins@work.com>; tag=44551
Contact: sip:Collins@station1.work.com
To: Boss<sip:Manager@work.com>
Call-ID: 123456@station1.work.com
CSeq: 1 INVITE
Subject: Vacation
Content-Length: xxx
Content-Type: application/sdp
Content-Disposition: session
(message body)
```

b

```
SIP/2.0 302 Moved Temporarily
Via: SIP/2.0/UDP station1.work.com
From: Daniel<sip:Collins@work.com>; tag=44551
To: Boss<sip:Manager@work.com>; tag=11222
Call-ID: 123456@station1.work.com
CSeq: 1 INVITE
Contact: sip:Manager@pc1.home.net
```

c

```
ACK sip:manager@work.com SIP/2.0
Via: SIP/2.0/UDP station1.work.com
Max-Forwards: 70
From: Daniel<sip:Collins@work.com>; tag=44551
To: Boss<sip:Manager@work.com>
Call-ID: 123456@station1.work.com
CSeq: 1 ACK
```

d

```
INVITE sip:manager@pc1.home.net SIP/2.0
Via: SIP/2.0/UDP station1.work.com
Max-Forwards: 70
From: Daniel<sip:Collins@work.com>; tag=44551
Contact: sip:Collins@station1.work.com
To: Boss<sip:Manager@work.com>
Call-ID: 123456@station1.work.com
CSeq: 2 INVITE
Subject: Vacation
Content-Length: xxx
Content-Type: application/sdp
Content-Disposition: session
(message body)
```



Proxy Servers [1/2]

- Sits between a user-agent client and the far-end user-agent server
- Numerous proxies can reside in a chain between the caller and callee.
 - The most common scenario will have at least two proxies: one at the caller and one at the callee end.
 - It is likely that only the last proxy in the chain changes the Request-URI.
 - The other proxies in the chain would simply use the domain part of the received Request-URI as input to a location function (e.g., DNS) to determine the next hop.



Proxy Servers [2/2]

- Via:
 - The path taken by a request
 - Loop detected, 482 (status code)
 - For a response
 - The first Via: header is checked and removed.
 - The second Via: header is checked.
 - If it exists, perform forwarding.
 - If not, the response is destined to the proxy itself.
 - The response finds its way back to the originator of the request.
 - Branch: used to distinguish between multiple responses to the same request
 - Forking Proxy: Issue a single request to multiple destinations



Proxy State [1/2]

- Can be either stateless or stateful
- If stateless, the proxy takes an incoming request, performs whatever translation and forwards the corresponding outgoing request and forgets anything.
 - Retransmission takes the same path (no change on retransmission).
- If stateful, the proxy remembers incoming requests and corresponding outgoing request.
 - The proxy is able to act more intelligently on subsequent requests and responses related to the same session.




Proxy State [2/2]

- Record-Route: and Route: Headers
 - The subsequent requests may not pass through the same path as the initial request/response.
 - E.g., use Contact:
 - A Proxy might require that it remains in the signaling path for all subsequent requests to provide some advanced service.
 - In particular for a stateful proxy
 - Insert its address into the Record-Route: header
 - The response includes the Record-Route: header
 - The information contained in the Record-Route: header is used in the subsequent requests related to the same call.
 - The Route: header is used to record the path that the request is enforced to pass.

Boss<sip:Manager@pc1.home.net>

sip:Server.work.com

Daniel<sip:Collins@station1.work.com>

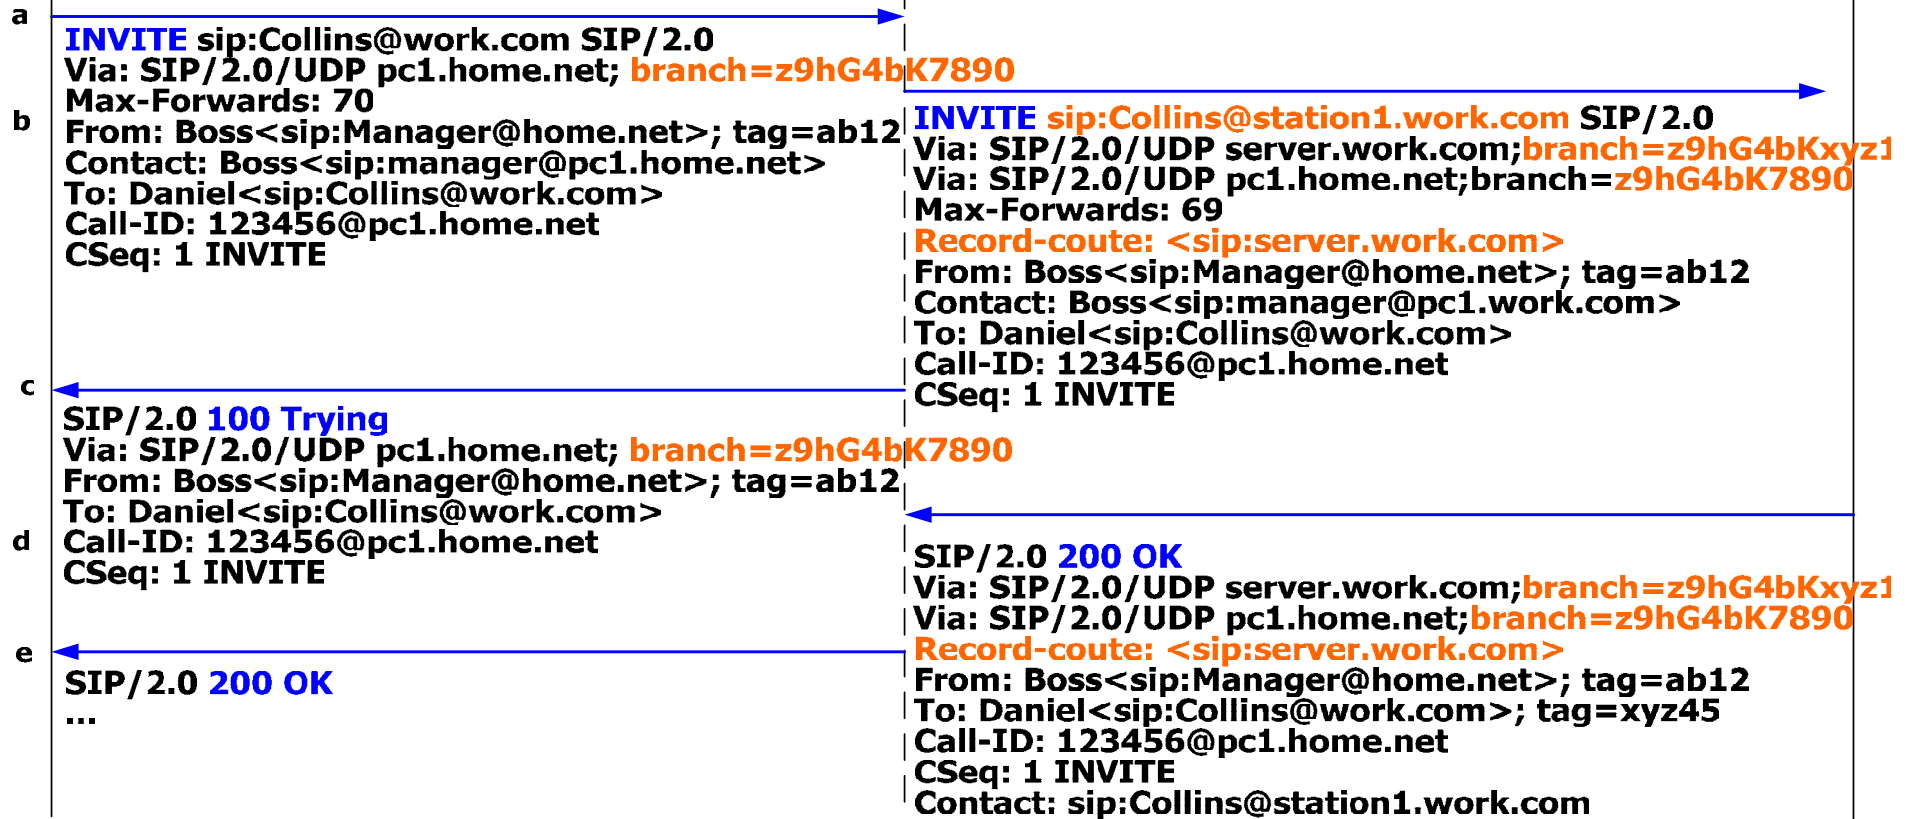

Boss<sip:Manager@pc1.home.net>



sip:Server.work.com



Daniel<sip:Collins@station1.work.com>



e ←

SIP/2.0 200 OK
 Via: SIP/2.0/UDP pc1.home.net; **branch=z9hG4bK7890**
Record-route: <sip:server.work.com>
 From: Boss<sip:Manager@home.net>; tag=ab12
 To: Daniel<sip:Collins@work.com>; tag=xyz45
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE
 Contact: sip:Collins@station1.work.com

f →

ACK sip:Collins@station1.work.com SIP/2.0
 Via: SIP/2.0/UDP pc1.home.net; **branch=z9hG4bK7891**
 Max-Forwards: 70
Route: <sip:server.work.com>
 From: Boss<sip:Manager@home.net>; tag=ab12
 To: Daniel<sip:Collins@work.com>; tag=xyz45
 Call-ID: 123456@pc1.home.net
 CSeq: 1 ACK

g →

ACK sip:Collins@station1.work.com SIP/2.0
 Via: SIP/2.0/UDP server.work.com; **branch=z9hG4bKxyz2**
 Via: SIP/2.0/UDP pc1.home.net; **branch=z9hG4bK7891**
 Max-Forwards: 69
 From: Boss<sip:Manager@home.net>; tag=ab12
 To: Daniel<sip:Collins@work.com>; tag=xyz45
 Call-ID: 123456@pc1.home.net
 CSeq: 1 ACK



Forking Proxy

- A proxy can “fork” requests
- A user is registered at several locations
 - ;branch=xxx
- In order to handle such forking, a proxy must be stateful.

Boss<sip:Manager@pc1.home.net>



sip:Server.work.com



pc1

pc2



a **INVITE** sip:Collins@work.com SIP/2.0
 Via: SIP/2.0/UDP pc1.home.net; branch=z9hG4bK789
 Max-Forwards: 70
 From: Boss<sip:Manager@home.net>; tag=ab12
 Contact: Boss<sip:manager@pc1.home.net>
 To: Daniel<sip:Collins@work.com>
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE

b **SIP/2.0 100 Trying**
 Via: SIP/2.0/UDP pc1.home.net; branch=z9hG4bK789

c **INVITE** sip:Collins@pc1.work.com SIP/2.0
 Via: SIP/2.0/UDP server.work.com; branch=z9hG4bK123
 Via: SIP/2.0/UDP pc1.home.net; branch=z9hG4bK789
 Max-Forwards: 69
 Record-coute: <sip:server.work.com;lr>
 From: Boss<sip:Manager@home.net>; tag=ab12
 Contact: Boss<sip:manager@pc1.work.com>
 To: Daniel<sip:Collins@work.com>
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE

d **INVITE** sip:Collins@pc2.work.com SIP/2.0
 Via: SIP/2.0/UDP server.work.com; branch=z9hG4bK456
 Via: SIP/2.0/UDP pc1.home.net; branch=z9hG4bK789
 Max-Forwards: 69
 Record-coute: <sip:server.work.com;lr>
 From: Boss<sip:Manager@home.net>; tag=ab12
 Contact: Boss<sip:manager@pc1.work.com>
 To: Daniel<sip:Collins@work.com>
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE

Boss<sip:Manager@pc1.home.net>



sip:Server.work.com



pc1

pc2



e

SIP/2.0 200 OK
 Via: SIP/2.0/UDP server.work.com;branch=z9hG4bK456
 Via: SIP/2.0/UDP pc1.home.net;branch=z9hG4bK789
 Record-Route: <sip:server.work.com;lr>
 From: Boss<sip:Manager@home.net>; tag=ab12
 To: Daniel<sip:Collins@work.com>; tag=xyz45
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE
 Contact: sip:Collins@pc2.work.com

f

g

SIP/2.0 200 OK
 Via: SIP/2.0/UDP pc1.home.net;branch=z9hG4bK789
 Record-coute: <sip:server.work.com;lr>
 From: Boss<sip:Manager@home.net>; tag=ab12
 To: Daniel<sip:Collins@work.com>; tag=xyz45
 Call-ID: 123456@pc1.home.net
 CSeq: 1 INVITE
 Contact: sip:Collins@pc2.work.com

CANCEL sip:Collins@pc1.work.com SIP/2.0
 Via: SIP/2.0/UDP server.work.com;branch=z9hG4bK456
 Max-Forwards: 69
 Record-coute: <sip:server.work.com;lr>
 From: Boss<sip:Manager@home.net>; tag=ab12
 Contact: Boss<sip:manager@pc1.work.com>
 To: Daniel<sip:Collins@work.com>
 Call-ID: 123456@pc1.home.net
 CSeq: 1 CANCEL




The Session Description Protocol

- The Most Common Message Body
 - Session information describing the media to be exchanged between the parties
 - SDP, RFC 2327 (initial publication)
 - A number of modifications to the protocol have been suggested.
- SIP uses SDP in an answer/offer mode.
 - An agreement between the two parties as to the types of media they are willing to share
 - RFC 3264 (An Offer/Answer Model with SDP)
 - To describe how SDP and SIP should be used together

The Structure of SDP

- SDP simply provides a format for describing session information to potential session participants.
- Text-based Protocol
- The Structure of SDP
 - Session Level Info
 - Name of the session
 - Originator of the session
 - Time that the session is to be active
 - Media Level Info
 - Media type
 - Port number
 - Transport protocol
 - Media format

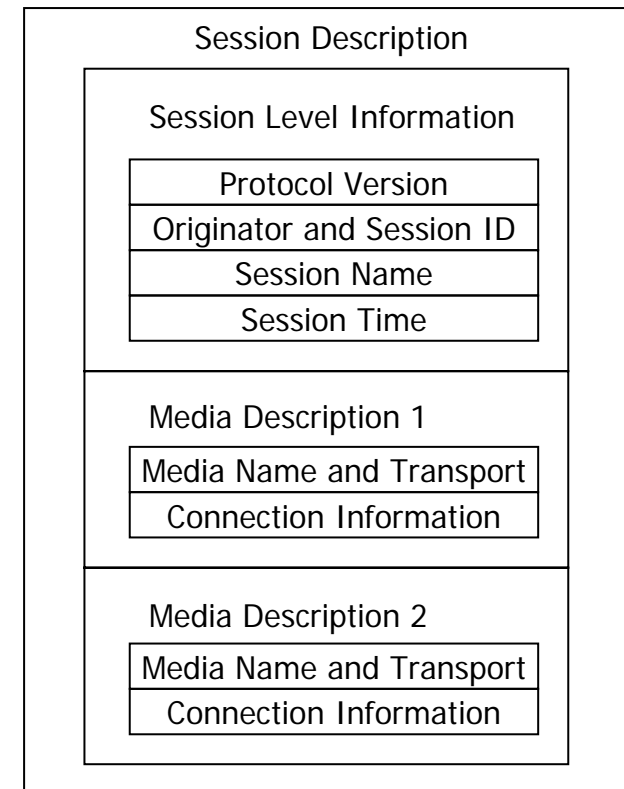



SDP Syntax

- A number of lines of text
- In each line
 - field=value
 - field is exactly one character (case-significant)
- Session-level fields
- Media-level fields
 - Begin with media description field (m=)



Mandatory Fields

- v=(protocol version)
- o=(session origin or creator)
- s=(session name), a text string
 - For multicast conference
- t=(time of the session), the start time and stop time
 - For pre-arranged multicast conference
- m=(media)
 - Media type
 - The transport port
 - The transport protocol
 - The media format (typically an RTP payload format)



Optional Fields [1/3]

- Some optional fields can be applied at both session and media levels.
 - The value applied at the media level overrides that at the session level
- i=(session information)
 - A text description
 - At both session and media levels
 - It would be somewhat superfluous since SIP already supports the Subject header.
- u=(URI of description)
 - Where further session information can be obtained
 - Only at session level



Optional Fields [2/3]

- e=(e-mail address)
 - Who is responsible for the session
 - Only at the session level
- p=(phone number)
 - Only at the session level
- c=(connection information)
 - Network type, address type and connection address
 - At session or media level
- b=(bandwidth information)
 - In kilobits per second
 - At session or media level



Optional Fields [3/3]

- r=(repeat times)
 - For regularly scheduled session a session is to be repeated
 - How often and how many times
- z=(timezone adjustments)
 - For regularly scheduled session
 - Standard time and daylight savings time
- k=(encryption key)
 - An encryption key or a mechanism to obtain it for the purposes of encrypting and decrypting the media
 - At session or media level
- a=(attributes)
 - Describe additional attributes



Ordering of Fields

- Session Level

- Protocol version (v)
- Origin (o)
- Session name (s)
- Session information (i)
- URI (u)
- E-mail address (e)
- Phone number (p)
- Connection info (c)
- Bandwidth info (b)
- Time description (t)
- Repeat info (r)
- Time zone adjustments (z)
- Encryption key (k)
- Attributes (a)

- Media level

- Media description (m)
- Media info (i)
- Connection info (c)
 - Optional if specified at the session level
- Bandwidth info (b)
- Encryption key (k)
- Attributes (a)



Subfields [1/3]

- Field = <value of subfield1 > <value of subfield2 >
<value of subfield3 >
- Origin
 - Username, the originator's login id or “-”
 - Session ID
 - A unique ID
 - Make use of NTP timestamp
 - Version, a version number for this particular session
 - Network type
 - A text string
 - IN refers to Internet
 - Address type
 - IP4, IP6
 - Address, a fully-qualified domain name or the IP address



Subfields [2/3]

- Connection Data
 - The network and address at which media data will be received
 - Network type
 - Address type
 - Connection address
- Media Information
 - Media type
 - Audio, video, data, or control
 - Port
 - Format
 - List the various types of media format that can be supported
 - According to the RTP audio/video profile
 - m= audio 45678 RTP/AVP 15 3 0
 - G.728, GSM, G.711



Subfields [3/3]

■ Attributes

- To enable additional information to be included
- Property attribute
 - a=sendonly
 - a=recvonly
- Value attribute
 - a=orient:landscape used in a shared whiteboard session
- Rtpmap attribute
 - The use of dynamic payload type
 - a=rtpmap:<payload type> <encoding name>/<clock rate> [/<encoding parameters>].
 - m=video 54678 RTP/AVP 98
 - a=rtpmap 98 L16/16000/2
 - 16-bit linear encoded stereo (2 channels) audio sampled at 16kHz



Usage of SDP with SIP

- SIP and SDP make a wonderful partnership for the transmission of session information.
- SIP provides the messaging mechanism for the establishment of multimedia sessions.
- SDP provides a structured language for describing the sessions.
 - The entity headers identifies the message body.



SIP Inclusion in SIP Messages

- Fig 5-15
 - G.728 is selected
- INVITE with multiple media streams
 - Unsupported should also be returned with a port number of zero
- An alternative
 - INVITE


```
m=audio 4444 RTP/AVP 2 4 15
a=rtpmap 2 G726-32/8000
a=rtpmap 4 G723/8000
a=rtpmap 15 G728/8000
```
 - 200 OK

```
m=audio 6666 RTP/AVP 15
a=rtpmap 15 G728/8000
```




Daniel<sip:Collins@station1.work.com>

Boss<sip:Manager@station2.work.com>

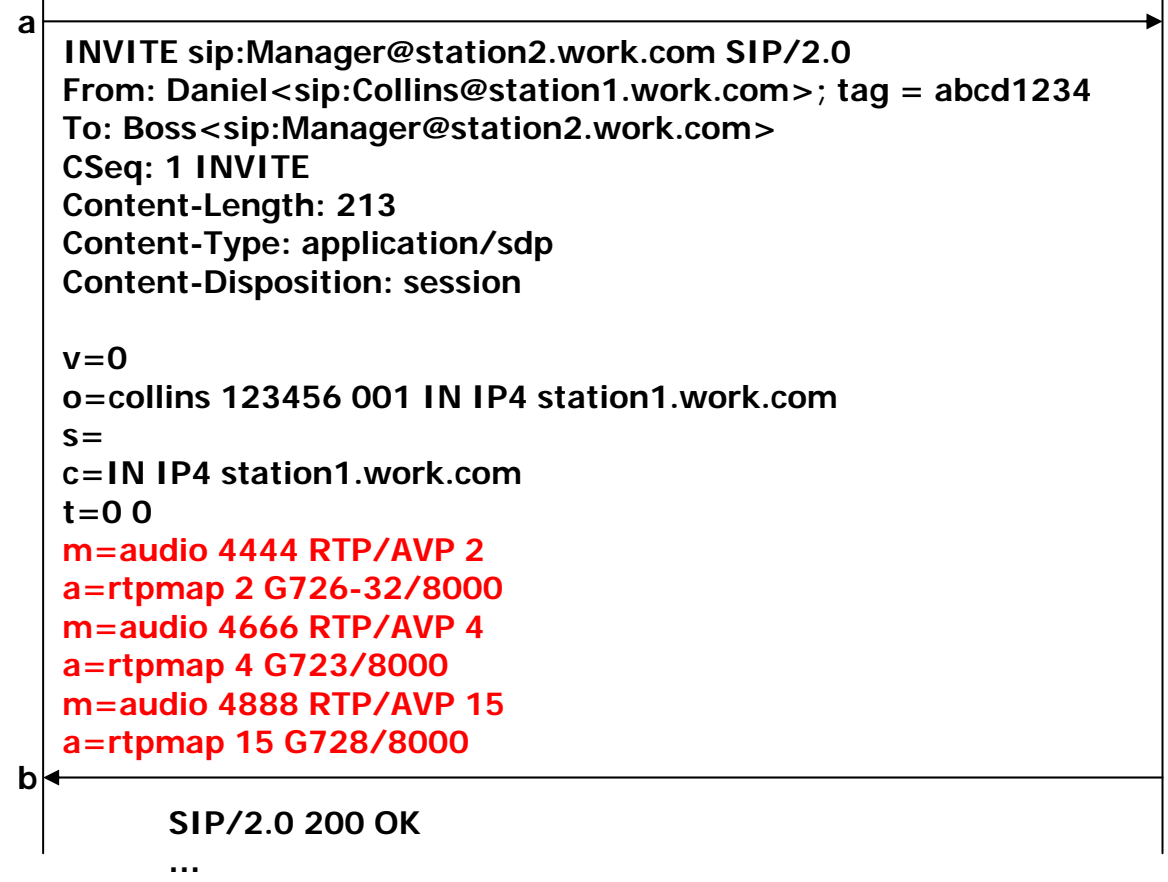

Daniel<sip:Collins@station1.work.com>

Boss<sip:Manager@station2.work.com>

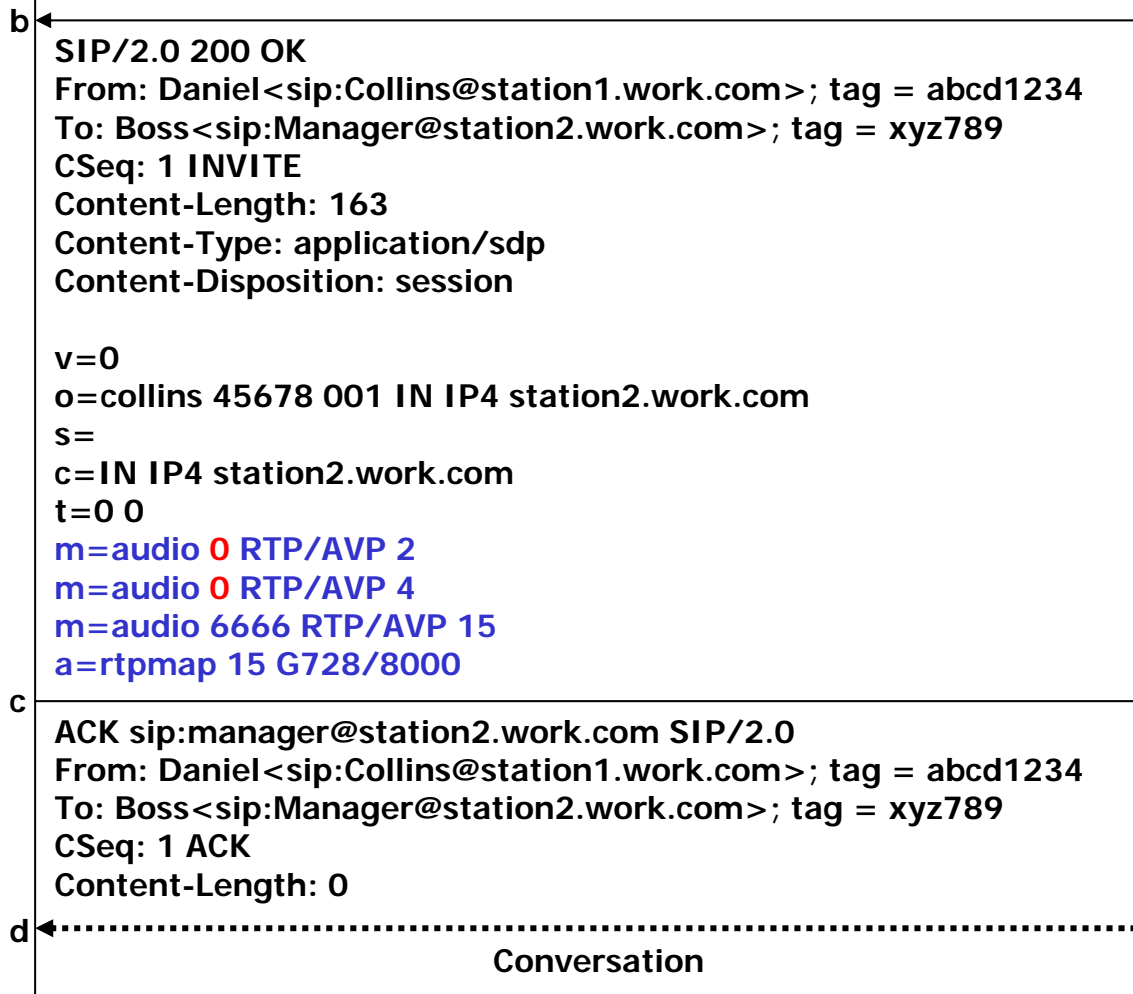




SIP and SDP Offer/Answer Model

- Re-INVITE is issued when the server replies with more than one codec.
 - With the same dialog identifier (To and From headers, including tag values), Call-ID and Request-URI
 - The session version is increased by 1 in o= line of message body.
- A mismatch
 - 488 or 606
 - Not Acceptable
 - A Warning header with warning code 304 (media type not available) or 305 (incompatible media type)
 - Then the caller issues a new INVITE request.

Daniel<sip:Collins@station1.work.com>



Boss<sip:Manager@station2.work.com>

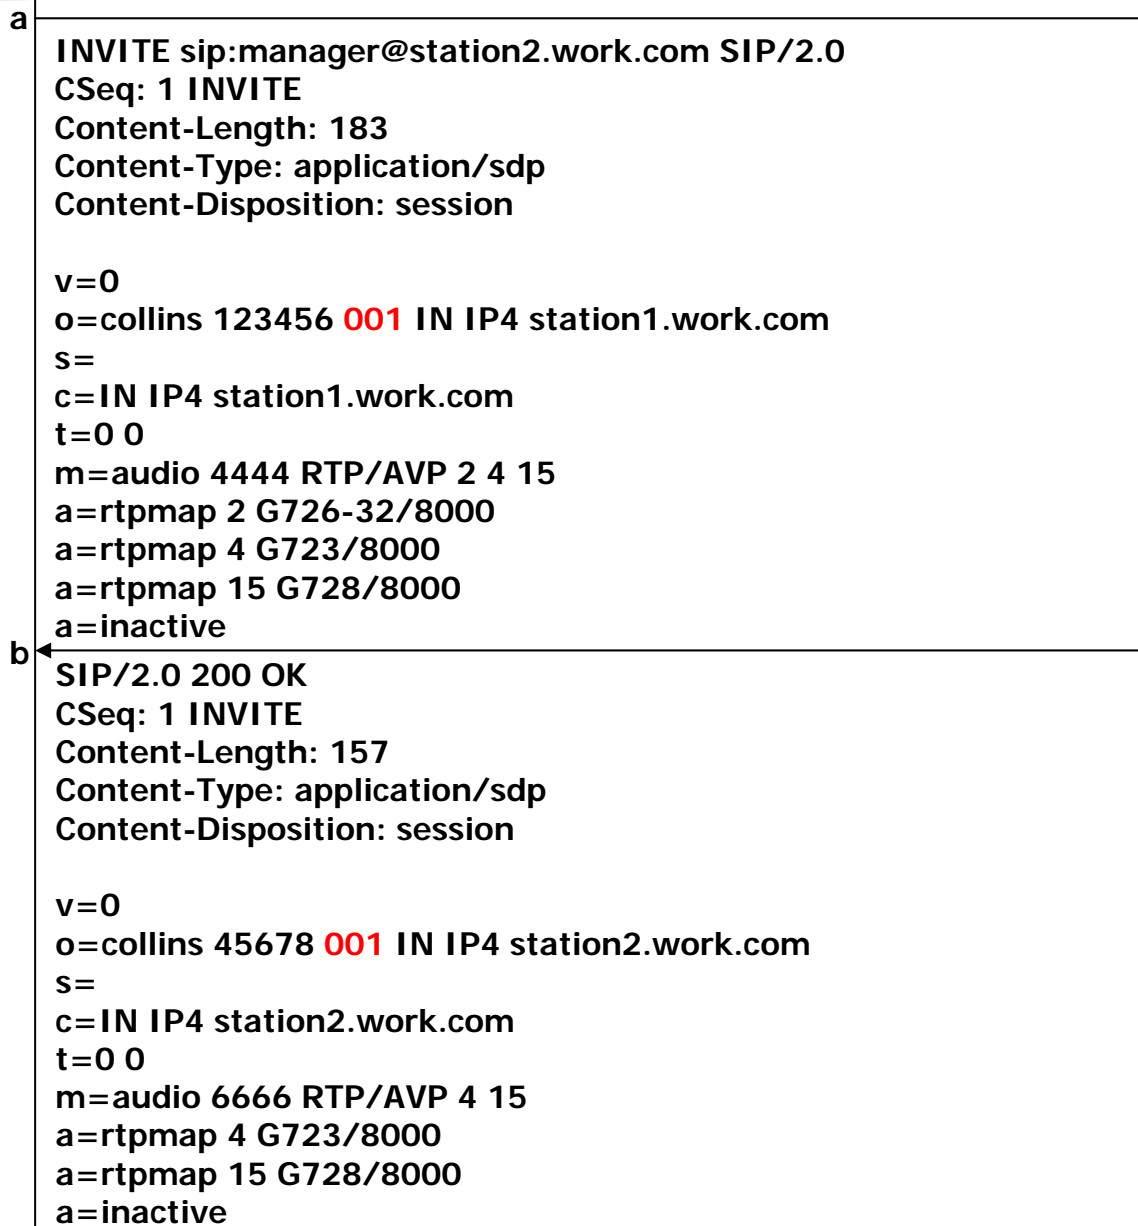

Daniel<sip:Collins@station1.work.com>

Boss<sip:Manager@station2.work.com>



c

ACK sip:manager@station2.work.com SIP/2.0
From: Daniel<sip:Collins@station1.work.com>; tag = abcd1234
To: Boss<sip:Manager@station2.work.com>; tag = xyz789
CSeq: 1 ACK
Content-Length: 0

d

INVITE sip:manager@station2.work.com SIP/2.0
CSeq: 2 INVITE
Content-Length: 126
Content-Type: application/sdp
Content-Disposition: session

v=0
o=collins 123456 002 IN IP4 station1.work.com
s=
c=IN IP4 station1.work.com
t=0 0
m=audio 4444 RTP/AVP 15
a=rtpmap 15 G728/8000



OPTIONS Method

- Determine the capabilities of a potential called party
- Accept Header
 - Indicate the type of information that the sender hopes to receive
- Allow Header
 - Indicate the SIP methods that Boss can handle
- Supported Header
 - Indicate the SIP extensions that can be supported

Daniel<sip:Collins@station1.work.com>

Boss<sip:Manager@station2.work.com>



a

```
OPTIONS sip:manager@station2.work.com SIP/2.0
Via: SIP/2.0/UDP Station1.work.com; branch=z9hG4bK7890123
From: Daniel<sip:Collins@work.com>; tag=lmnop123
To: Boss<sip:Manager@station2.work.com>
Call-ID: 123456@station1.work.com
Contact: Daniel<sip:Collins@station1.work.com>
CSeq: 1 OPTIONS
Accept: application/sdp
Content-Length: 0
```

b

```
SIP/2.0 200 OK
Via: SIP/2.0/UDP Station1.work.com; branch=z9hG4bK7890123
From: Daniel<sip:Collins@work.com>; tag=lmnop123
To: Boss<sip:Manager@station2.work.com>; tag=xyz5678
Call-ID: 123456@station1.work.com
CSeq: 1 OPTIONS
Allow: INVITE, ACK, CANCEL, OPTIONS, BYE
Supported: newfield
Content-Length: 146
Content-Type: application/sdp

v=0
o=manager 45678 001 IN IP4 station2.work.com
s=
c=IN IP4 station2.work.com
t=0 0
m=audio 0 RTP/AVP 4 15
a=rtpmap 4 G723/8000
a=rtpmap 15 G728/8000
```



SIP Extensions and Enhancements

- RFC 2543, March 1999
 - RFC 3261, June 2002
 - SIP has attracted enormous interest.
 - Traditional telecommunications companies, cable TV providers and ISP
- A large number of extensions to SIP have been proposed.
 - SIP will be enhanced considerably before it becomes an Internet standard.



183 Session Progress

- It has been included within the revised SIP spec.
 - To open one-way audio path from called end to calling end
 - Enable in-band call progress information to be transmitted
 - Tones or announcements
 - Interworking with SS7 network
 - ACM (Address Complete Message)
 - For SIP-PSTN-SIP connections



The Supported Header

- The Base RFC 2543
 - The Require: Header
 - In request (client ->server)
 - A client indicates that a server must support certain extension.
 - The Unsupported Header
 - In response (server -> client)
 - 420 (bad extension)
 - A cumbersome way of determining what extensions a server does or does not support
- The Supported: Header (RFC 3261)
 - May be included in OPTIONS request
 - Associated with the Supported: header is 421 (extension required) response.
 - Can also be included in responses




SIP INFO Method

- Be specified in RFC 2976
- For transferring information during an ongoing session
 - DTMF digits, account-balance information, mid-call signaling information (from PSTN)
 - Application-layer information could be transferred in the middle of a call.
- A powerful, flexible tool to support new services

SIP Event Notification

- Several SIP-based applications have been devised based on the concept of a user being informed of some event.
 - E.g., Instant messaging
- RFC 3265 has addressed the issue of event notification.
 - SUBSCRIBE and NOTIFY
 - The Event header

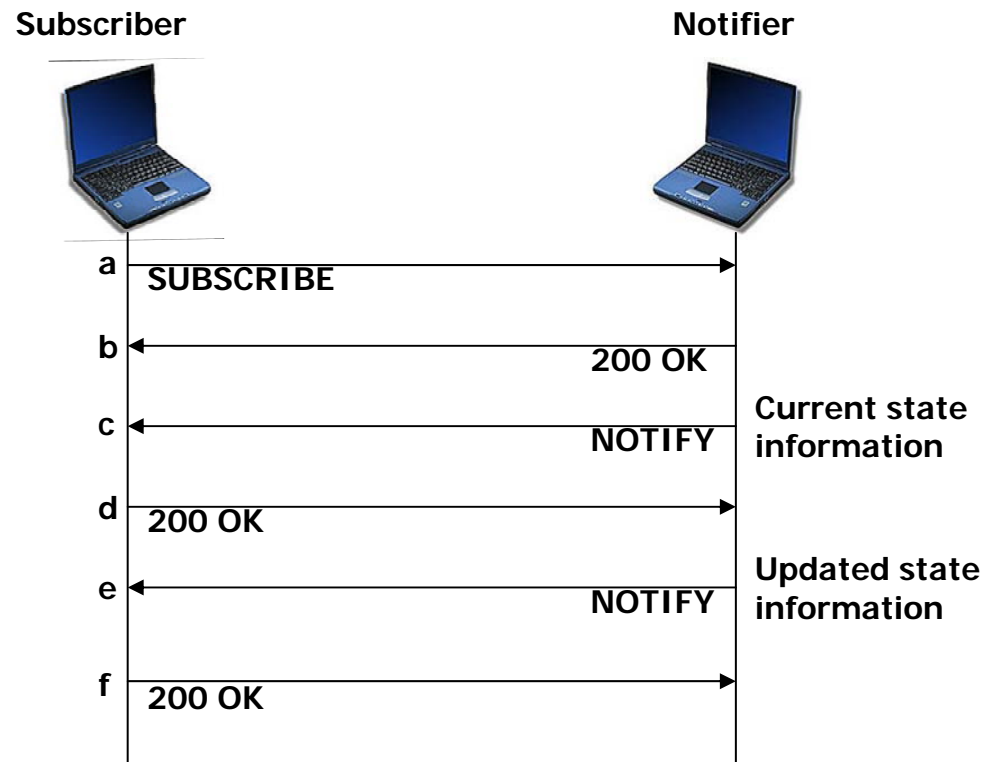



SIP for Instant Messaging

- The IETF working group – SIP for Instant Messaging and Presence Leveraging Extensions (SIMPLE)
- A new SIP method – MESSAGE
 - This request carries the actual message in a message body.
 - A MESSAGE request does not establish a SIP dialog.


Boss<sip:Manager@pc1.home.com>



sip:Server.work.com



Daniel<sip:Collins@station1.work.com>

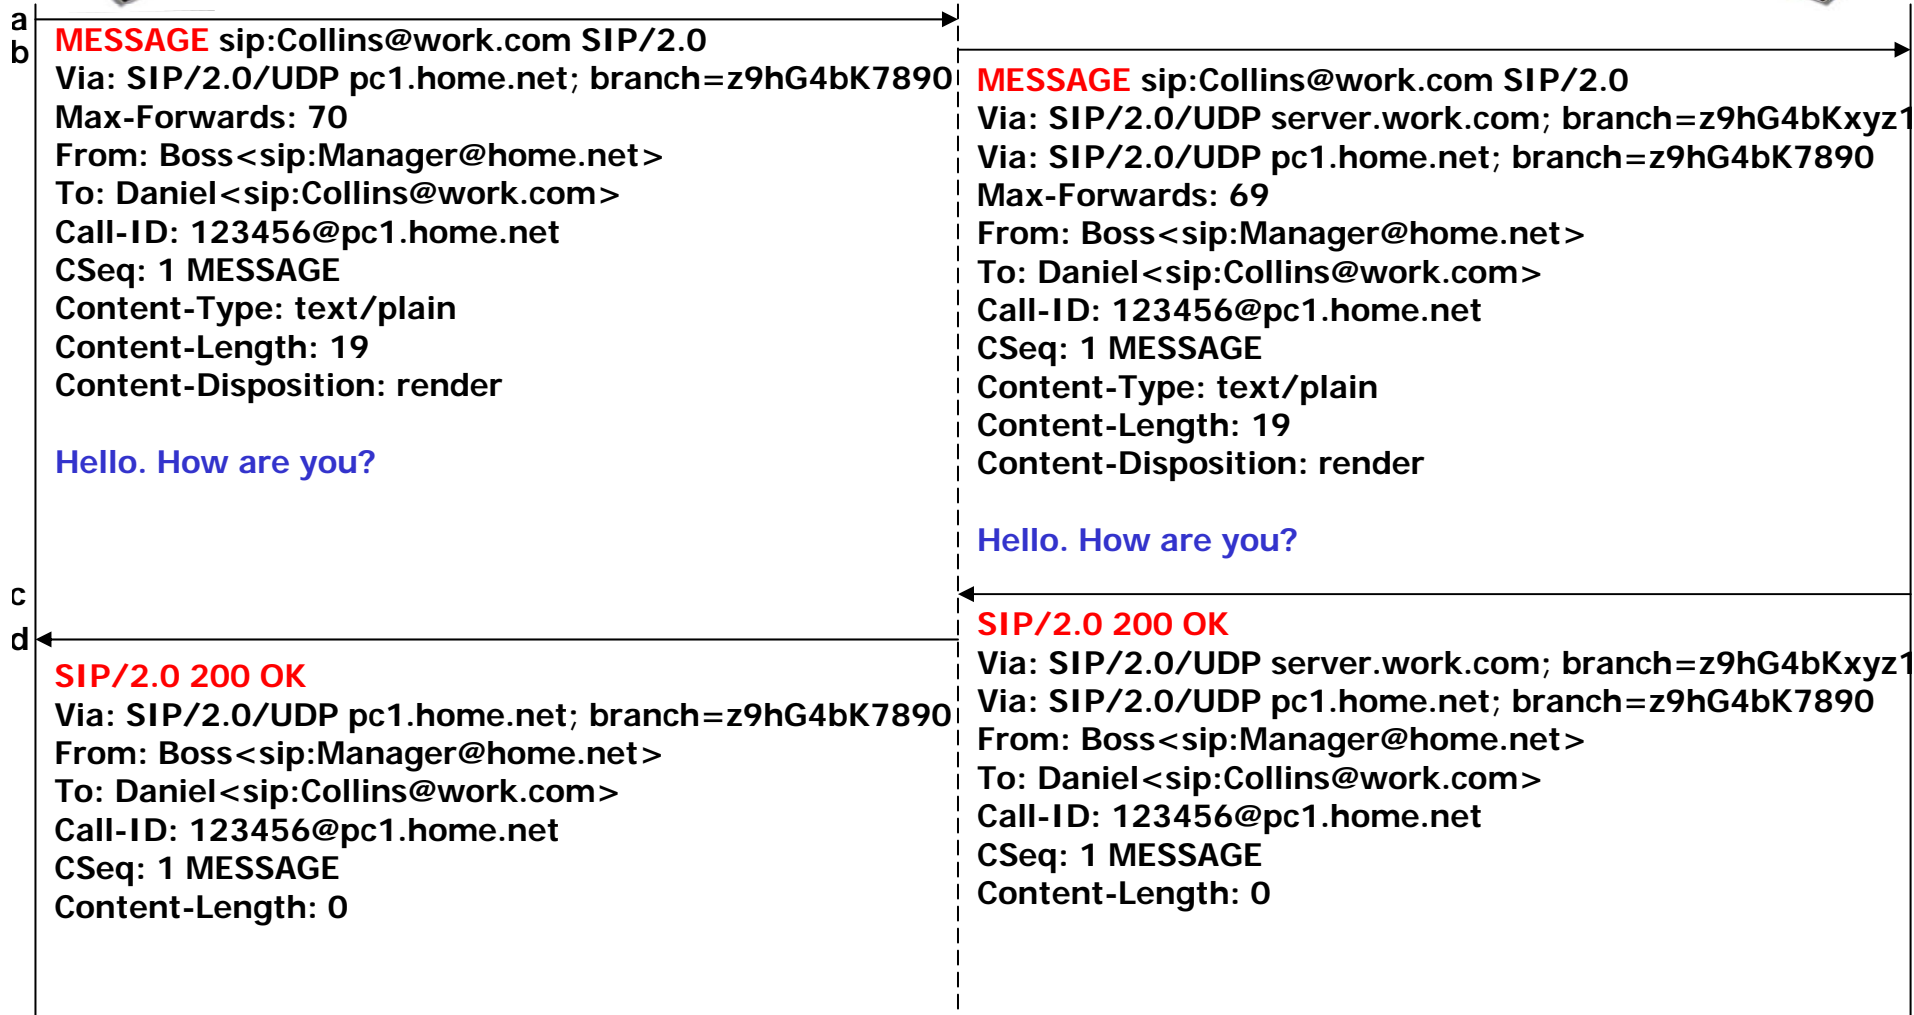

Boss<sip:Manager@pc1.home.com>



sip:Server.work.com



Daniel<sip:Collins@station1.work.com>



e
f

MESSAGE sip:Manager@home.net SIP/2.0
 Via: SIP/2.0/UDP server.work.com; branch=z9hG4bKabcd
 Via: SIP/2.0/UDP station1.work.com; branch=z9hG4bK123
 Max-Forwards: 69
 From: Daniel<sip:Collins@work.com>
 To: Boss<sip:Manager@home.net>
 Call-ID: 456789@station1.work.com
 CSeq: 1101 MESSAGE
 Content-Type: text/plain
 Content-Length: 22
 Content-Disposition: render

I'm fine. How are you?

g

SIP/2.0 200 OK
 Via: SIP/2.0/UDP server.work.com; branch=z9hG4bKabcd
 Via: SIP/2.0/UDP station1.work.com; branch=z9hG4bK123
 From: Daniel<sip:Collins@work.com>
 To: Boss<sip:Manager@home.net>
 Call-ID: 456789@station1.work.com
 CSeq: 1101 MESSAGE
 Content-Length: 0

MESSAGE sip:Manager@home.net SIP/2.0
 Via: SIP/2.0/UDP station1.work.com; branch=z9hG4bK123
 Max-Forwards: 70
 From: Daniel<sip:Collins@work.com>
 To: Boss<sip:Manager@home.net>
 Call-ID: 456789@station1.work.com
 CSeq: 1101 MESSAGE
 Content-Type: text/plain
 Content-Length: 22
 Content-Disposition: render

I'm fine. How are you?

SIP/2.0 200 OK
 Via: SIP/2.0/UDP station1.work.com; branch=z9hG4bK123
 From: Daniel<sip:Collins@work.com>
 To: Boss<sip:Manager@home.net>
 Call-ID: 456789@station1.work.com
 CSeq: 1101 MESSAGE
 Content-Length: 0




SIP REFER Method

- To enable the sender of the request to instruct the receiver to contact a third party
 - With the contact details for the third party included within the REFER request
 - For Call Transfer applications
- The Refer-to: and Refer-by: Headers
- The dialog between Mary and Joe remains established.
 - Joe could return to the dialog after consultation with Susan.

sip:Mary@station1.work.com

sip:Joe@station2.work.com

sip:Susan@station3.work.com

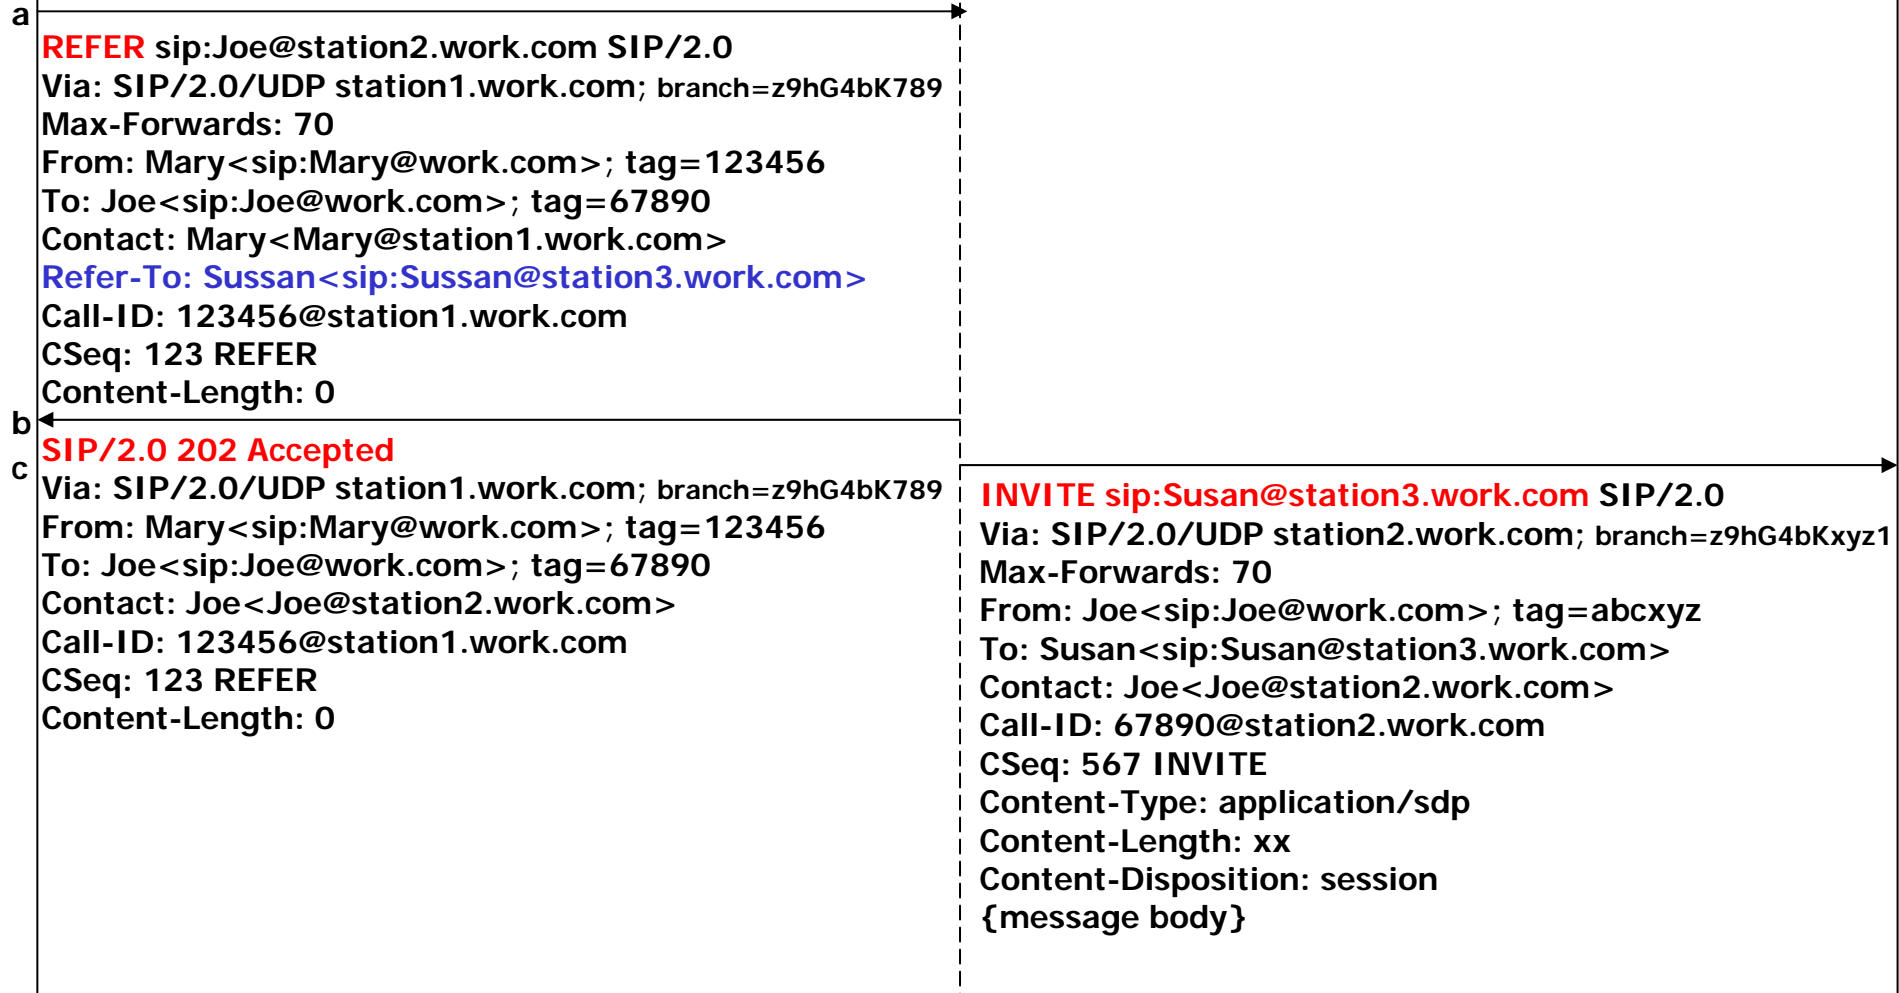


sip:Mary@station1.work.com



sip:Joe@station2.work.com



sip:Susan@station3.work.com

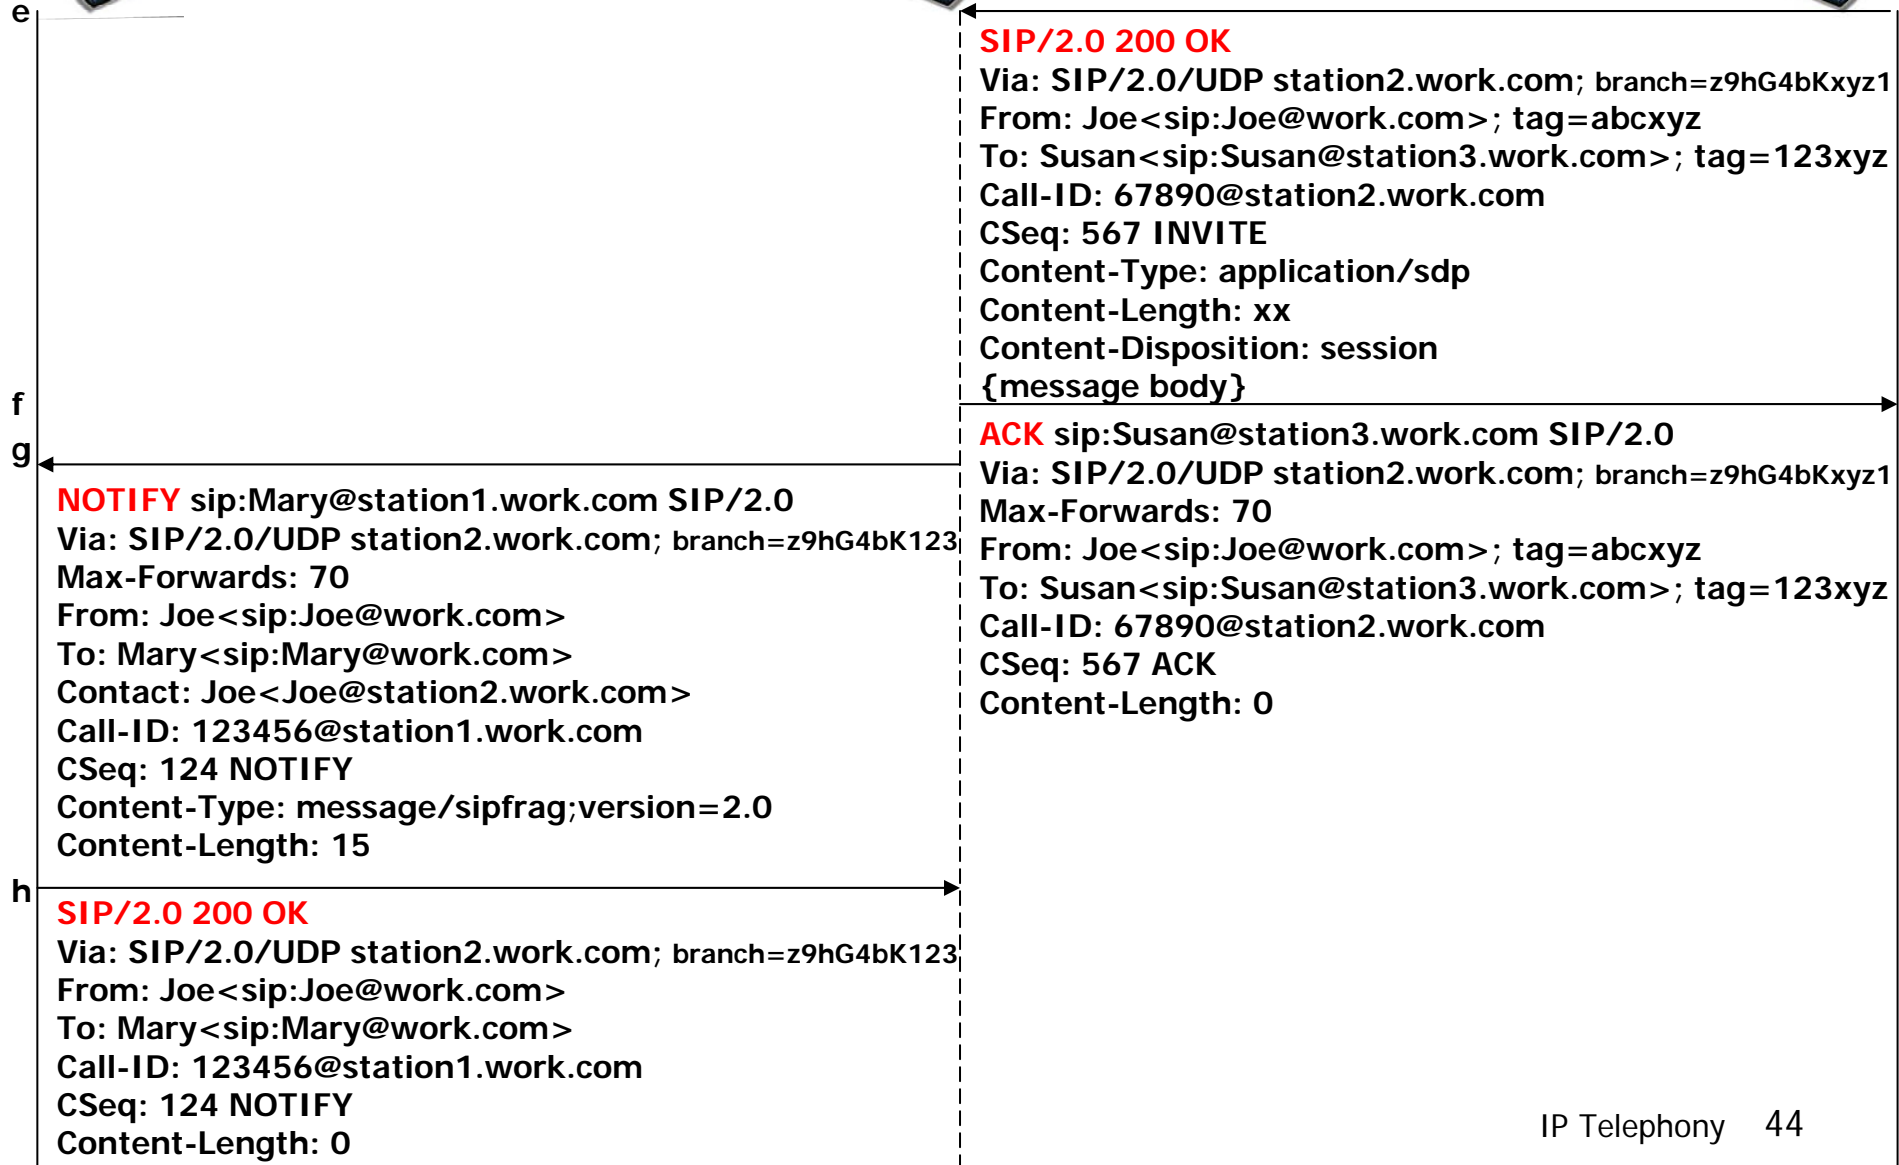




Reliability of Provisional Responses [1/2]

- Provisional Responses
 - 100 (trying), 180 (ringing), 183 (session in progress)
 - Are not answered with an ACK
- If the messages is sent over UDP
 - Unreliable
- Lost provisional response may cause problems when interoperating with other network
 - 180, 183 → Q.931 alerting or ISUP ACM
 - To drive a state machine
 - E.g., a call to an unassigned number
 - ACM to create a one-way path to relay an announcement such as “The number you have called has been changed”
 - If the provisional response is lost, the called might left in the dark and not understand why the call did not connect.

Reliability of Provisional Responses [2/2]


- RFC 3262
 - Reliability of Provisional Responses in SIP
- Supported: 100rel
- RSeq Header
 - Response Seq
 - +1, when retxm
- RACK Header
 - Response ACK
 - In PRACK
 - RSeq+CSeq
- PRACK
 - Prov. Resp. ACK
- Should not
 - Apply to 100
- Default timer value = 0.5 s

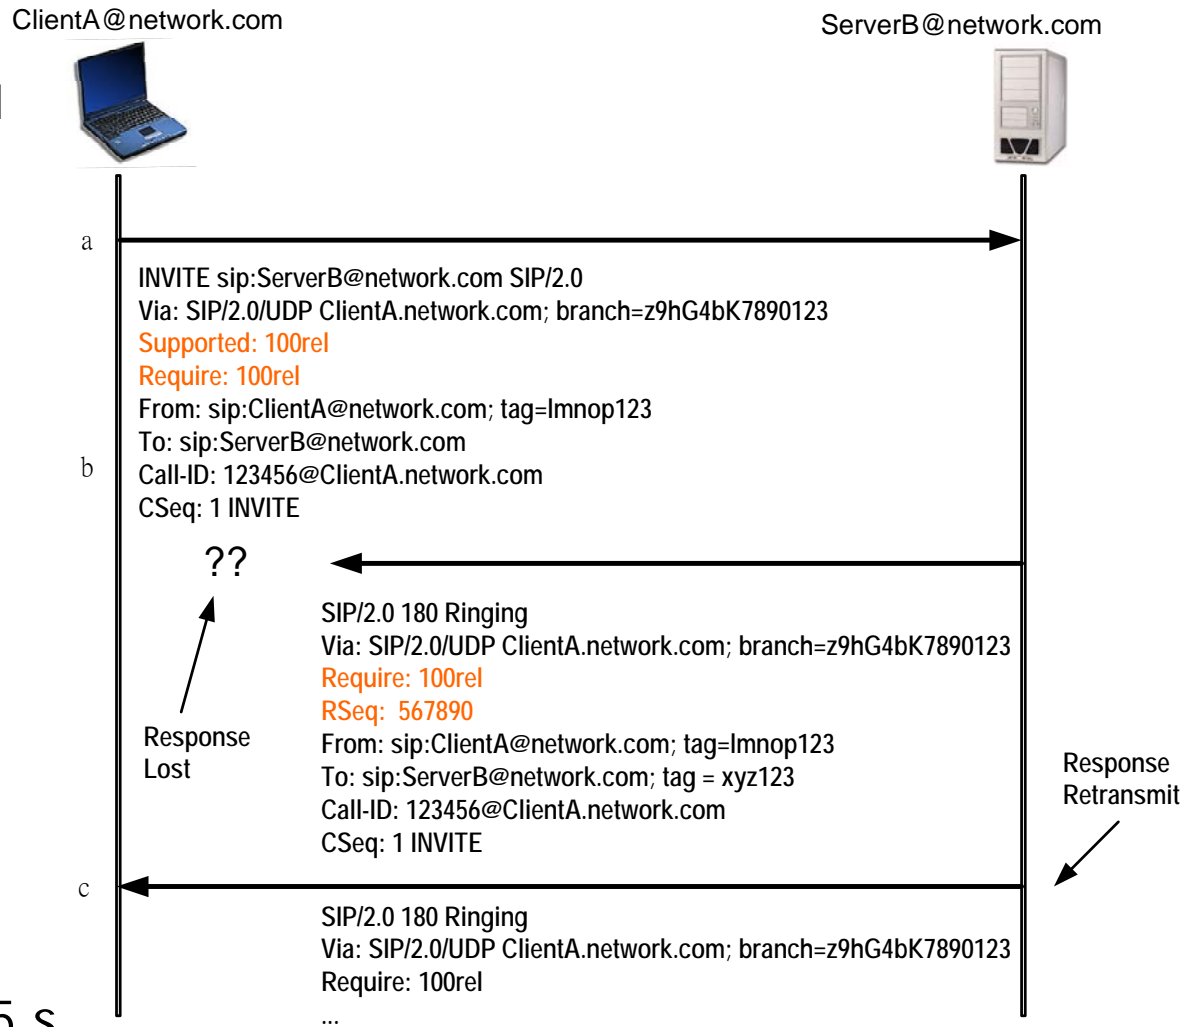

ClientA@network.com



ServerB@network.com

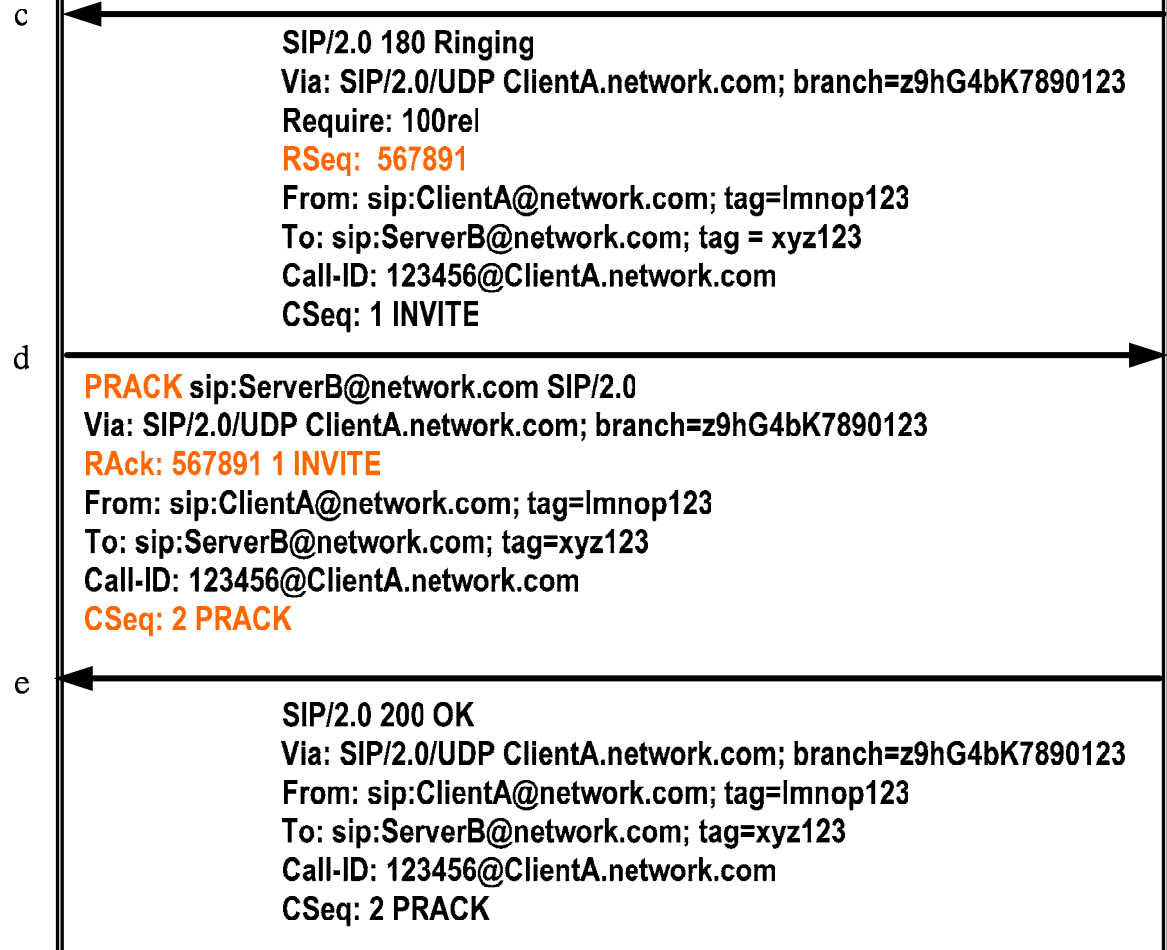



The SIP UPDATE Method

- To enable the modification of session information before a final response to an INVITE is received
 - The dialog is in the early state (An INVITE that receives a 183 response that includes a message body)
 - The message body might establish a media stream from callee to caller for sending a ring tone or music while the called party is alerted.
 - The UPDATE method can be used to change the codec
- Another important usage is when reserving network resources as part of a SIP session establishment.




Integration of SIP Signaling and Resource Management [1/2]

- Ensuring that sufficient resources are available to handle a media stream is very important.
 - To provide a high-quality service for a carrier-grade network
- The signaling might take a different path from the media.
 - The successful transfer of signaling messages does not imply to a successful transfer of media.
- Assume resource-reservation mechanisms are available (Chapter 8)
 - On a per-session basis
 - End-to-end network resources are reserved as part of session establishment.
 - On an aggregate basis
 - A certain amount of network resources are reserved in advance for a certain type of usage.
 - Policing functions at the edge of the network

Integration of SIP Signaling and Resource Management [2/2]

- Reserving network resources in advance of altering the called user
- A new draft – “Integration of Resource Management and SIP”
 - By using the provisional responses and UPDATE method
 - By involving extensions to SDP

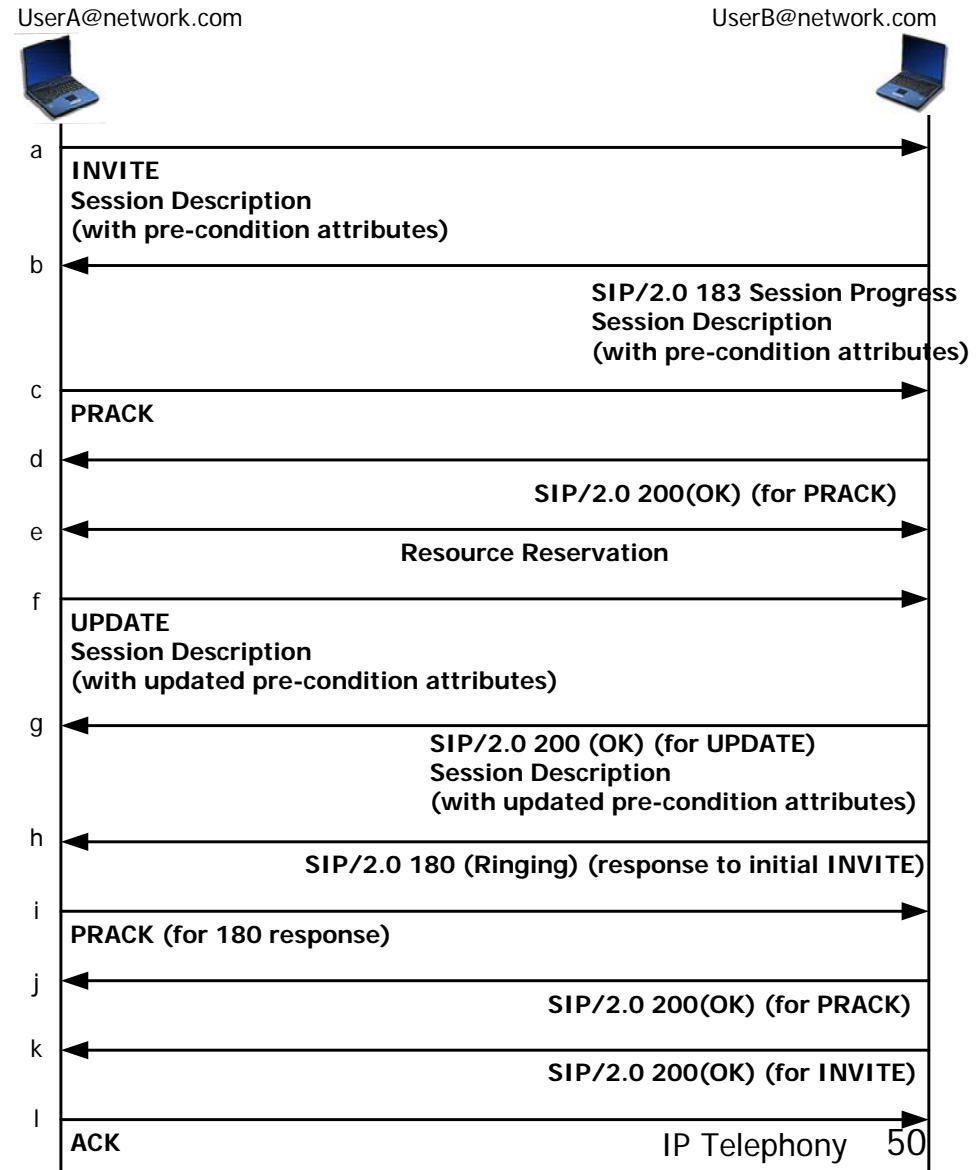



Example of e2e Resource Reservation [1/2]

- SDP for initial INVITE

```
v=0
o=userA 45678 001 IN IP4 stationA.network.com
S=
c=IN IP4 stationA.network.com
t=0 0
m=audio 4444 RTP/AVP 0
a=curr: qos e2e none
a=des: qos mandatory e2e sendrecv
```

- SDP for 183 response

```
v=0
o=userB 12345 001 IN IP4 stationB.network.com
S=
c=IN IP4 stationB.network.com
t=0 0
m=audio 6666 RTP/AVP 0
a=curr: qos e2e none
a=des: qos mandatory e2e sendrecv
a=conf: qos e2e recv
```



Example of e2e Resource Reservation [2/2]

- SDP for UPDATE


```
v=0
o=userA 45678 001 IN IP4 stationA.network.com
S=
c=IN IP4 stationA.network.com
t=0 0
m=audio 4444 RTP/AVP 0
a=curr: qos e2e send
a=des: qos mandatory e2e sendrecv
```

- SDP for 200 response

```
v=0
o=userB 12345 001 IN IP4 stationB.network.com
S=
c=IN IP4 stationB.network.com
t=0 0
m=audio 6666 RTP/AVP 0
a=curr: qos e2e sendrecv
a=des: qos mandatory e2e sendrecv
```

Example of Aggregate-based Reservation

- Each participant deals with network access permission at its own end.
- Mandatory** means that the session can not continue unless the required resources are definitely available.
- None** is the initial situation and indicates that no effort to reserve resources has yet taken place.
- Response 580** (precondition failure)

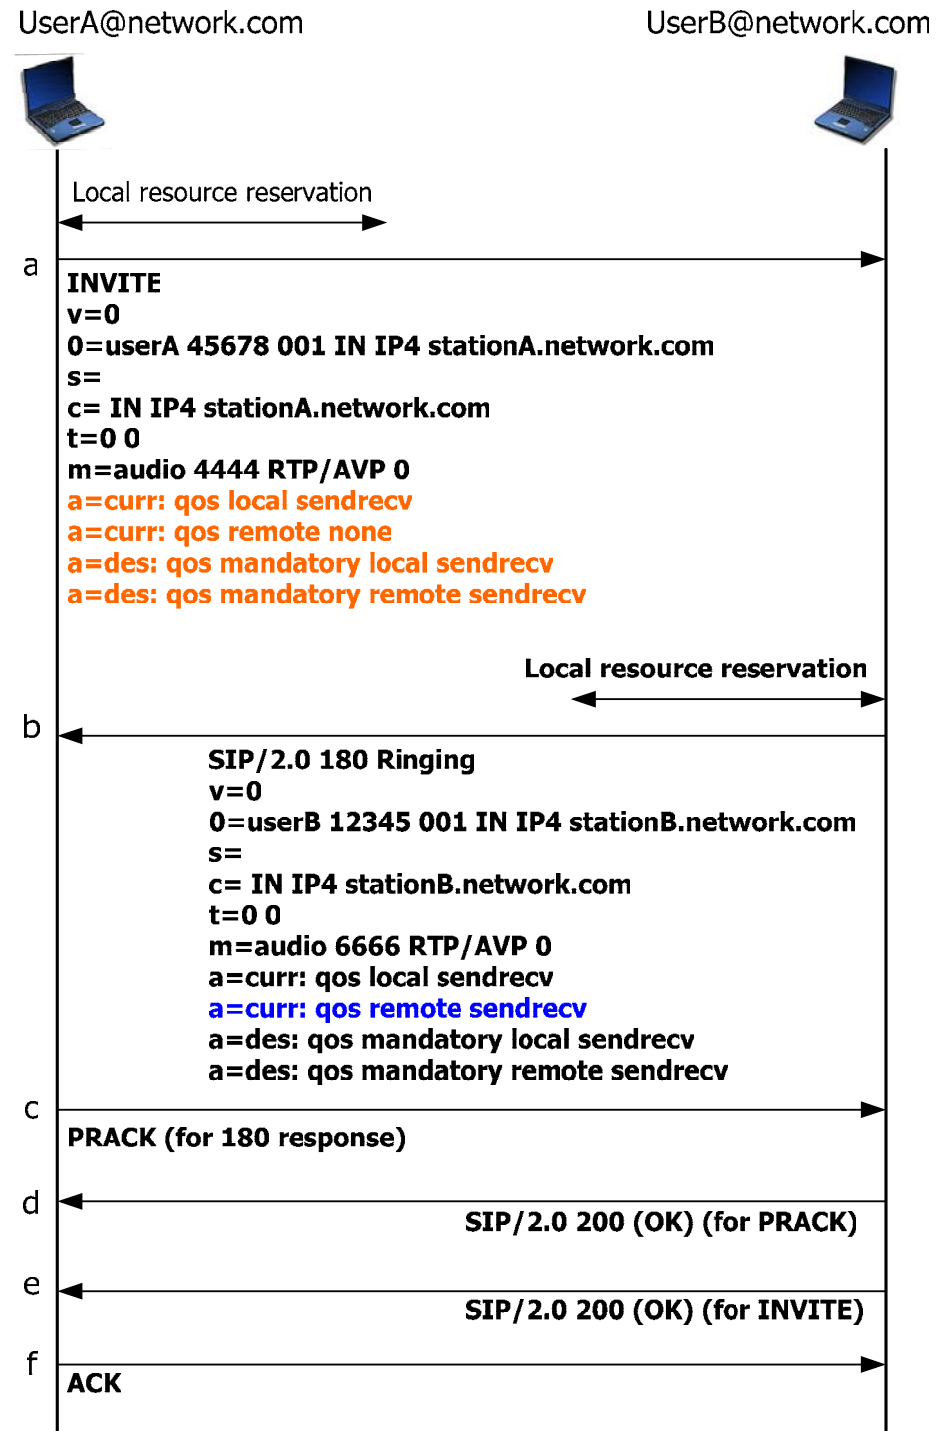




Usage of SIP for Features/Services [1/2]

- Call-transfer application (with REFER method)
- Personal Mobility through the use of registration
- One number service through forking proxy
- Call-completion services by using Retry-After: header
- To carry MIME content as well as an SDP description
 - To include a piece of text, an HTML document, an image and so on
- SIP address is a URL
 - Click-to-call applications
- The existing supplementary services in traditional telephony
 - Call waiting, call forwarding, multi-party calling, call screening


Usage of SIP for Features/Services [2/2]

- Proxy invokes various types of advanced feature logic.
 - Policy server (call-routing, QoS)
 - Authentication server
 - Use the services of an IN SCP over INAP
- The network might use the Parley Open Service Access (OSA) approach, utilizing application programming interfaces (APIs) between the nodes.

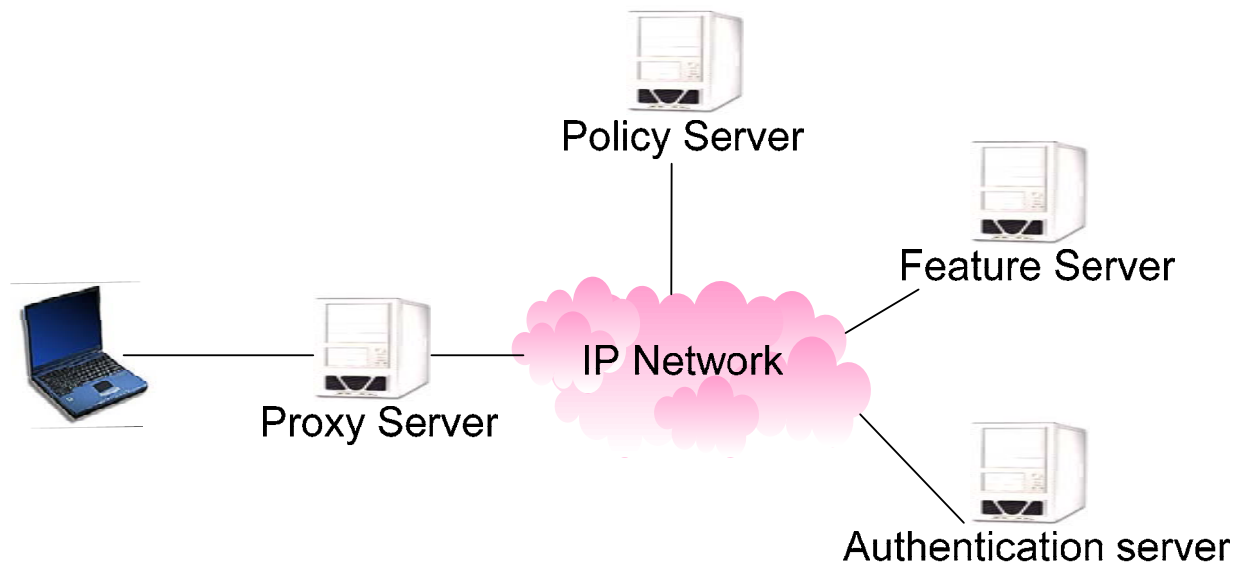


Call Forwarding

- On busy
- 486, busy here
- With the same To, User 3 can recognize that this call is a forwarded call, originally sent to User 2.
- Contact: header in 200 response
- Call-forwarding-on-no-answer
 - Timeout
 - CANCEL method

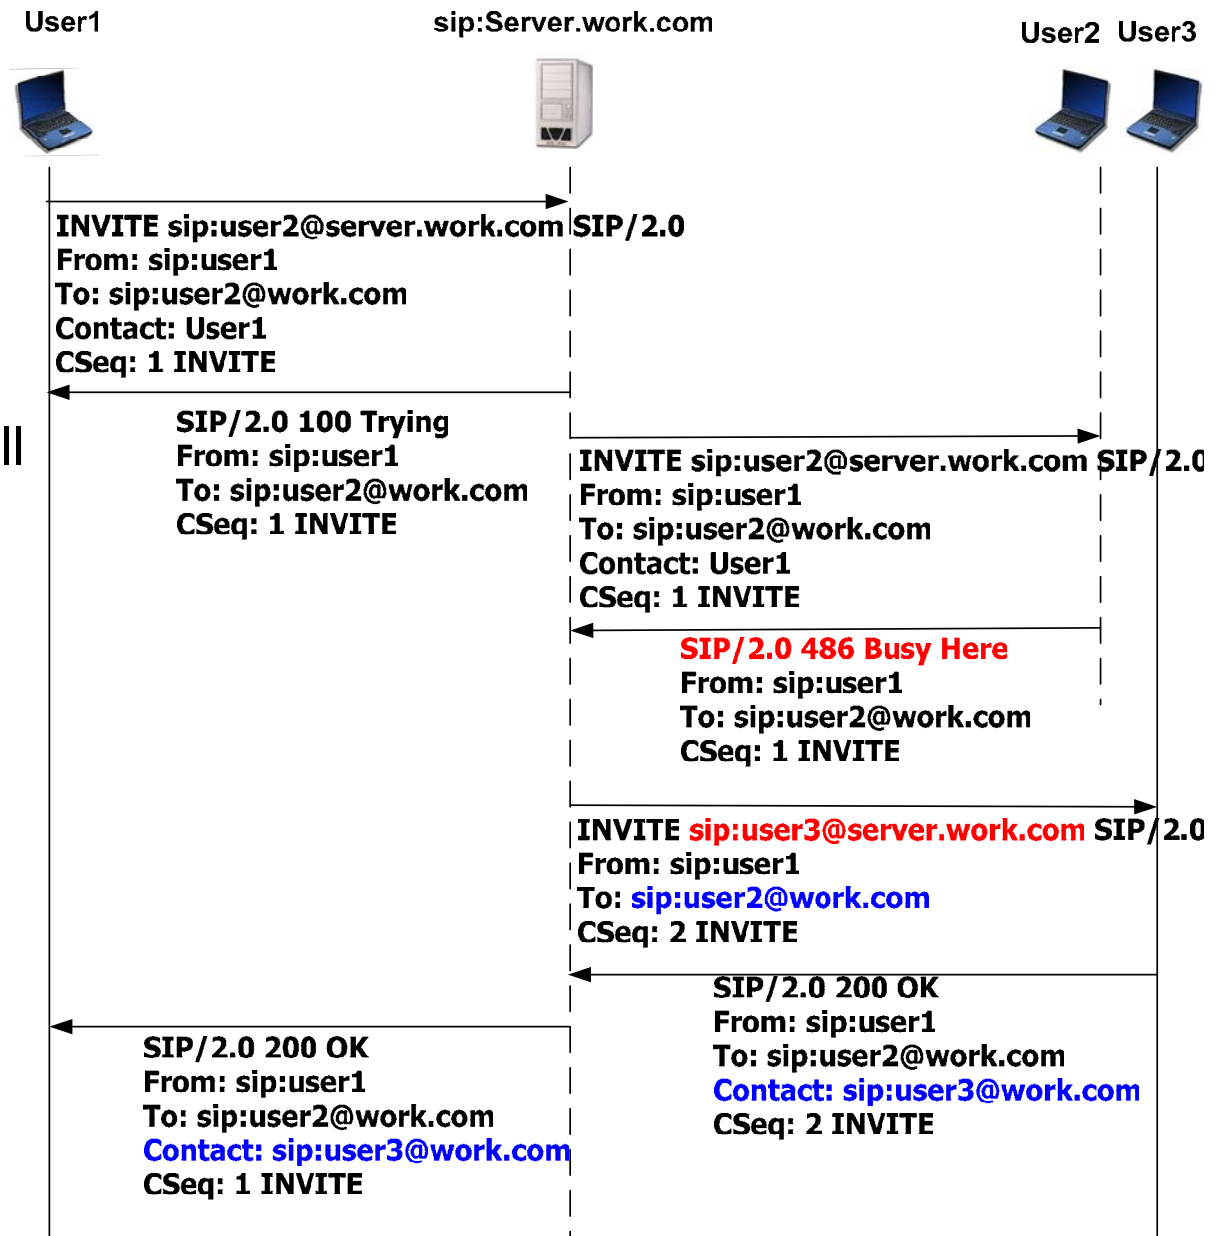


Consultation Hold

- A SIP UPDATE
- User A asks User B a question, and User B needs to check with User C for the correct answer.
- If User C needs to talk to User A directly, User B could use the REFER method to transfer the call to User C.

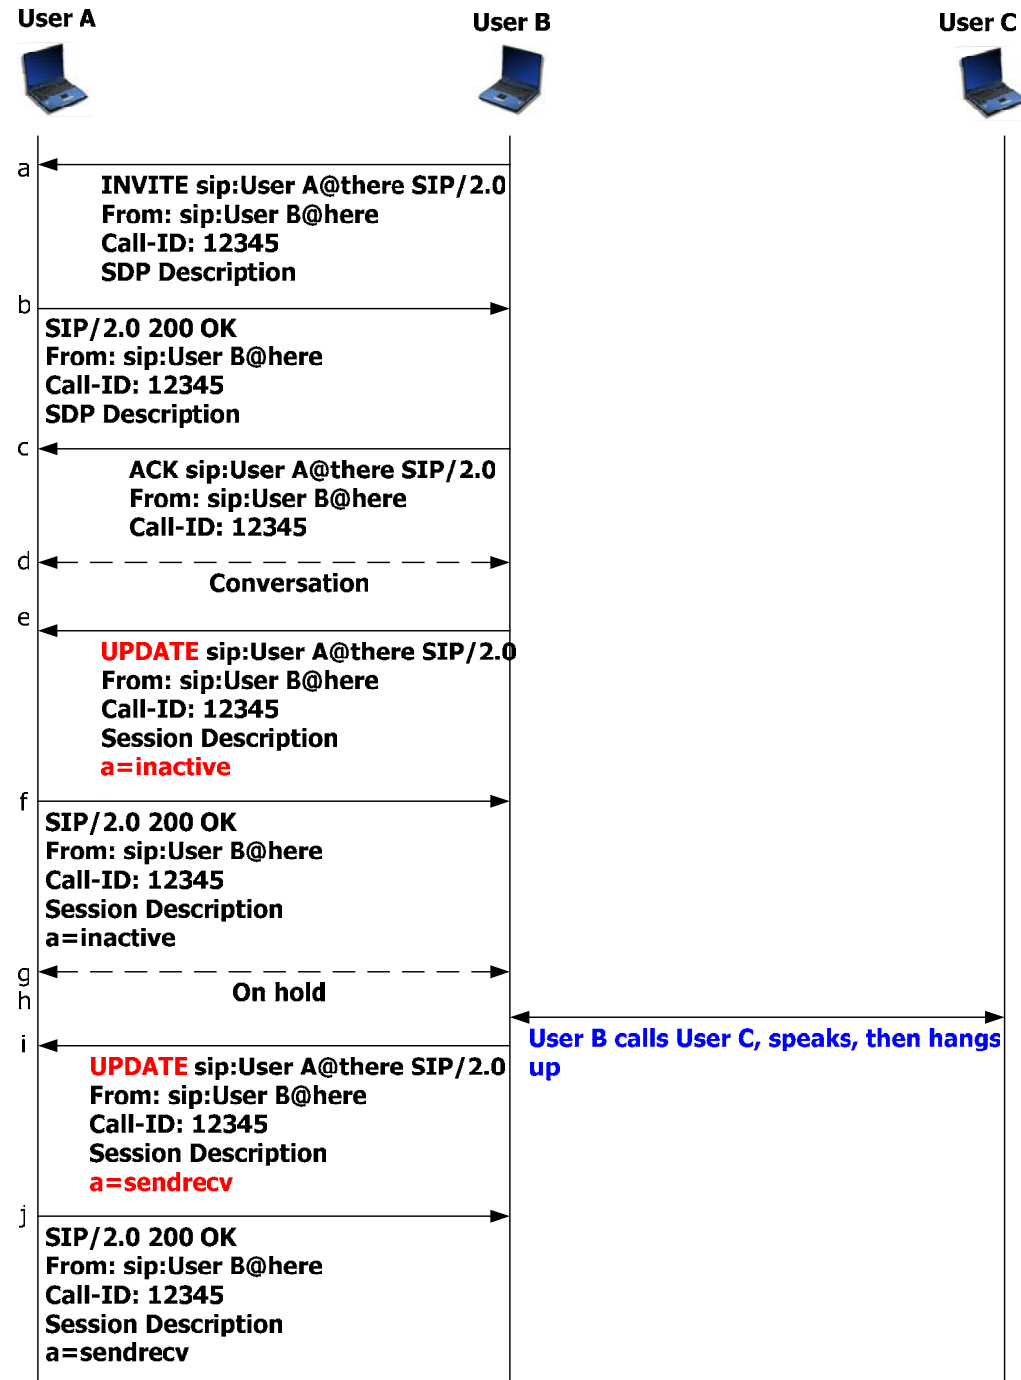


PSTN Interworking


- PSTN Interworking
 - A SIP URL to a telephone number
 - A network gateway
- Seamless interworking between two different protocols is not quite easy.
 - One-to-one mapping between these protocols
- PSTN – SIP – PSTN
 - MIME media types
 - For ISUP
 - SIP for Telephony (SIP-T)
- The whole issue of interworking with SS7 is fundamental to the success of VoIP in the real world.

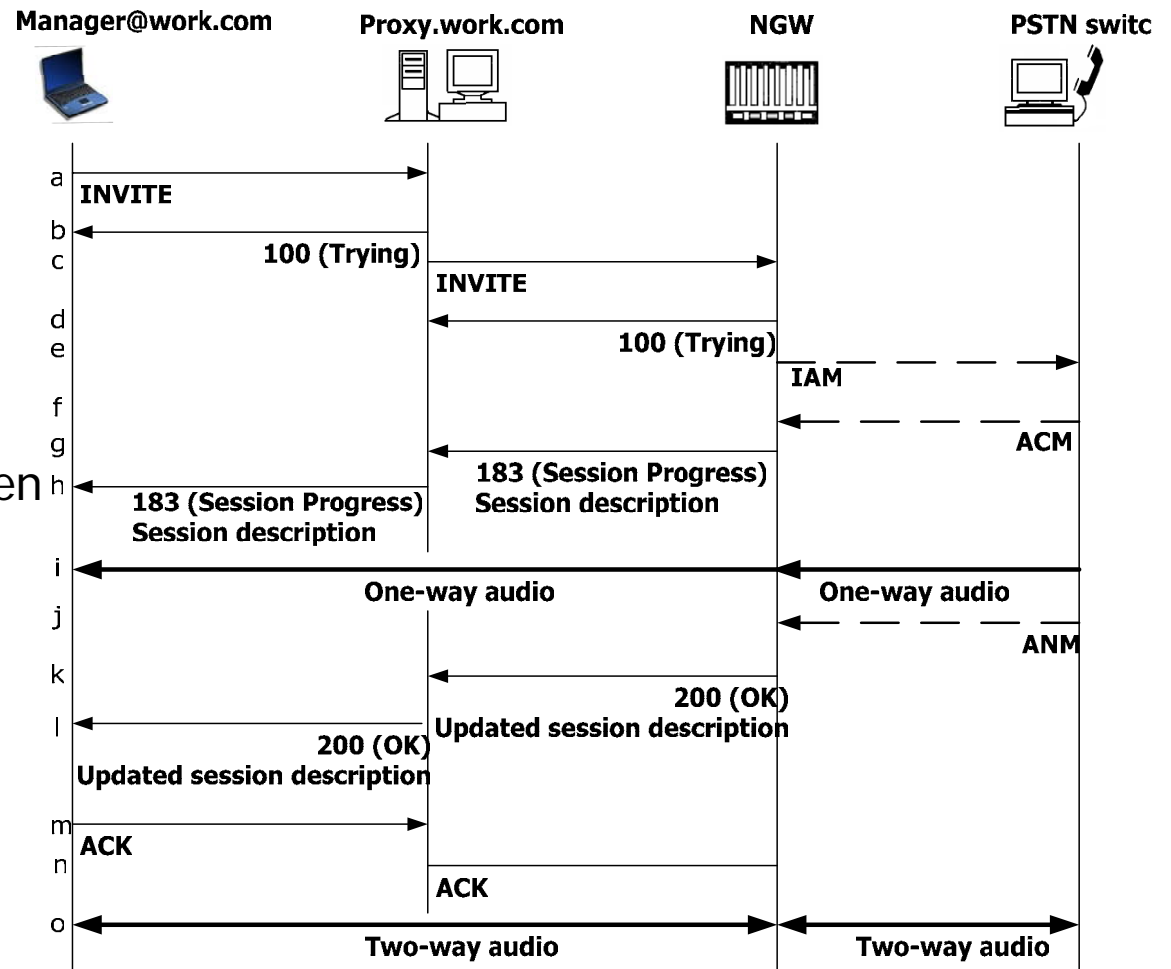



Interworking with H.323

- SIP-H.323 interworking gateway

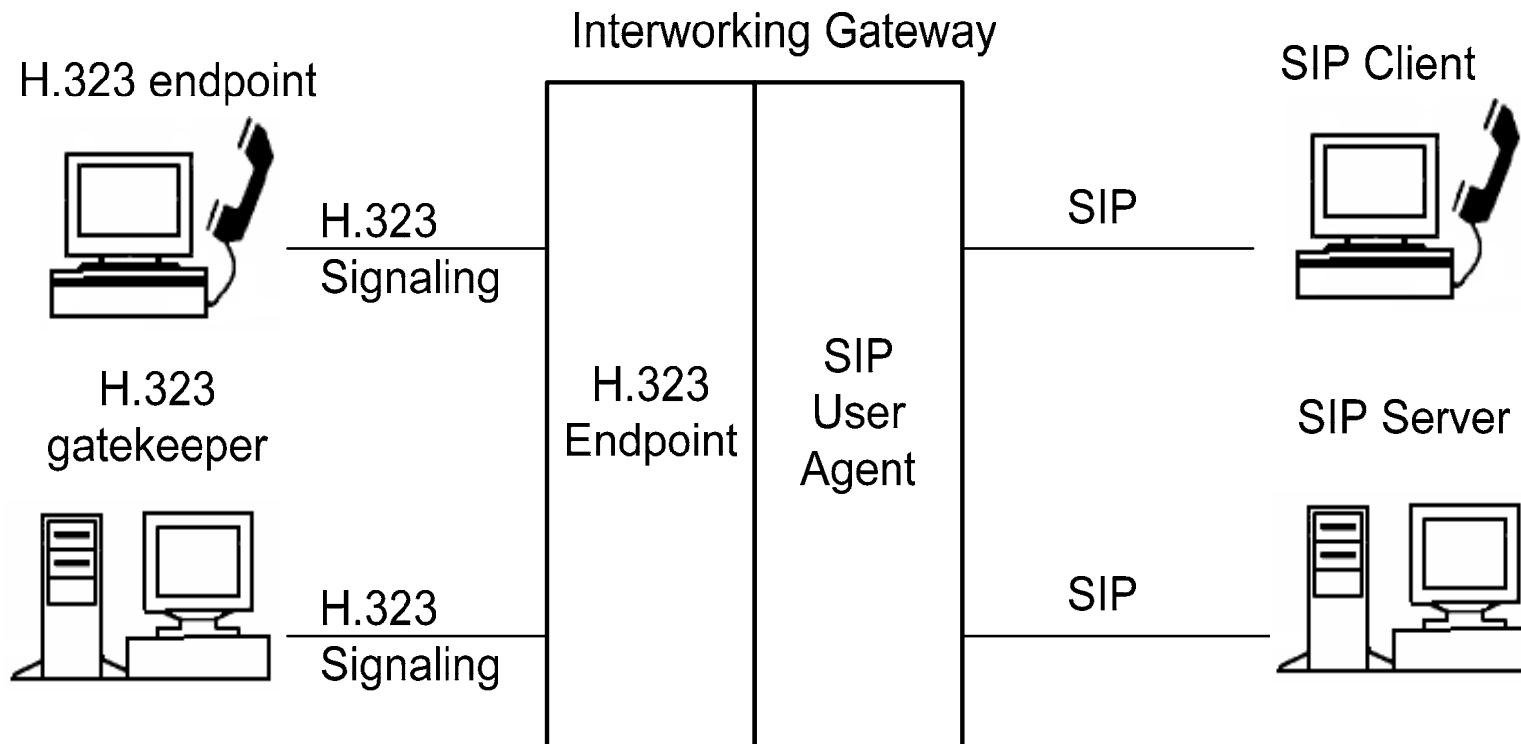

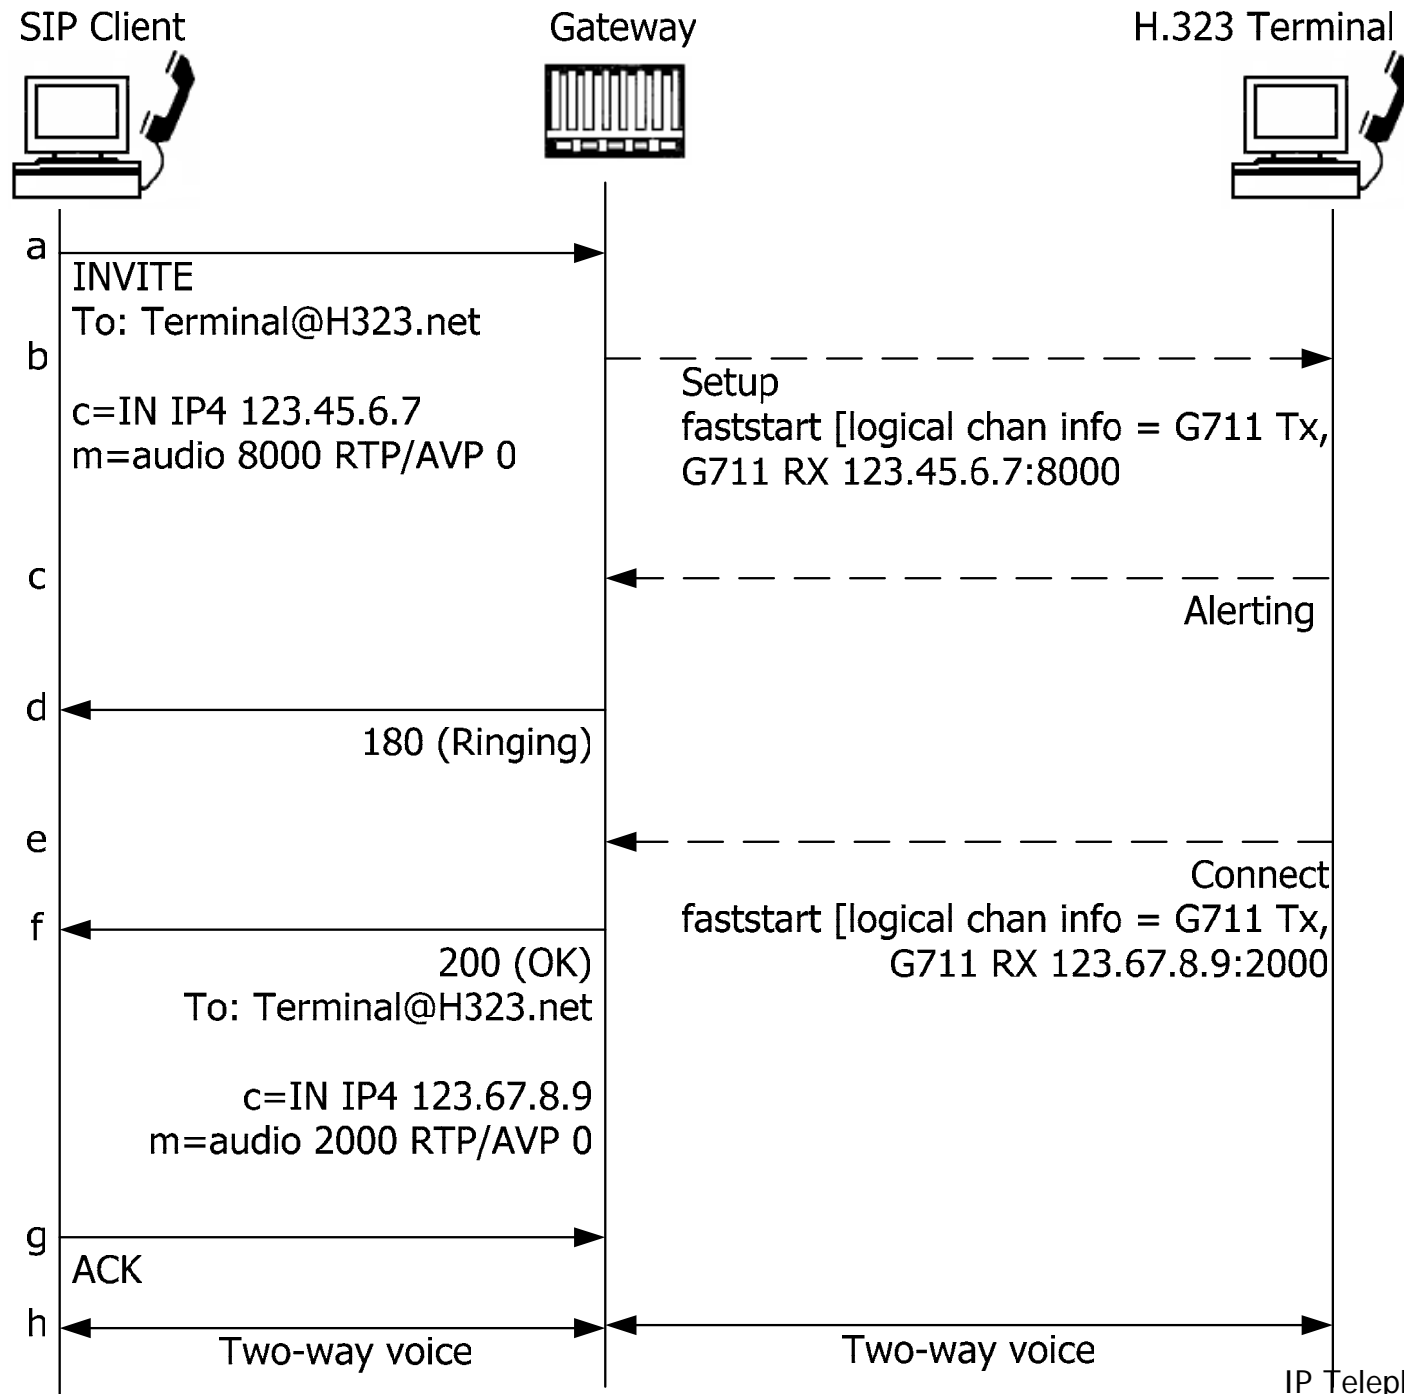

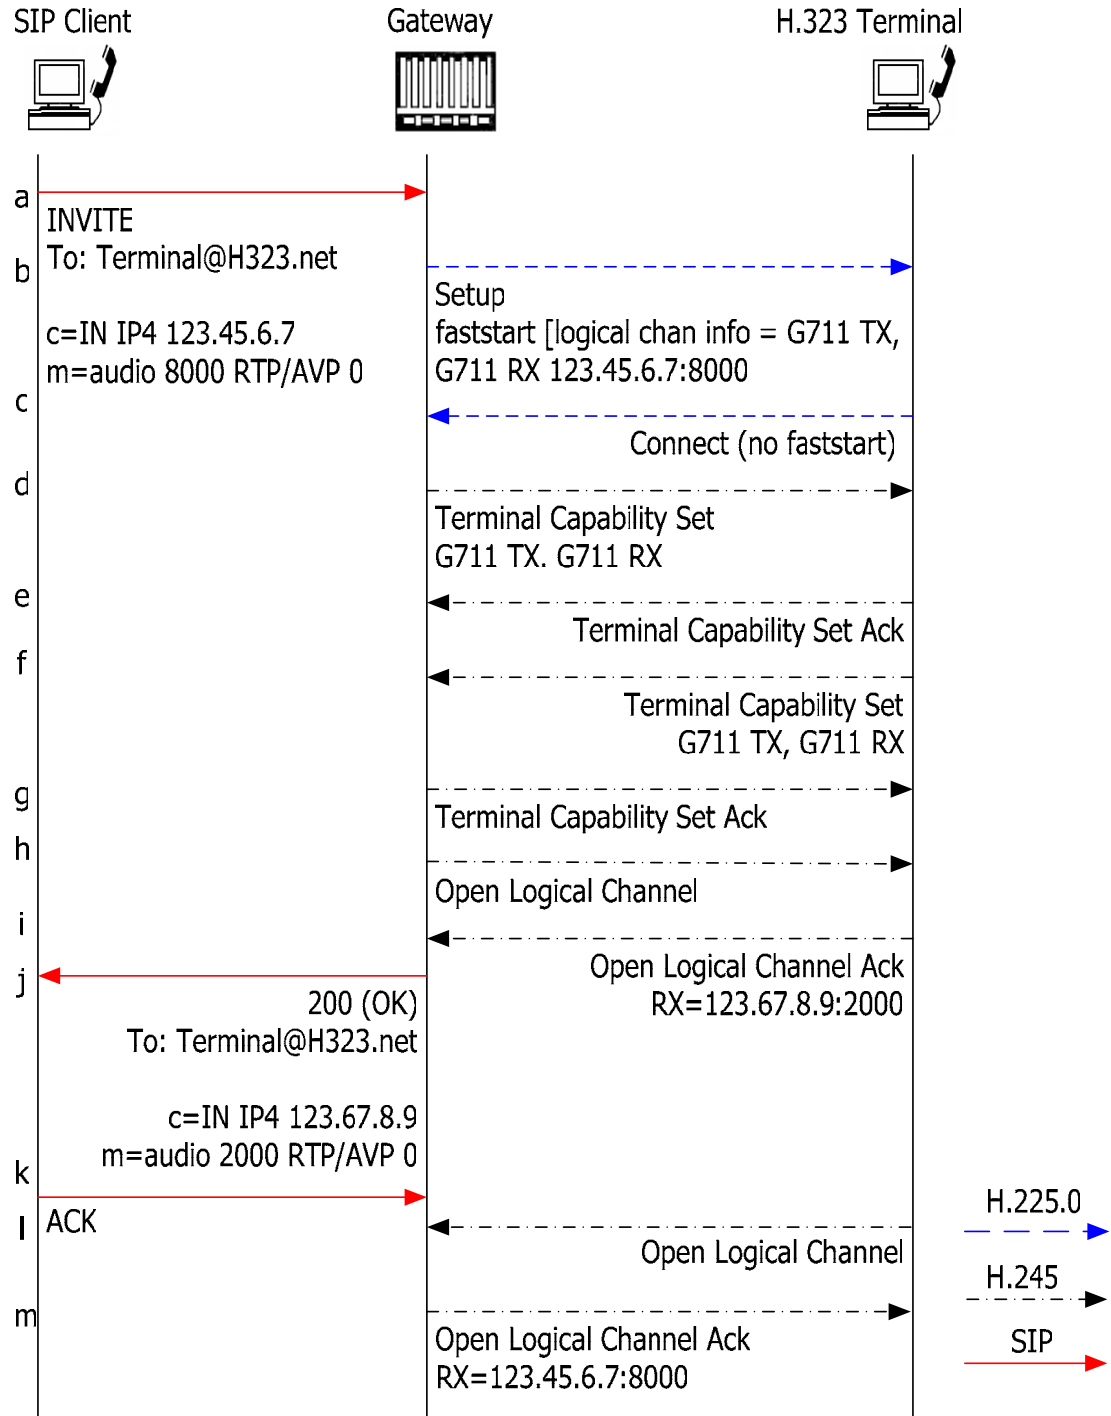

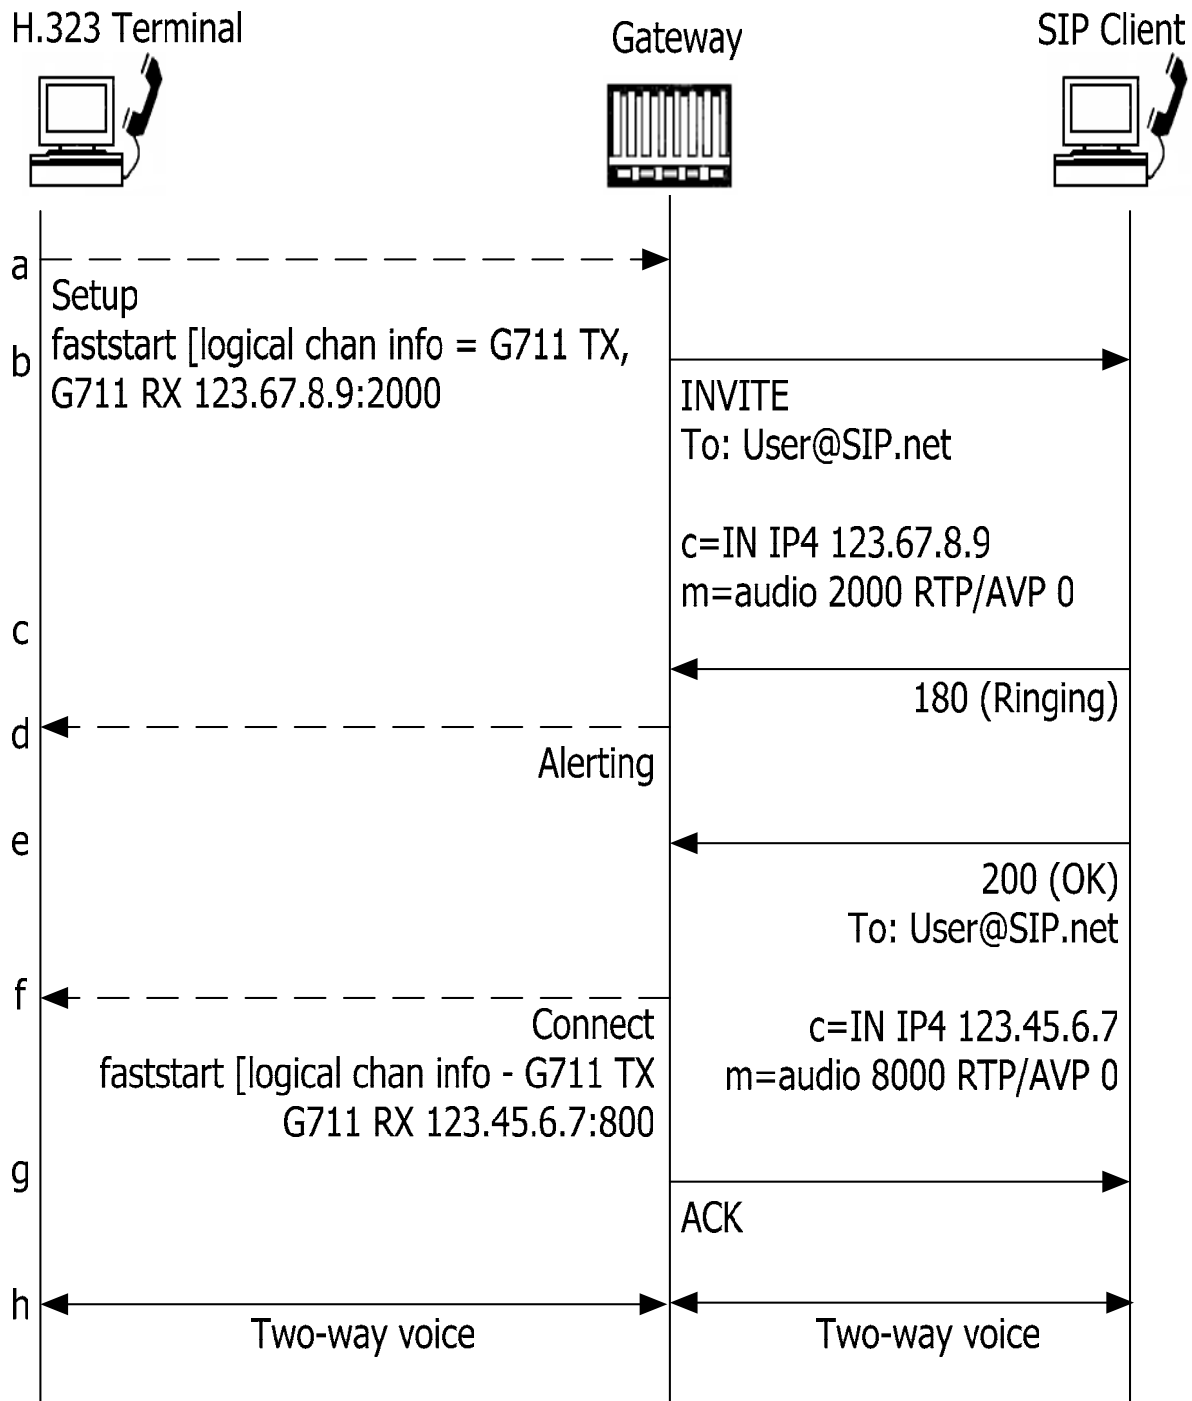



Summary

- The future for signaling in VoIP networks
 - Simple, yet flexible
 - Easier to implement
 - Fit well with the media gateway control protocols
 - Coexisting with PSTN
- SIP is the protocol of choice for the evolution of third-generation wireless networks.
 - SIP-based mobile devices will become available.
 - SIP-based network elements will be introduced within mobile networks.