

Applied Deep Learning

YUN-NUNG (VIVIAN) CHEN HTTP://ADL.MIULAB.TW






Review

Vanishing Gradient Problem


Recurrent Neural Network Definition

$$s_t = \sigma(W s_{t-1} + U x_t)$$
 $\sigma(\cdot)$: tanh, ReLU $o_t = \operatorname{softmax}(V s_t)$

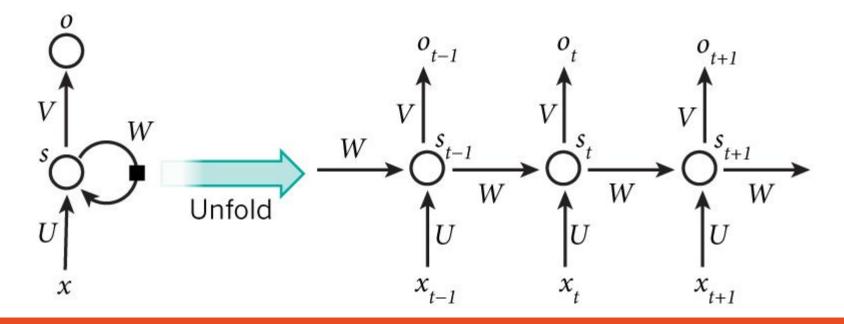

Vanishing Gradient: Gating Mechanism

RNN: keeps temporal sequence information

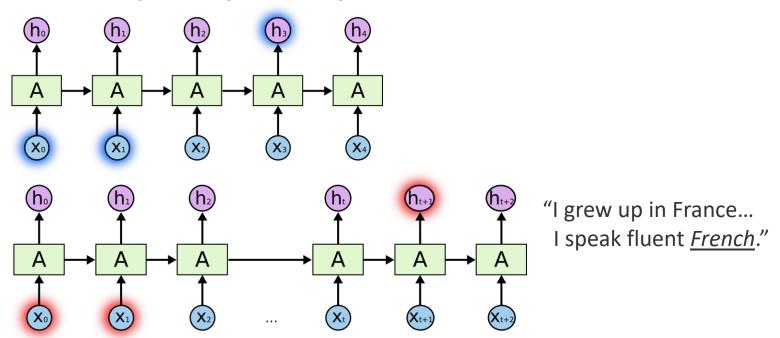



Issue: in theory, RNNs can handle such "long-term dependencies," but they cannot in practice → use gates to directly encode the long-distance information


Long Short-Term Memory


Addressing Vanishing Gradient Problem


LSTMs are explicitly designed to avoid the long-term dependency problem

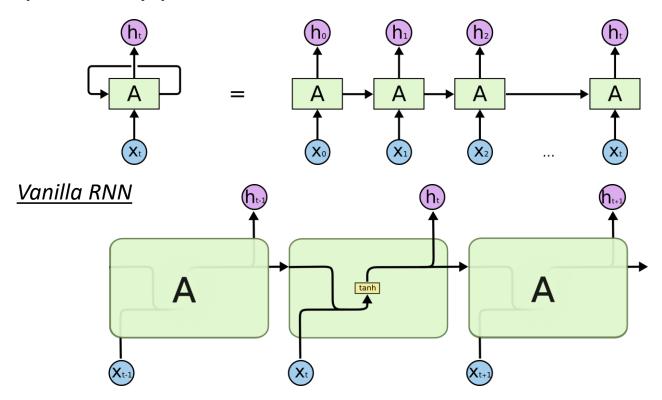

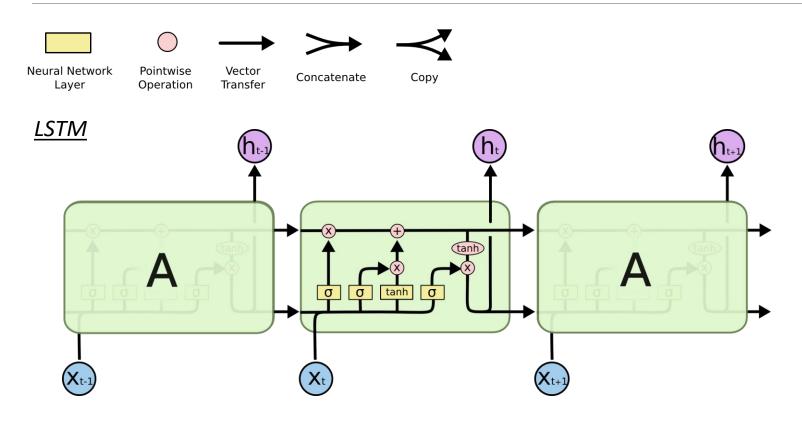


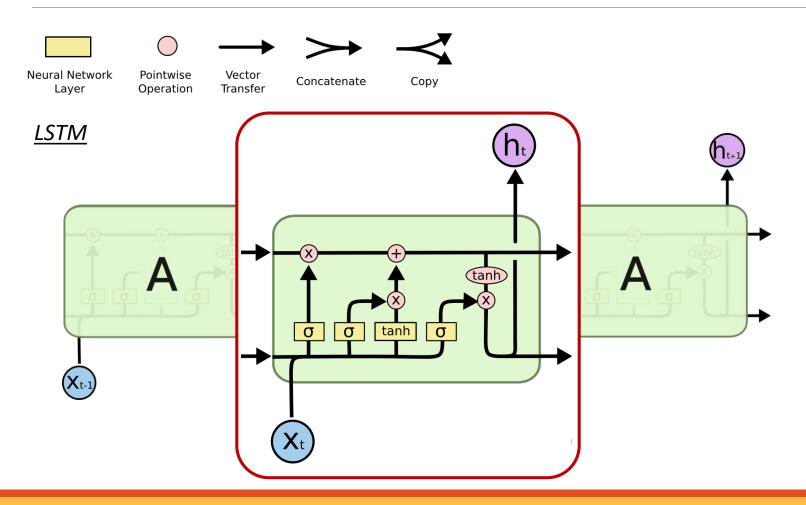


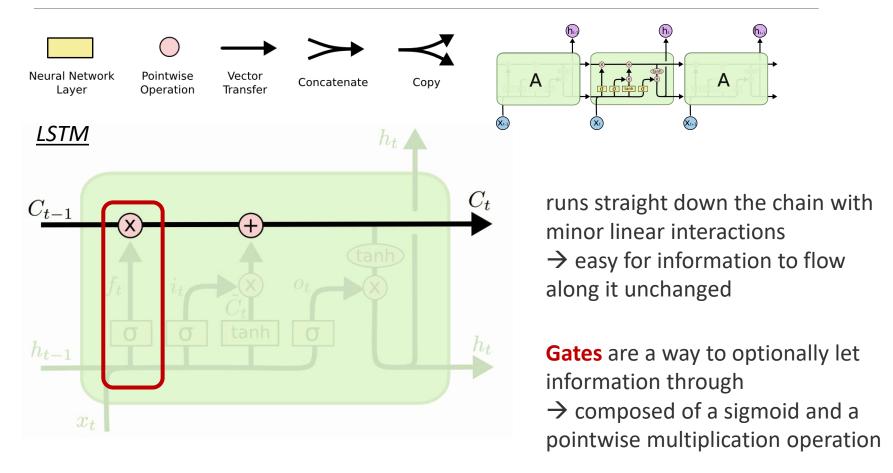

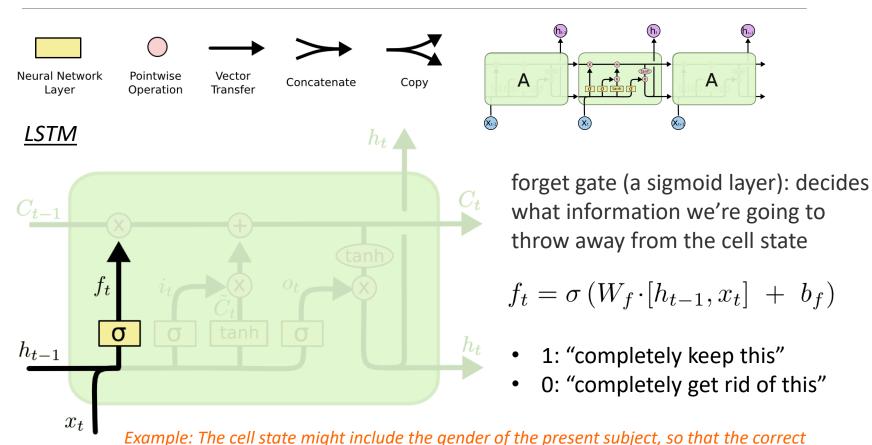

pronouns can be used. When seeing a new subject, we want to forget the old subject's gender.

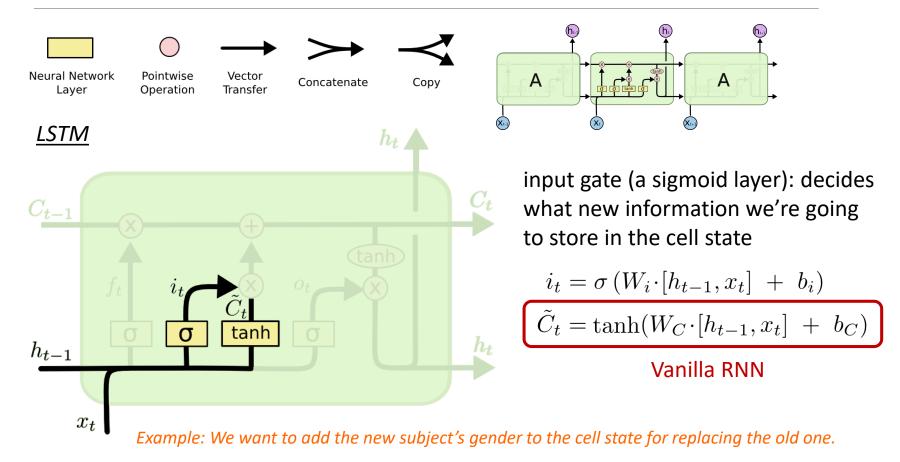

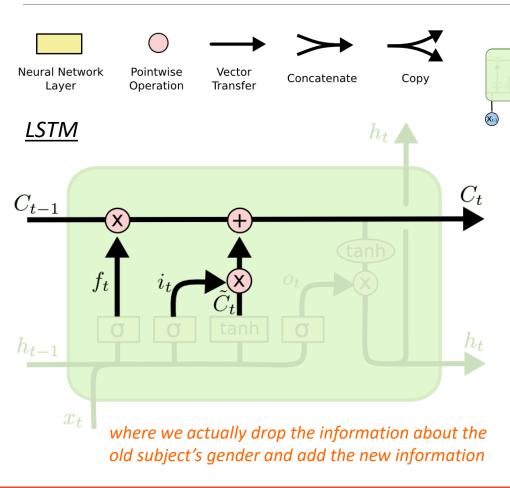


cell state update: forgets the things we decided to forget earlier and add the new candidate values, scaled by how much we decided to update each state value

Α

Α

$$C_t = f_t * C_{t-1} + i_t * \tilde{C}_t$$

- f_t : decides which to forget
- i_t : decide which to update

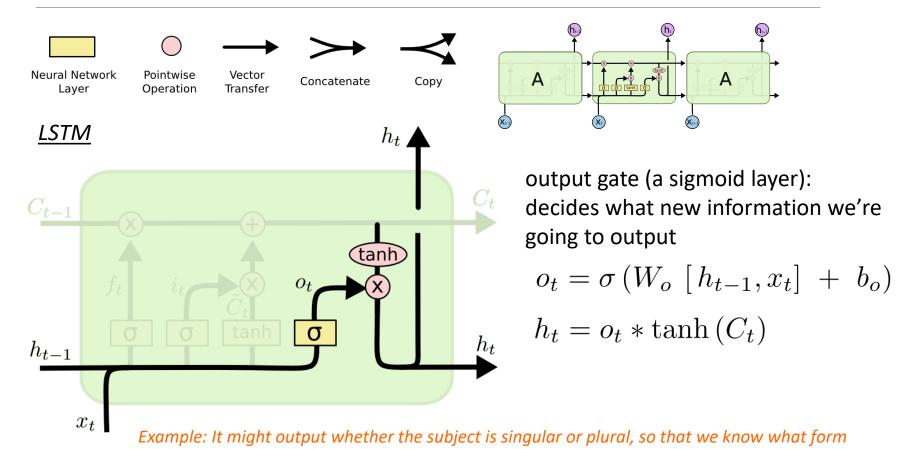


a verb should be conjugated into if that's what follows next.


Variants on LSTM

Addressing Vanishing Gradient Problem


LSTM with Peephole Connections

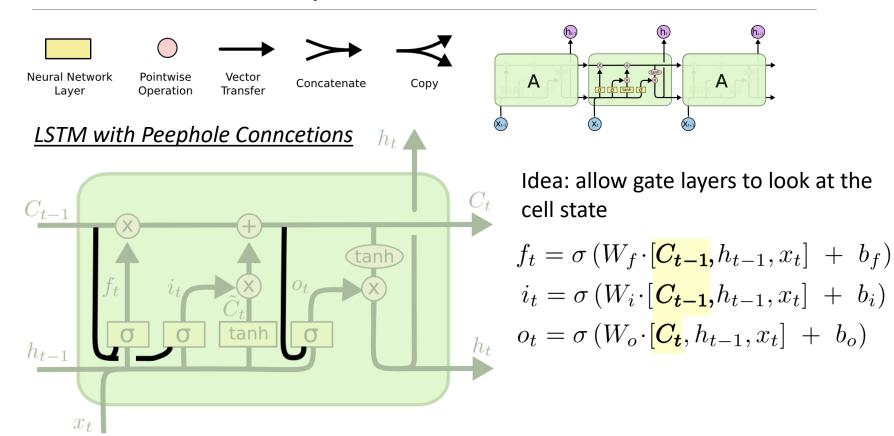

LSTM with Coupled Forget/Input Gates

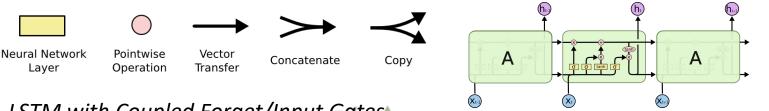

LSTM with Coupled Forget/Input Gates

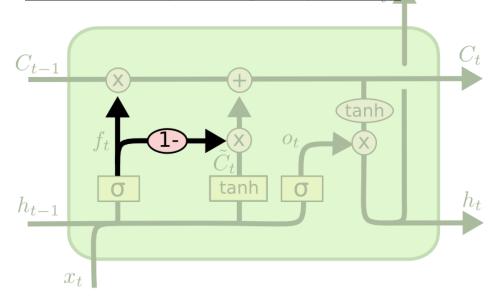

Idea: instead of separately deciding what to forget and what we should add new information to, we make those decisions together


$$C_t = f_t * C_{t-1} + (1 - f_t) * \tilde{C}_t$$

We only forget when we're going to input something in its place, and vice versa.

Gated Recurrent Unit

Addressing Vanishing Gradient Problem

Gated Recurrent Unit (GRU)

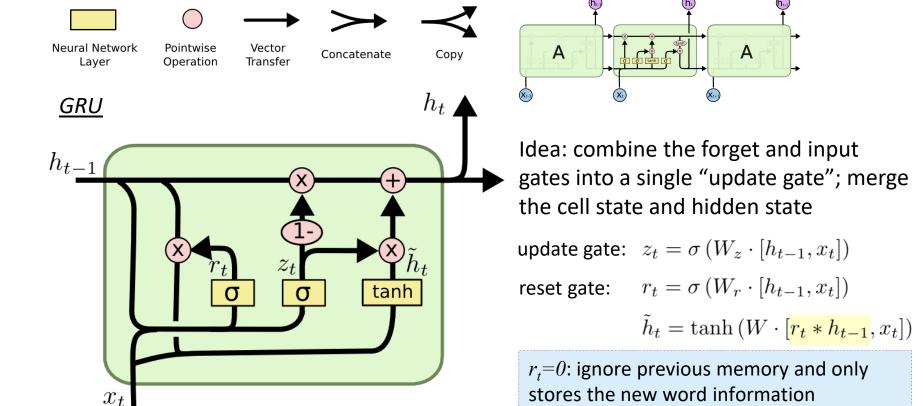

GRU is simpler and has less parameters than LSTM

 $h_t = (1 - z_t) * h_{t-1} + z_t * \tilde{h}_t$

Concluding Remarks

Gating mechanism for vanishing gradient problem

Gated RNN

- Peephole Connections
- Coupled Forget/Input Gates
- Gated Recurrent Unit (GRU)

