


	Announcements
	Do subscribe the mailing list
	 Check out scribes from past years
Cameras	
Digital Visual Effects	
Yung-Yu Chuang	
nith slides by Fredo Durand, Brian Curless, Steve Seitz and Alexei Efros	
Camera trial #1	Pinhole camera
	pinhole camera
scene film	scene barrier film
	Add a barrier to block off most of the rays.
Dut a piece of film in front of an abient	It reduces blurringThe pinhole is known as the aperture
Put a piece of film in front of an object.	The image is inverted

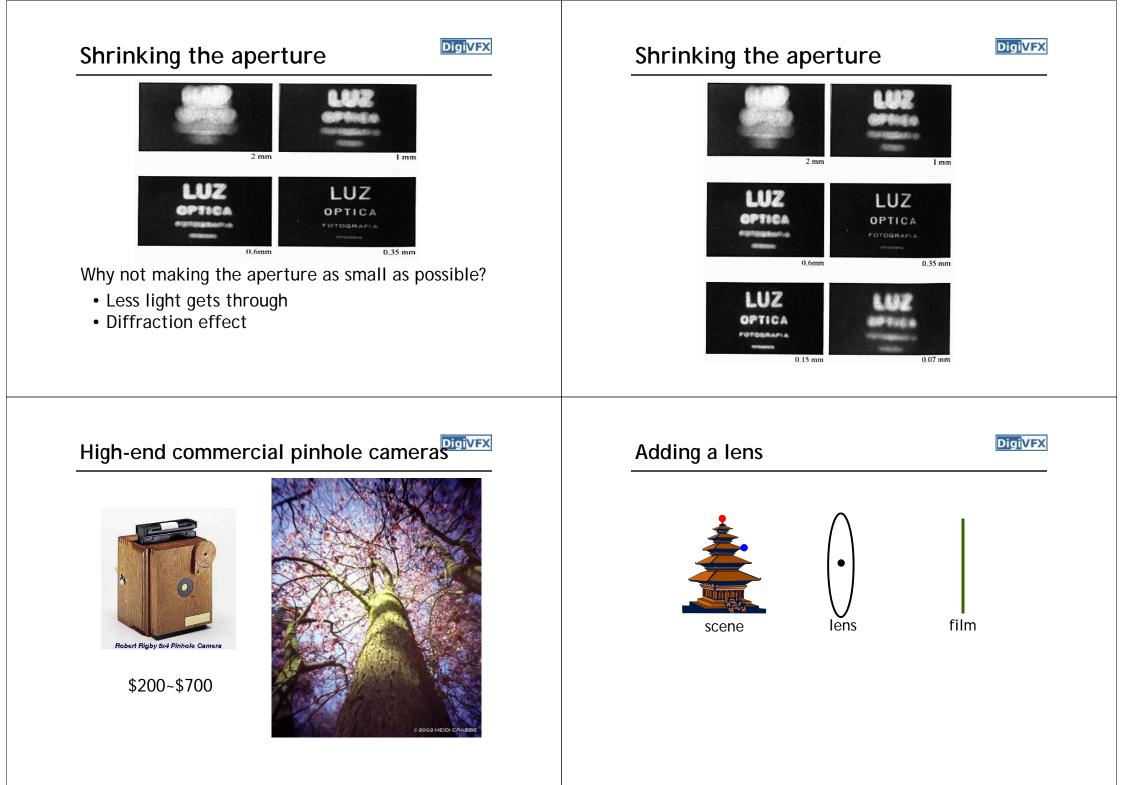

DigiVFX

Lenses






Thin lens formula


Similar triangles everywhere!

y'/y = D'/D

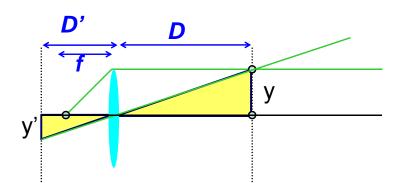


Frédo Durand's slide

DigiVFX

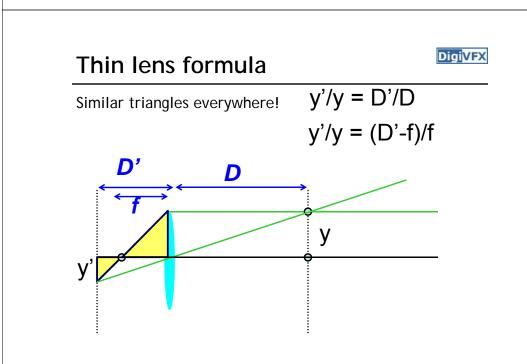


Thin lens formula

Digi<mark>VFX</mark>

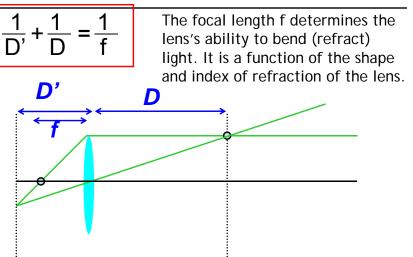

DigiVFX


Adding a lens



A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
- other points project to a "circle of confusion" in the image
- Thin lens applet: http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html

Zoom lens

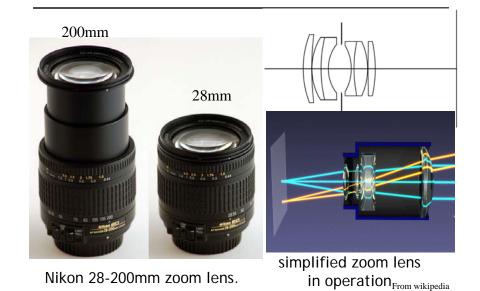

DigiVFX Field of view vs focal length SceneW. α Sensor _ Gaussian Lens Formula: $o^{-}\overline{f}$ i Field of View: $\alpha = 2 \arctan(w/(2i))$ \approx 2arctan(w/(2f))


Example: w = 30mm, f = 50mm => $\alpha \approx 33.4^{\circ}$

DigiVFX Focal length in practice 24mm 50 500 mm 135 mm 50 mm 46 50mm 24 mm 83° 135mm 7,5 mm 180°



DigiVFX

Distortion



- Radial distortion of the image
 - Caused by imperfect lenses
 - Deviations are most noticeable for rays that pass through the edge of the lens

Correcting radial distortion







Vignetting



Vignetting

 L_3 L_2 L_1










Slides from Li Zhang

Vignetting





more light from A than B !




Goldman & Chen ICCV 2005

DigiVFX

Chromatic Aberration



Lens has different refractive indices for different wavelengths.



http://www.dpreview.com/learn/?/Glossary/Optical/chromatic_aberration_0
1.htm


Special lens systems using two or more pieces of glass with different refractive indexes can reduce or eliminate this problem.

Slides from Li Zhang

DigiVFX

DigiVFX

Exposure = aperture + shutter speed



- Aperture of diameter D restricts the range of rays (aperture may be on either side of the lens)
- Shutter speed is the amount of time that light is allowed to pass through the aperture

Exposure

- Two main parameters:
 - Aperture (in f stop)






Medium aperture Stopped down

- Shutter speed (in fraction of a second)





Blade (closing) Blade (open) Focal plane (closed)

Focal plane (open)

Effects of shutter speeds



 Slower shutter speed => more light, but more motion blur Slow shutter, speed





• Faster shutter speed freezes motion

Walking people Running people

Car













1/250

1/500

1/1000


Aperture

- Aperture is the diameter of the lens opening, usually specified by f-stop, f/D, a fraction of the focal length.
 - f/2.0 on a 50mm means that the aperture is 25mm
 - f/2.0 on a 100mm means that the aperture is 50mm
- When a change in f-stop occurs, the light is either doubled or cut in half.
- Lower f-stop, more light (larger lens opening)
- Higher f-stop, less light (smaller lens opening)



Depth of field

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus





Depth of field

Digi<mark>VFX</mark>

DigiVFX

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus



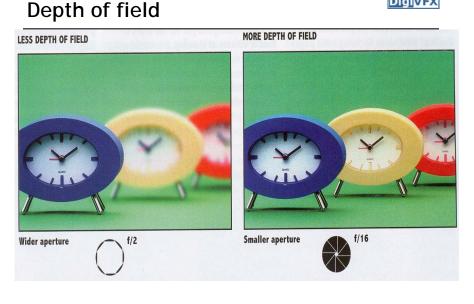

DigiVFX

Exposure

- Two main parameters:
 - Aperture (in f stop)
 - Shutter speed (in fraction of a second)
- Reciprocity

The same exposure is obtained with an exposure twice as long and an aperture *area* half as big

- Hence square root of two progression of f stops vs. power of two progression of shutter speed
- Reciprocity can fail for very long exposures



From Photography, London et al.

DigiVF)

Exposure & metering

- The camera metering system measures how bright the scene is
- In Aperture priority mode, the photographer sets the aperture, the camera sets the shutter speed
- In Shutter-speed priority mode, photographers sets the shutter speed and the camera deduces the aperture
- In Program mode, the camera decides both exposure and shutter speed (middle value more or less)
- In Manual mode, the user decides everything (but can get feedback)

Reciprocity

- · Assume we know how much light we need
- We have the choice of an infinity of shutter speed/aperture pairs
 Speed/aperture pairs



- What will guide our choice of a shutter speed?
 - Freeze motion vs. motion blur, camera shake
- What will guide our choice of an aperture?
 - Depth of field, diffraction limit
- Often we must compromise
 - Open more to enable faster speed (but shallow DoF)

Pros and cons of various modes



- Aperture priority
 - Direct depth of field control
 - Cons: can require impossible shutter speed (e.g. with f/1.4 for a bright scene)
- Shutter speed priority
 - Direct motion blur control
 - Cons: can require impossible aperture (e.g. when requesting a 1/1000 speed for a dark scene)
 Note that aperture is somewhat more restricted
- Program
 - Almost no control, but no need for neurons
- Manual
 - Full control, but takes more time and thinking






Sensitivity (ISO)

DigiVFX

- Third variable for exposure
- Linear effect (200 ISO needs half the light as 100 ISO)
- Film photography: trade sensitivity for grain





Digital photography: trade sensitivity for noise
 Nikon D2X
 ISO 200
 Nikon D2X
 ISO 200
 ISO



Demo

```
See http://www.photonhead.com/simcam/
```

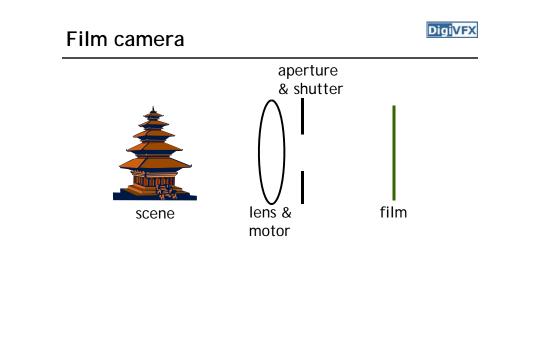

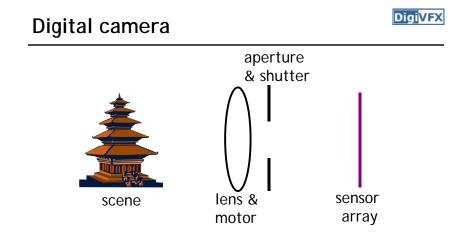


- A digital camera replaces film with a sensor array
- Each cell in the array is a light-sensitive diode that converts photons to electrons



CCD v.s. CMOS


Digi<mark>VFX</mark>

- CCD is less susceptible to noise (special process, higher fill factor)
- CMOS is more flexible, less expensive (standard process), less power consumption

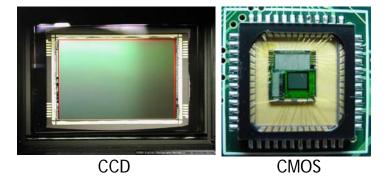

Sensor noise


- Blooming
- Diffusion
- Dark current
- Photon shot noise
- Amplifier readout noise




8V 0V

DigiVFX





lens



si Real world

Optics Recorder Digitizer


SLR (Single-Lens Reflex)

Digi<mark>VFX</mark>

- Reflex (R in SLR) means that we see through the same lens used to take the image.
- Not the case for compact cameras





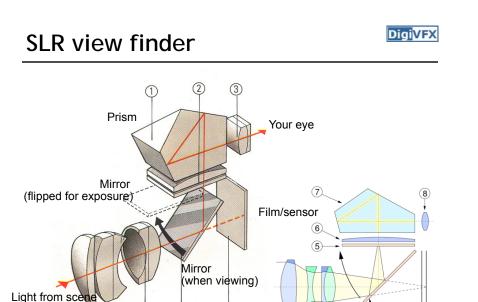

(1)

(2)


(3)


Color

DigiVFX

So far, we've only talked about monochrome sensors. Color imaging has been implemented in a number of ways:


- Field sequential
- Multi-chip
- Color filter array
- X3 sensor






Field sequential





Field sequential




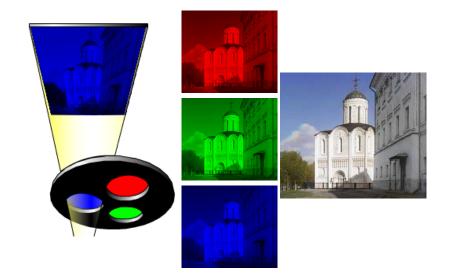



Prokudin-Gorskii (early 1900's)







http://www.loc.gov/exhibits/empire/

Prokudin-Gorskii (early 1990's)




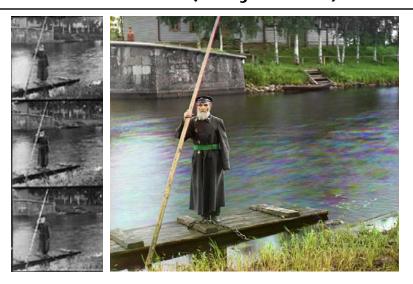

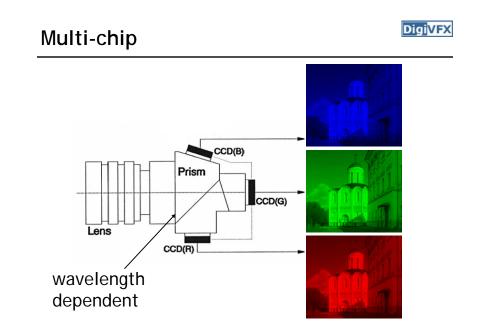

Embedded color filters







Color filters can be manufactured directly onto the photodetectors.

Color filter array

Digi<mark>VFX</mark>

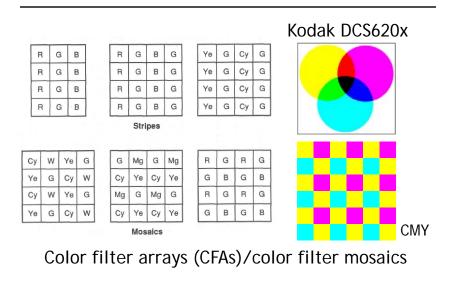

Why CMY CFA might be better

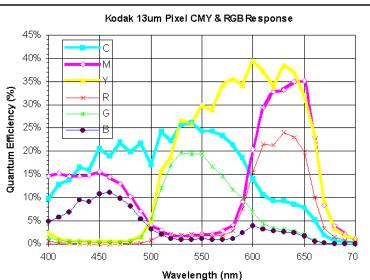

DigiVFX

navelengui (iiii


DigiVFX Color filter array RG в R G в G Ye G Су G R G B R G B G Ye G Cy G Ye R RGB G B G G Cy G Ye R G в R G В G G Cy. G Stripes G Mg G Mg R G R G Cy W Ye G Cy Ye Cy Ye Ye G Cy W GBG в Bayer pattern Mg G Mg G R G Cy W Ye G GR G Су в в Ye G Су Ye Cy G W Ye Mosaics

Color filter arrays (CFAs)/color filter mosaics



Demosaicking CFA's

DigiVFX

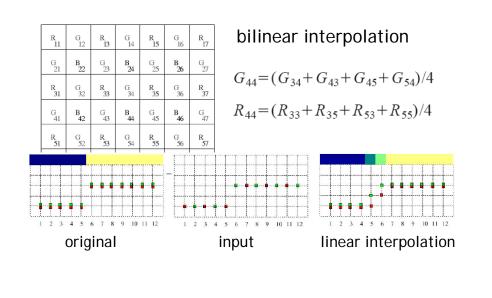

Demosaicking CFA's

R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	в	G	В	G	в	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	В	G	В	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57
G	B	G	B	G	В	G
61	62	63	64	65	66	67
R	G	R	G	R	G	R
71	72	73	74	75	76	77

Constant hue-based interpolation (Cok) Hue: (R/G, B/G)Interpolate G first $R_{44} = \mathbf{G}_{44} - \frac{R_{33}}{\mathbf{G}_{33}} + \frac{R_{35}}{\mathbf{G}_{35}} + \frac{R_{53}}{\mathbf{G}_{53}} + \frac{R_{55}}{\mathbf{G}_{55}} + \frac{R_{55}}{\mathbf{G}_{55}} + \frac{R_{53}}{\mathbf{G}_{55}} + \frac{R_{54}}{\mathbf{G}_{44}} + \frac{R_{44}}{\mathbf{G}_{44}} + \frac{R_{44}}{\mathbf{G}$

DigiVFX

R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	В	G	В	G	в	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	В	G	B	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57
G	B	G	B	G	В	G
61	62	63	64	65	66	67
R	G	R	G	R	G	R
71	72	73	74	75	76	77

Demosaicking CFA's


Median-based interpolation (Freeman)

- 1. Linear interpolation
- 2. Median filter on color differences

Demosaicking CFA's

Digi<mark>VFX</mark>



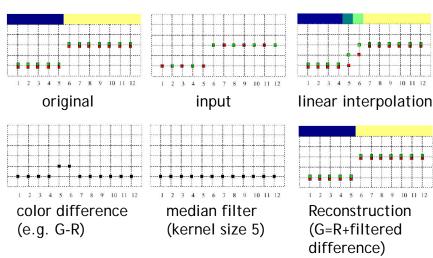





Demosaicking CFA's


DigiVFX


						_	
R 11	G 12	R 13	G 14	R 15	G 16	R 17	G
G 21	в 22	G 23	В 24	G 25	в 26	G 27	(L
R 31	G 32	R 33	G 34	R 35	G 36	R 37	1
G 41	B 42	G 43	В 44	G 45	B 46	G 47	a
R 51	G 52	R 53	G 54	R 55	G 56	R 57	ß
G 61	B 62	G 63	В 64	G 65	B 66	G 67	
R 71	G 72	R 73	G 74	R 75	G 76	R 77	G
					-		ંહ



Demosaicking CFA's

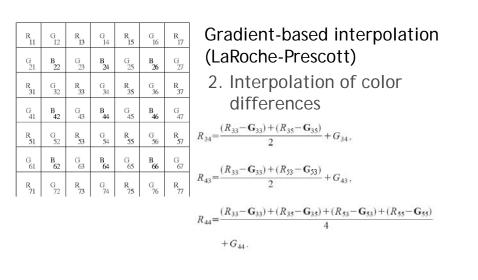

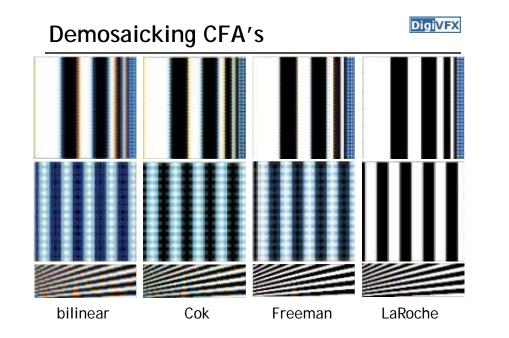

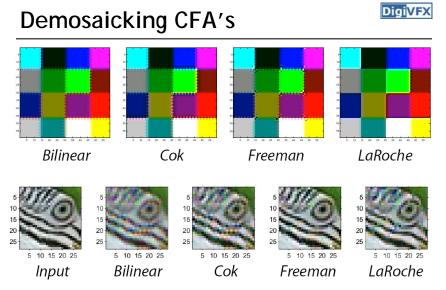

Generally, Freeman's is the best, especially for natural images.




Foveon X3 sensor


• light penetrates to different depths for different wavelengths


DigiVFX


multilayer CMOS sensor gets 3 different spectral sensitivities

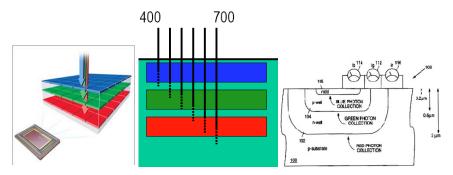

Color filter array

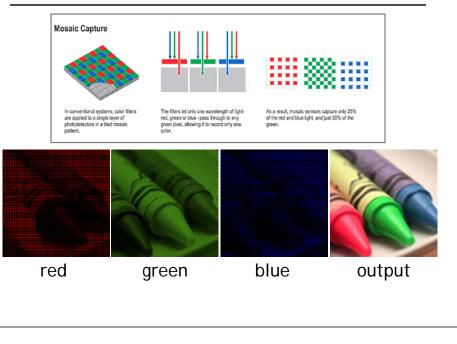

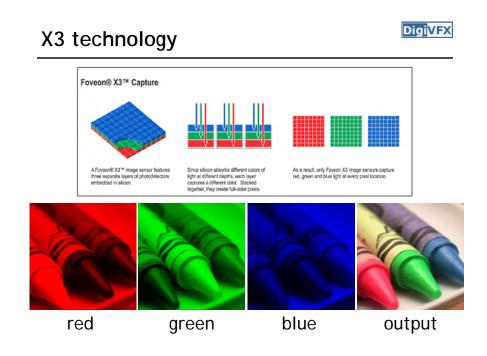

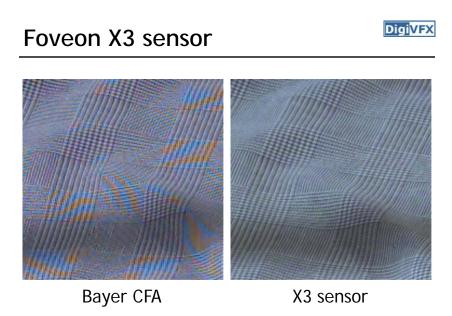



Cameras with X3

DigiVFX



Sigma SD10, SD9



Polaroid X530

Color processing



- After color values are recorded, more color processing usually happens:
 - White balance
 - Non-linearity to approximate film response or match TV monitor gamma

Sigma SD9 vs Canon D30



White Balance

Digi<mark>VFX</mark>






warmer +3

automatic white balance



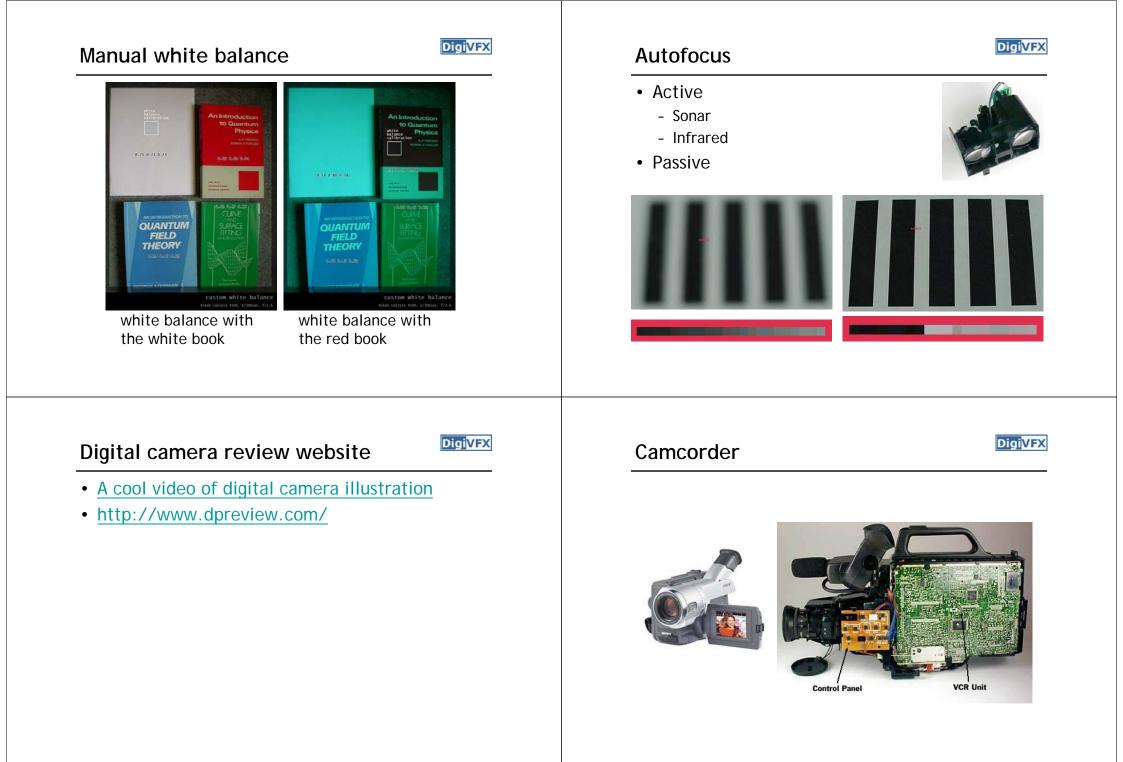

Interlacing


DigiVFX



without interlacing

with interlacing

Deinterlacing

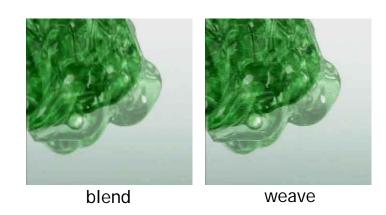

Deinterlacing


Digi<mark>VFX</mark>



Discard (even field only or odd filed only)



Progressive scan









<section-header><section-header>

References

- http://www.howstuffworks.com/digital-camera.htm
- <u>http://electronics.howstuffworks.com/autofocus.htm</u>
- Ramanath, Snyder, Bilbro, and Sander. <u>Demosaicking</u> <u>Methods for Bayer Color Arrays</u>, Journal of Electronic Imaging, 11(3), pp306-315.
- Rajeev Ramanath, Wesley E. Snyder, Youngjun Yoo, Mark S. Drew, <u>Color Image Processing Pipeline in Digital</u> <u>Still Cameras</u>, IEEE Signal Processing Magazine Special Issue on Color Image Processing, vol. 22, no. 1, pp. 34-43, 2005.
- <u>http://www.worldatwar.org/photos/whitebalance/ind</u>
 <u>ex.mhtml</u>
- http://www.100fps.com/

