Camera trial #1




Cameras

Digital Visual Effects

Yung-Yu Chuang


with slides by Fredo Durand, Brian Curless, Steve Seitz and Alexei Efros



Put a piece of film in front of an object.

Pinhole camera






Add a barrier to block off most of the rays.

- It reduces blurring
- The pinhole is known as the aperture
- The image is inverted

Shrinking the aperture






Why not making the aperture as small as possible?

- Less light gets through
- Diffraction effect

Shrinking the aperture





High-end commercial pinhole cameras DigiVFX








DigiVFX

Adding a lens










Lenses

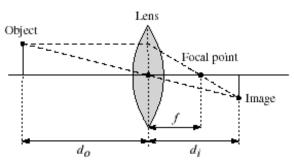


Thin lens equation:
$$\frac{1}{d_o} + \frac{1}{d_i} = \frac{1}{f}$$

Thin lens formula



Similar triangles everywhere!

$$y'/y = D'/D$$

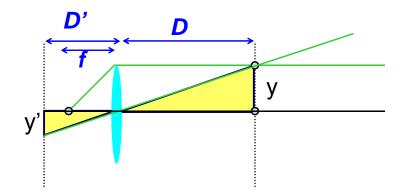

Frédo Durand's slide


Thin lens formula



Similar triangles everywhere!

$$y'/y = D'/D$$


$$y'/y = (D'-f)/f$$

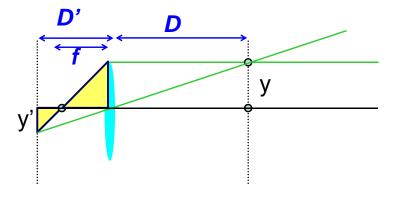


Frédo Durand's slide

Thin lens formula






The focal length f determines the lens's ability to bend (refract) light. It is a function of the shape and index of refraction of the lens.

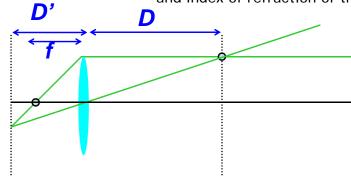

Adding a lens






A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
- other points project to a "circle of confusion" in the image
- Thin lens applet: http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html


Zoom lens



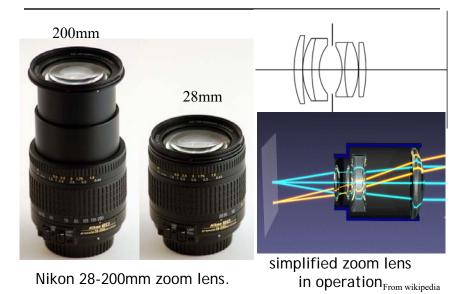

Field of view vs focal length



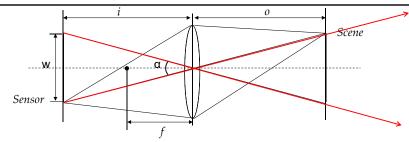

Gaussian Lens Formula:

$$\frac{1}{i} + \frac{1}{o} = \frac{1}{f}$$

Field of View:

 $\alpha = 2 \arctan(w/(2i))$


≈ 2arctan(w/(2f))


Example: w = 30mm, $f = 50mm => \alpha \approx 33.4^{\circ}$

Slides from Li Zhang

DigiVFX

Focal length in practice










Distortion



- Radial distortion of the image
 - Caused by imperfect lenses
 - Deviations are most noticeable for rays that pass through the edge of the lens

Correcting radial distortion










from Helmut Dersch

Vignetting












Slides from Li Zhang

DigiVFX

Vignetting









original corrected


Goldman & Chen ICCV 2005

Slides from Li Zhang

Chromatic Aberration



Lens has different refractive indices for different wavelengths.






http://www.dpreview.com/learn/?/Glossary/Optical/chromatic_aberration_0

Special lens systems using two or more pieces of glass with different refractive indexes can reduce or eliminate this problem.

Slides from Li Zhang

Exposure = aperture + shutter speed





- Aperture of diameter D restricts the range of rays (aperture may be on either side of the lens)
- Shutter speed is the amount of time that light is allowed to pass through the aperture

Exposure



- Two main parameters:
 - Aperture (in f stop)







Full aperture


Medium aperture


Stopped down

- Shutter speed (in fraction of a second)










Blade (closing) Blade (open) Focal plane (closed)

Focal plane (open)

Effects of shutter speeds



• Slower shutter speed => more light, but more motion blur





Faster shutter speed freezes motion

From Photography, London et al.

Walking people

Running people

Car

Fast train










1/125 1/250 1/500 1/1000

Aperture

- Aperture is the diameter of the lens opening, usually specified by f-stop, f/D, a fraction of the focal length.
 - f/2.0 on a 50mm means that the aperture is 25mm
 - f/2.0 on a 100mm means that the aperture is 50mm
- When a change in f-stop occurs, the light is either doubled or cut in half.
- Lower f-stop, more light (larger lens opening)
- Higher f-stop, less light (smaller lens opening)






Depth of field

DigiVFX


Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus

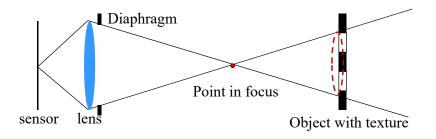

Depth of field




Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus



Depth of field



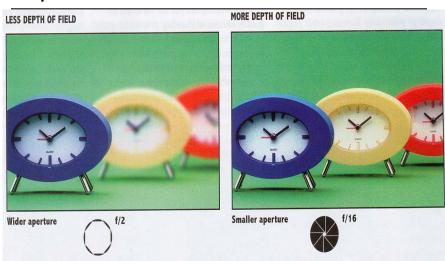


Exposure

- Two main parameters:
 - Aperture (in f stop)
 - Shutter speed (in fraction of a second)
- Reciprocity

The same exposure is obtained with an exposure twice as long and an aperture *area* half as big

- Hence square root of two progression of f stops vs. power of two progression of shutter speed
- Reciprocity can fail for very long exposures



Reciprocity



- Assume we know how much light we need
- We have the choice of an infinity of shutter speed/aperture pairs



- What will guide our choice of a shutter speed?
 - Freeze motion vs. motion blur, camera shake
- What will guide our choice of an aperture?
 - Depth of field, diffraction limit
- Often we must compromise
 - Open more to enable faster speed (but shallow DoF)

DigiVFX

Pros and cons of various modes

- Aperture priority
 - Direct depth of field control
 - Cons: can require impossible shutter speed (e.g. with f/1.4 for a bright scene)
- Shutter speed priority
 - Direct motion blur control
 - Cons: can require impossible aperture (e.g. when requesting a 1/1000 speed for a dark scene)
 - Note that aperture is somewhat more restricted
- Program
 - Almost no control, but no need for neurons
- Manual
 - Full control, but takes more time and thinking

Exposure & metering



- The camera metering system measures how bright the scene is
- In Aperture priority mode, the photographer sets the aperture, the camera sets the shutter speed
- In Shutter-speed priority mode, photographers sets the shutter speed and the camera deduces the aperture
- In Program mode, the camera decides both exposure and shutter speed (middle value more or less)
- In Manual mode, the user decides everything (but can get feedback)

Sensitivity (ISO)



- Third variable for exposure
- Linear effect (200 ISO needs half the light as 100 ISO)
- Film photography: trade sensitivity for grain










Digital photography: trade sensitivity for noise



Summary in a picture



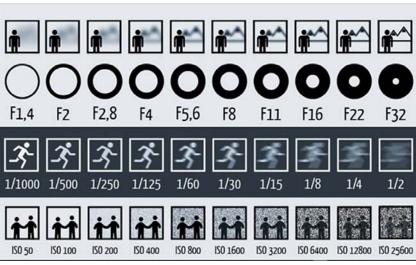


source hamburgerfotospots.de

Film camera








Digital camera









- A digital camera replaces film with a sensor array
- Each cell in the array is a light-sensitive diode that converts photons to electrons

CCD v.s. CMOS



- CCD is less susceptible to noise (special process, higher fill factor)
- CMOS is more flexible, less expensive (standard process), less power consumption








Sensor noise



- Blooming
- Diffusion
- Dark current
- Photon shot noise
- Amplifier readout noise







SLR (Single-Lens Reflex)




- Reflex (R in SLR) means that we see through the same lens used to take the image.
- Not the case for compact cameras





SLR view finder



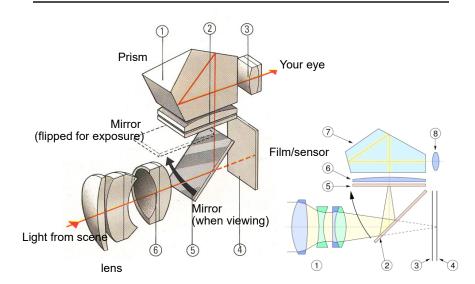

Color



So far, we've only talked about monochrome sensors. Color imaging has been implemented in a number of ways:


- Field sequential
- Multi-chip
- · Color filter array
- X3 sensor


Field sequential



Field sequential








Field sequential





Prokudin-Gorskii (early 1900's)






http://www.loc.gov/exhibits/empire/


Prokudin-Gorskii (early 1900's)



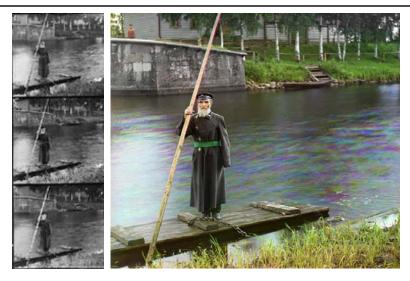


Multi-chip



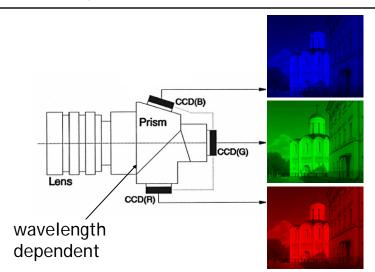

Embedded color filters






Color filters can be manufactured directly onto the photodetectors.

Color filter array




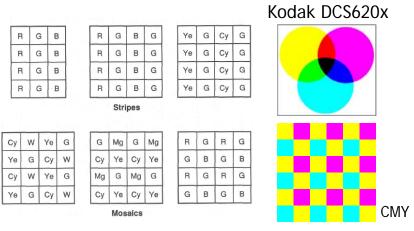

Color filter arrays (CFAs)/color filter mosaics


Why CMY CFA might be better



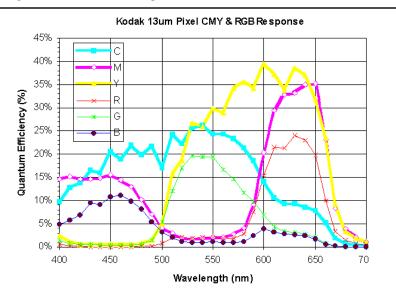

Color filter array




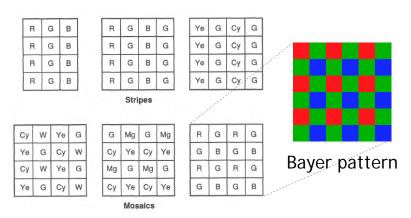

Color filter arrays (CFAs)/color filter mosaics

Bayer's pattern



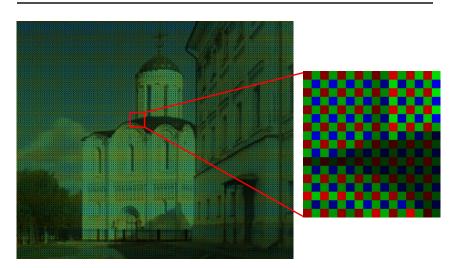

Demosaicking CFA's




R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	B	G	B	G	B	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	B	G	B	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57

bilinear interpolation

$$G_{44} = (G_{34} + G_{43} + G_{45} + G_{54})/4$$

$$R_{44} = (R_{33} + R_{35} + R_{53} + R_{55})/4$$



Demosaicking CFA's



Demosaicking CFA's



R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	B	G	B	G	B	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	B	G	B	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57
G	B	G	B	G	B	G
61	62	63	64	65	66	67
R	G	R	G	R	G	R
71	72	73	74	75	76	77

Constant hue-based interpolation (Cok)

Hue: (R/G, B/G)Interpolate G first

$$R_{44} = \mathbf{G}_{44} \frac{R_{33}}{\mathbf{G}_{33}} + \frac{R_{35}}{\mathbf{G}_{35}} + \frac{R_{53}}{\mathbf{G}_{53}} + \frac{R_{55}}{\mathbf{G}_{55}}$$

$$B_{33} = \mathbf{G}_{33} + \frac{B_{22}}{\mathbf{G}_{22}} + \frac{B_{24}}{\mathbf{G}_{24}} + \frac{B_{42}}{\mathbf{G}_{42}} + \frac{B_{44}}{\mathbf{G}_{44}}$$


Median-based interpolation (Freeman)

- 1. Linear interpolation
- 2. Median filter on color differences

Demosaicking CFA's



Median-based interpolation (Freeman)

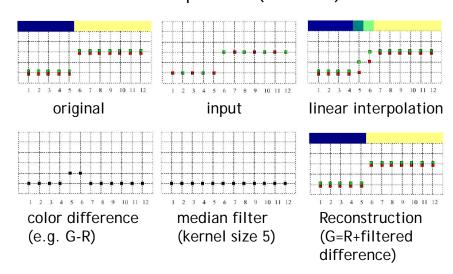

Demosaicking CFA's



R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	B	G	B	G	B	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	B	G	B	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57
G	B	G	B	G	B	G
61	62	63	64	65	66	67
R	G	R	G	R	G	R
71	72	73	74	75	76	77

Gradient-based interpolation (LaRoche-Prescott)

1. Interpolation on G

$$\alpha = abs[(B_{42} + B_{46})/2 - B_{44}]$$

 $\beta = abs[(B_{24} + B_{64})/2 - B_{44}]$

$$\mathbf{G}_{44} = \begin{cases} \frac{G_{43} + G_{45}}{2} & \text{if } \alpha < \beta \\ \frac{G_{34} + G_{54}}{2} & \text{if } \alpha > \beta. \\ \frac{G_{43} + G_{45} + G_{34} + G_{54}}{4} & \text{if } \alpha = \beta \end{cases}$$

Demosaicking CFA's



R	G	R	G	R	G	R
11	12	13	14	15	16	17
G	B	G	B	G	B	G
21	22	23	24	25	26	27
R	G	R	G	R	G	R
31	32	33	34	35	36	37
G	B	G	B	G	B	G
41	42	43	44	45	46	47
R	G	R	G	R	G	R
51	52	53	54	55	56	57
G	B	G	B	G	B	G
61	62	63	64	65	66	67
R	G	R	G	R	G	R
71	72	73	74	75	76	77


Gradient-based interpolation (LaRoche-Prescott)

2. Interpolation of color differences

$$R_{34} \! = \! \frac{(R_{33} \! - \! \mathbf{G}_{33}) + (R_{35} \! - \! \mathbf{G}_{35})}{2} + G_{34} \, ,$$

$$R_{43} \! = \! \frac{(R_{33} \! - \! \mathbf{G}_{33}) + (R_{53} \! - \! \mathbf{G}_{53})}{2} + G_{43} \, ,$$

$$R_{44} = \frac{(R_{33} - \mathbf{G}_{33}) + (R_{35} - \mathbf{G}_{35}) + (R_{53} - \mathbf{G}_{53}) + (R_{55} - \mathbf{G}_{55})}{4} + G_{44}.$$

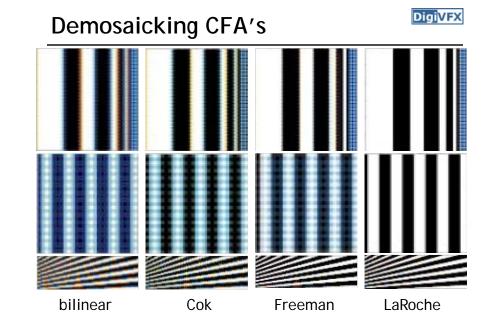


Demosaicking CFA's Silinear Cok Freeman LaRoche Silinear Cok Freeman LaRoche Cok Freeman LaRoche

Generally, Freeman's is the best, especially for natural images.

Foveon X3 sensor





- light penetrates to different depths for different wavelengths
- multilayer CMOS sensor gets 3 different spectral sensitivities

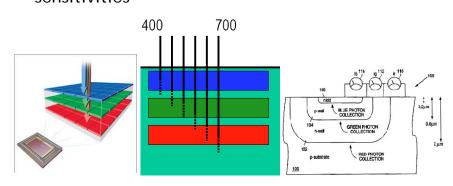

Color filter array









X3 technology



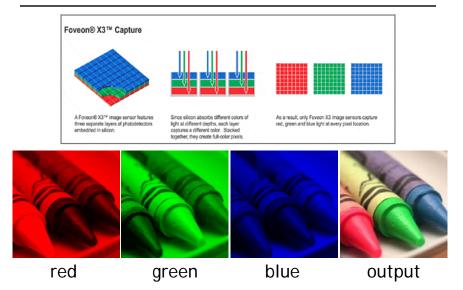

Foveon X3 sensor



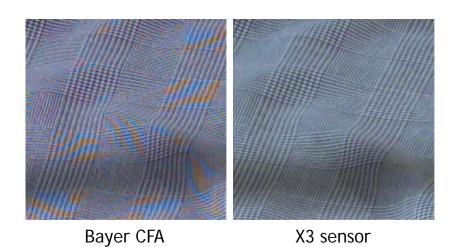

Cameras with X3







Sigma SD10, SD9

Polaroid X530

Sigma SD9 vs Canon D30





Color processing



DigiVFX

- After color values are recorded, more color processing usually happens:
 - White balance
 - Non-linearity to approximate film response or match TV monitor gamma

White Balance








warmer +3

automatic white balance

White Balance

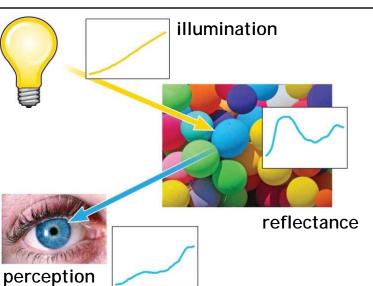


Color constancy

DigiVFX

What color is the dress?





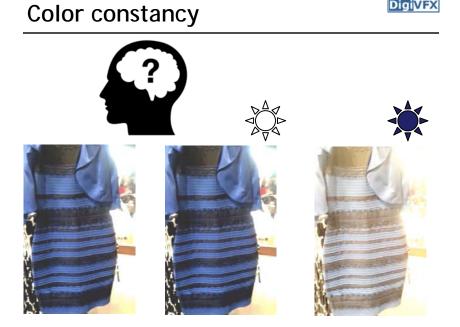

Human vision is complex







Color perception depends on surrounding



Color perception depends on surrounding

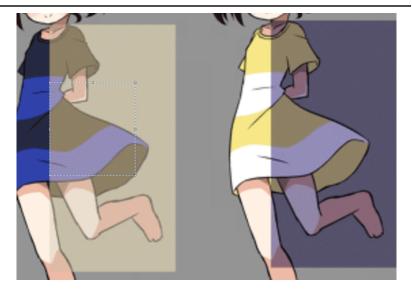

Color perception depends on surrounding

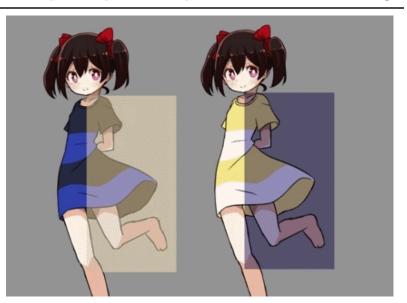

Autofocus

- Active
 - Sonar
 - Infrared
- Passive







DigiVFX

Digital camera review website



- A cool video of digital camera illustration
- http://www.dpreview.com/

Camcorder



Interlacing



DigiVFX










without interlacing

with interlacing

Deinterlacing






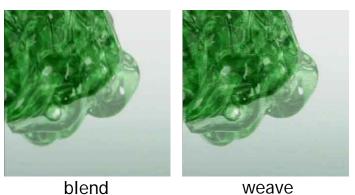

Deinterlacing







Progressive scan

Hard cases













More emerging cameras











References



- http://www.howstuffworks.com/digital-camera.htm
- http://electronics.howstuffworks.com/autofocus.htm
- Ramanath, Snyder, Bilbro, and Sander. <u>Demosaicking</u>
 <u>Methods for Bayer Color Arrays</u>, Journal of Electronic
 Imaging, 11(3), pp306-315.
- Rajeev Ramanath, Wesley E. Snyder, Youngjun Yoo, Mark S. Drew, <u>Color Image Processing Pipeline in Digital</u> <u>Still Cameras</u>, IEEE Signal Processing Magazine Special Issue on Color Image Processing, vol. 22, no. 1, pp. 34-43, 2005.
- http://www.worldatwar.org/photos/whitebalance/index.mhtml
- http://www.100fps.com/