


## Chapter 5 Link Layer and LANs



*Computer Networking:  
A Top Down Approach*  
4<sup>th</sup> edition.  
Jim Kurose, Keith Ross  
Addison-Wesley, July  
2007.

5: DataLink Layer 5-1

## Chapter 5: The Data Link Layer

### Our goals:

- understand principles behind data link layer services:
  - error detection, correction
  - sharing a broadcast channel: multiple access
  - link layer addressing
  - reliable data transfer, flow control: *done!*
- instantiation and implementation of various link layer technologies

5: DataLink Layer 5-2

## Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- **5.3 Multiple access protocols**
- 5.4 Link-layer Addressing
- 5.5 Ethernet
- 5.6 Link-layer switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM, MPLS

5: DataLink Layer 5-3

## Multiple Access Links and Protocols

### Two types of "links":

- point-to-point
  - PPP for dial-up access
  - point-to-point link between Ethernet switch and host
- **broadcast** (shared wire or medium)
  - old-fashioned Ethernet
  - upstream HFC
  - 802.11 wireless LAN



shared wire (e.g.,  
cabled Ethernet)



shared RF  
(e.g., 802.11 WiFi)



shared RF  
(satellite)



humans at a  
cocktail party  
(shared air, acoustical)

5: DataLink Layer 5-4

## Multiple Access protocols

- ❑ single shared broadcast channel
- ❑ two or more simultaneous transmissions by nodes: interference
  - collision if node receives two or more signals at the same time
- multiple access protocol
- ❑ distributed algorithm that determines how nodes share channel, i.e., determine when node can transmit
- ❑ communication about channel sharing must use channel itself!
  - no out-of-band channel for coordination

5: DataLink Layer 5-5

## Ideal Multiple Access Protocol

### Broadcast channel of rate R bps

1. when one node wants to transmit, it can send at rate R.
2. when M nodes want to transmit, each can send at average rate R/M
3. fully decentralized:
  - no special node to coordinate transmissions
  - no synchronization of clocks, slots
4. simple

5: DataLink Layer 5-6

## MAC Protocols: a taxonomy

Three broad classes:


- ❑ **Channel Partitioning**
  - divide channel into smaller "pieces" (time slots, frequency, code)
  - allocate piece to node for exclusive use
- ❑ **Random Access**
  - channel not divided, allow collisions
  - "recover" from collisions
- ❑ **"Taking turns"**
  - nodes take turns, but nodes with more to send can take longer turns

5: DataLink Layer 5-7

## Channel Partitioning MAC protocols: TDMA

### **TDMA: time division multiple access**

- ❑ access to channel in "rounds"
- ❑ each station gets fixed length slot (length = pkt trans time) in each round
- ❑ unused slots go idle
- ❑ example: 6-station LAN, 1,3,4 have pkt, slots 2,5,6 idle




5: DataLink Layer 5-8

## Channel Partitioning MAC protocols: FDMA

### FDMA: frequency division multiple access

- channel spectrum divided into frequency bands
- each station assigned fixed frequency band
- unused transmission time in frequency bands go idle
- example: 6-station LAN, 1,3,4 have pkt, frequency bands 2,5,6 idle

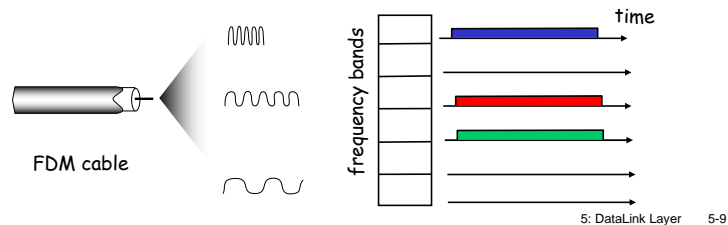

5: DataLink Layer 5-9

## Random Access Protocols

- When node has packet to send
  - transmit at full channel data rate R.
  - no *a priori* coordination among nodes
- two or more transmitting nodes → "collision",
- random access MAC protocol specifies:
  - how to detect collisions
  - how to recover from collisions (e.g., via delayed retransmissions)
- Examples of random access MAC protocols:
  - slotted ALOHA
  - ALOHA
  - CSMA, CSMA/CD, CSMA/CA

5: DataLink Layer 5-10

## Slotted ALOHA

### Assumptions:


- all frames same size
- time divided into equal size slots (time to transmit 1 frame)
- nodes start to transmit only slot beginning
- nodes are synchronized
- if 2 or more nodes transmit in slot, all nodes detect collision

### Operation:

- when node obtains fresh frame, transmits in next slot
  - if no collision: node can send new frame in next slot
  - if collision: node retransmits frame in each subsequent slot with prob. p until success

5: DataLink Layer 5-11

## Slotted ALOHA

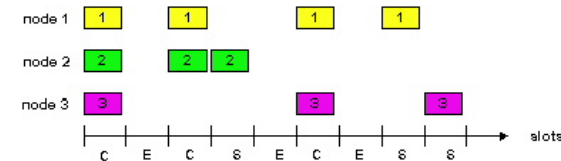

### Pros

- single active node can continuously transmit at full rate of channel
- highly decentralized: only slots in nodes need to be in sync
- simple

### Cons

- collisions, wasting slots
- idle slots
- nodes may be able to detect collision in less than time to transmit packet
- clock synchronization

5: DataLink Layer 5-12

## Slotted Aloha efficiency

**Efficiency**: long-run fraction of successful slots (many nodes, all with many frames to send)

- *suppose*: N nodes with many frames to send, each transmits in slot with probability  $p$
- prob that given node has success in a slot =  $p(1-p)^{N-1}$
- prob that *any* node has a success =  $Np(1-p)^{N-1}$

- max efficiency: find  $p^*$  that maximizes  $Np(1-p)^{N-1}$
- for many nodes, take limit of  $Np^*(1-p^*)^{N-1}$  as N goes to infinity, gives:


Max efficiency =  $1/e = .37$

**At best:** channel used for useful transmissions 37% of time!

5: DataLink Layer 5-13

## Pure (unslotted) ALOHA

- unslotted Aloha: simpler, no synchronization
- when frame first arrives
  - transmit immediately
- collision probability increases:
  - frame sent at  $t_0$  collides with other frames sent in  $[t_0-1, t_0+1]$

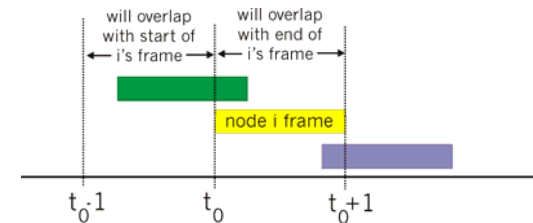

5: DataLink Layer 5-14

## Pure Aloha efficiency

$P(\text{success by given node}) = P(\text{node transmits}) \cdot$

$$\begin{aligned} & P(\text{no other node transmits in } [t_0-1, t_0]) \cdot \\ & P(\text{no other node transmits in } [t_0, t_0+1]) \\ & = p \cdot (1-p)^{N-1} \cdot (1-p)^{N-1} \\ & = p \cdot (1-p)^{2(N-1)} \end{aligned}$$

... choosing optimum  $p$  and then letting  $n \rightarrow \text{infy}$  ...

$$= 1/(2e) = .18$$

**even worse than slotted Aloha!**

5: DataLink Layer 5-15

## CSMA (Carrier Sense Multiple Access)

**CSMA**: listen before transmit:

If channel sensed idle: transmit entire frame

- If channel sensed busy, defer transmission
- human analogy: don't interrupt others!


5: DataLink Layer 5-16

## CSMA collisions

collisions *can* still occur:  
propagation delay means  
two nodes may not hear  
each other's transmission

collision:  
entire packet transmission  
time wasted

note:  
role of distance & propagation  
delay in determining collision  
probability

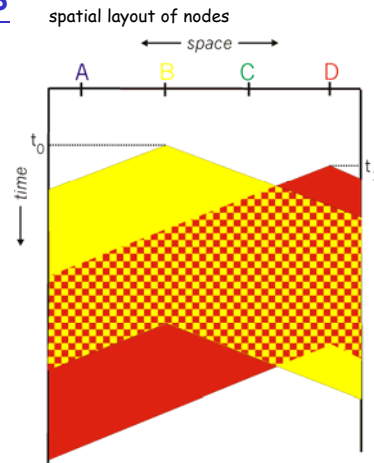

5: DataLink Layer 5-17


## CSMA/CD (Collision Detection)

CSMA/CD: carrier sensing, deferral as in CSMA

- collisions *detected* within short time
- colliding transmissions aborted, reducing channel wastage
- collision detection:
  - easy in wired LANs: measure signal strengths, compare transmitted, received signals
  - difficult in wireless LANs: received signal strength overwhelmed by local transmission strength
- human analogy: the polite conversationalist

5: DataLink Layer 5-18

## CSMA/CD collision detection

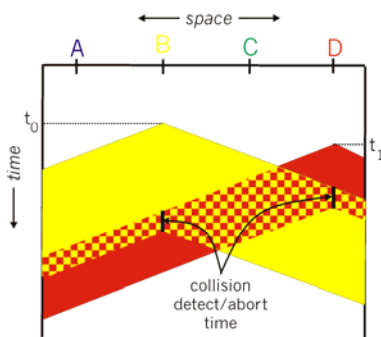

5: DataLink Layer 5-19

## "Taking Turns" MAC protocols

channel partitioning MAC protocols:

- share channel *efficiently* and *fairly* at high load
- inefficient at low load: delay in channel access, 1/N bandwidth allocated even if only 1 active node!

Random access MAC protocols

- efficient at low load: single node can fully utilize channel
- high load: collision overhead

"taking turns" protocols


look for best of both worlds!

5: DataLink Layer 5-20

## "Taking Turns" MAC protocols

### Polling:

- ❑ master node "invites" slave nodes to transmit in turn
- ❑ typically used with "dumb" slave devices
- ❑ concerns:
  - polling overhead
  - latency
  - single point of failure (master)




5: DataLink Layer 5-21

## "Taking Turns" MAC protocols

### Token passing:

- ❑ control **token** passed from one node to next sequentially.
- ❑ token message
- ❑ concerns:
  - token overhead
  - latency
  - single point of failure (token)

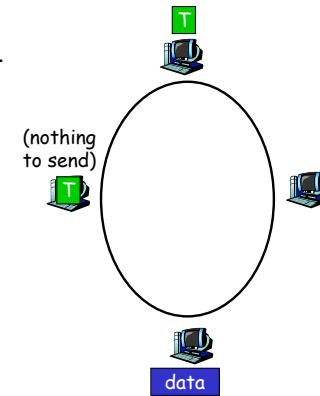

5: DataLink Layer 5-22

## Summary of MAC protocols

- ❑ *channel partitioning*, by time, frequency or code
  - Time Division, Frequency Division
- ❑ *random access* (dynamic),
  - ALOHA, S-ALOHA, CSMA, CSMA/CD
  - carrier sensing: easy in some technologies (wire), hard in others (wireless)
  - CSMA/CD used in Ethernet
  - CSMA/CA used in 802.11
- ❑ *taking turns*
  - polling from central site, token passing
  - Bluetooth, FDDI, IBM Token Ring

5: DataLink Layer 5-23

## LAN technologies

Data link layer so far:

- services, error detection/correction, multiple access

Next: LAN technologies

- addressing
- Ethernet
- switches
- PPP

5: DataLink Layer 5-24

## Link Layer

- 5.1 Introduction and services
- 5.2 Error detection and correction
- 5.3 Multiple access protocols
- 5.4 Link-Layer Addressing
- 5.5 Ethernet
- 5.6 Link-layer switches
- 5.7 PPP
- 5.8 Link Virtualization: ATM, MPLS

5: DataLink Layer 5-25


## MAC Addresses and ARP

- 32-bit IP address:
  - *network-layer* address
  - used to get datagram to destination IP subnet
- MAC (or LAN or physical or Ethernet) address:
  - function: *get frame from one interface to another physically-connected interface (same network)*
  - 48 bit MAC address (for most LANs)
    - burned in NIC ROM, also sometimes software settable

5: DataLink Layer 5-26

## LAN Addresses and ARP

Each adapter on LAN has unique LAN address

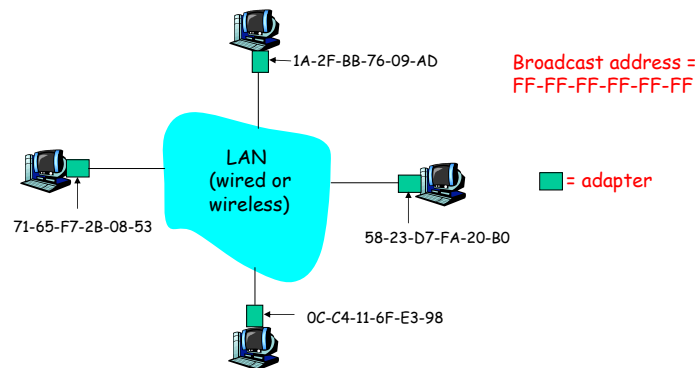

5: DataLink Layer 5-27


## LAN Address (more)

- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- analogy:
  - (a) MAC address: like Social Security Number
  - (b) IP address: like postal address
- MAC flat address → portability
  - can move LAN card from one LAN to another
- IP hierarchical address NOT portable
  - address depends on IP subnet to which node is attached

5: DataLink Layer 5-28

## ARP: Address Resolution Protocol

**Question:** how to determine MAC address of B knowing B's IP address?

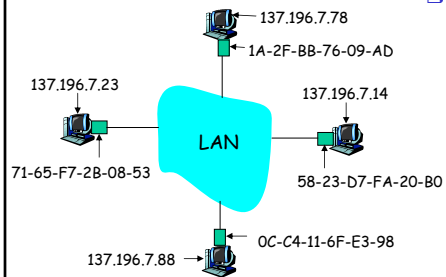

- Each IP node (host, router) on LAN has **ARP** table
- ARP table: IP/MAC address mappings for some LAN nodes
  - < IP address; MAC address; TTL >
  - TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

5: DataLink Layer 5-29


## ARP protocol: Same LAN (network)

- A wants to send datagram to B, and B's MAC address not in A's ARP table.
  - A **broadcasts** ARP query packet, containing B's IP address
  - dest MAC address = FF-FF-FF-FF-FF
  - all machines on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) MAC address
  - frame sent to A's MAC address (unicast)
- A caches (saves) IP-to-MAC address pair in its ARP table until information becomes old (times out)
  - soft state: information that times out (goes away) unless refreshed
- ARP is "plug-and-play":
  - nodes create their ARP tables *without intervention from net administrator*

5: DataLink Layer 5-30

## Addressing: routing to another LAN

walkthrough: **send datagram from A to B via R**  
assume A knows B's IP address

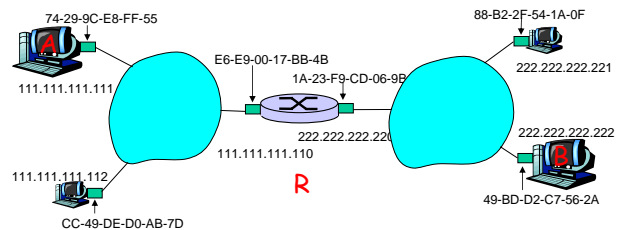


- two ARP tables in router R, one for each IP network (LAN)

5: DataLink Layer 5-31

- A creates IP datagram with source A, destination B
- A uses ARP to get R's MAC address for 111.111.111.110
- A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram
- A's NIC sends frame
- R's NIC receives frame
- R removes IP datagram from Ethernet frame, sees its destined to B
- R uses ARP to get B's MAC address
- R creates frame containing A-to-B IP datagram sends to B

This is a really important example - make sure you understand!

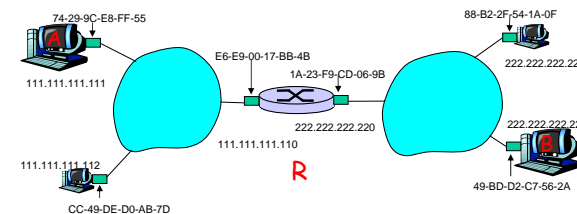

5: DataLink Layer 5-32