

Cameras

Digital Visual Effects, Spring 2009

Yung-Yu Chuang


2009/2/26

with slides by Fredo Durand, Brian Curless, Steve Seitz and Alexei Efros

Announcements


- Do subscribe the mailing list
- Assignment #1 announced on 3/4 (due on 3/24 midnight)
- It is for warming up and considered easier; it is suggested that you implement at least one bonus (MTB/tone mapping/other HDR construction)
- You have a total of 10 days of delay without penalty for assignments; after that, -1 point per day applies in your final grade until reaching zero for each project.

Camera trial #1

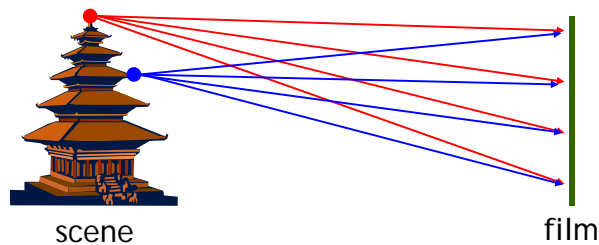

Put a piece of film in front of an object.


Pinhole camera

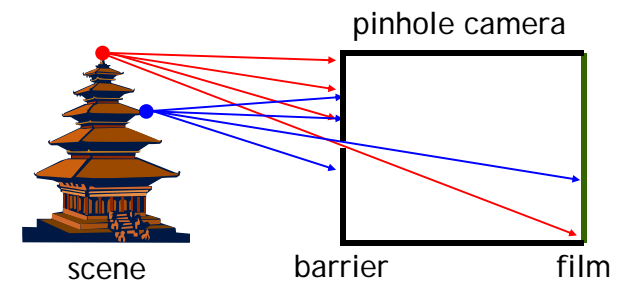

Add a barrier to block off most of the rays.

- It reduces blurring
- The pinhole is known as the aperture
- The image is inverted


Shrinking the aperture

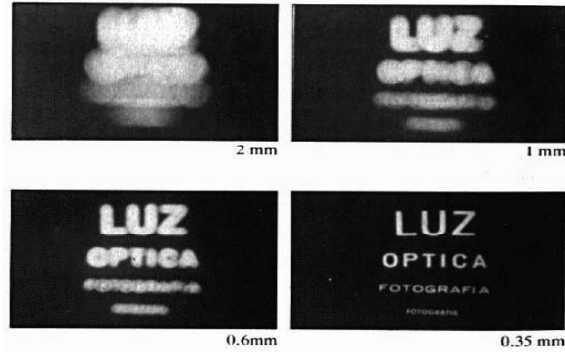


Why not making the aperture as small as possible?

- Less light gets through
- Diffraction effect


Shrinking the aperture

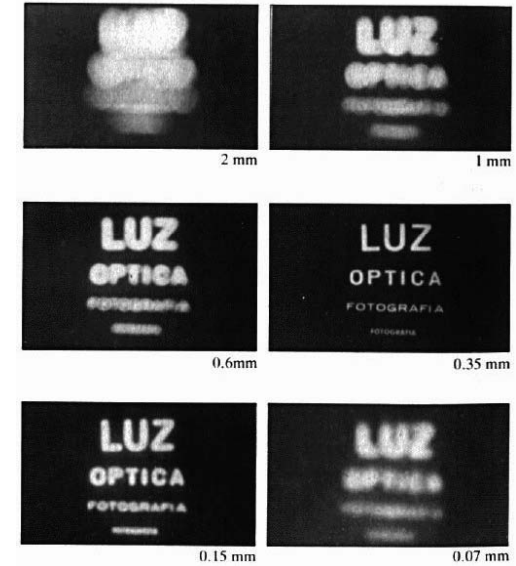


High-end commercial pinhole cameras



\$200~\$700

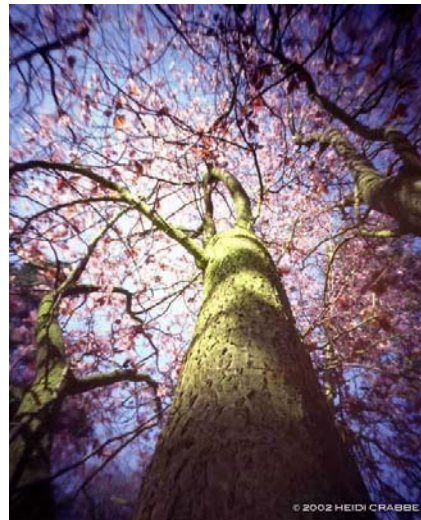


Adding a lens

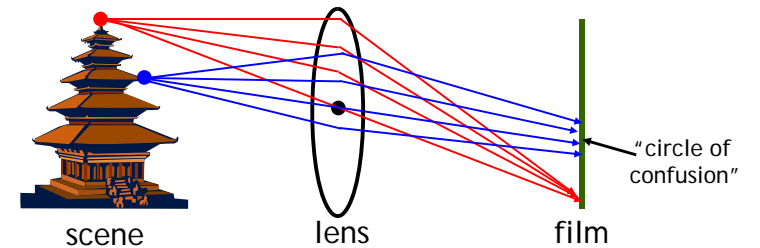

A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
- other points project to a "circle of confusion" in the image

Lenses

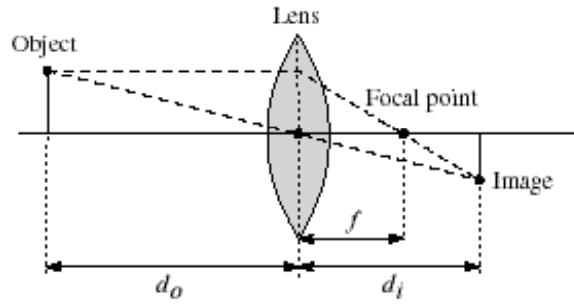


Thin lens equation: $\frac{1}{d_o} + \frac{1}{d_i} = \frac{1}{f}$

- Any object point satisfying this equation is in focus
- Thin lens applet:

http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html


Thin lens formula

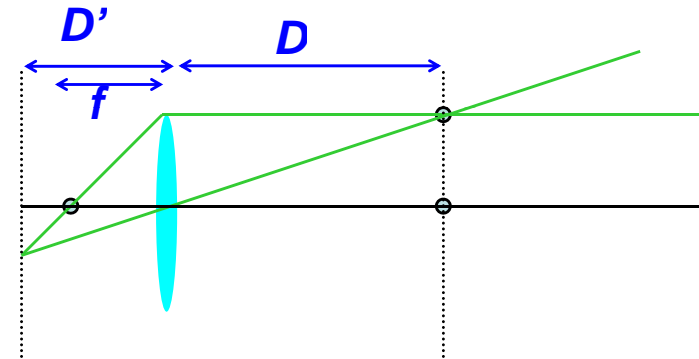

Frédo Durand's slide

Thin lens formula


Similar triangles everywhere!

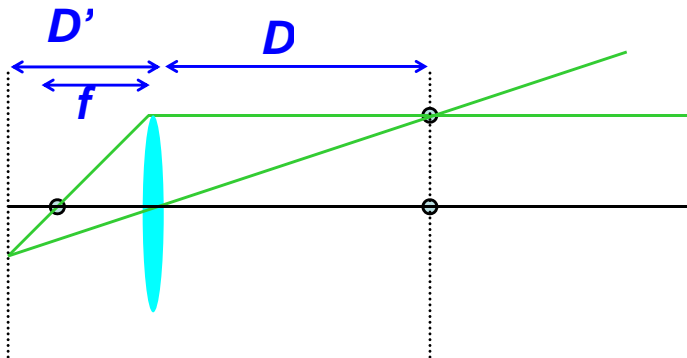

Frédo Durand's slide

Thin lens formula

Similar triangles everywhere! $y'/y = D'/D$

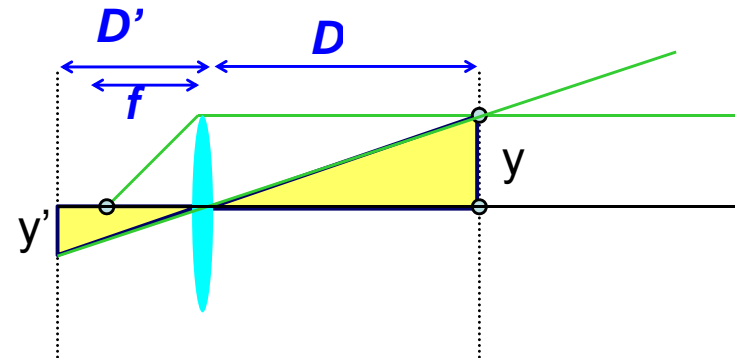


Frédo Durand's slide

Thin lens formula

Similar triangles everywhere!

$$y'/y = D'/D$$

$$y'/y = (D'-f)/D$$

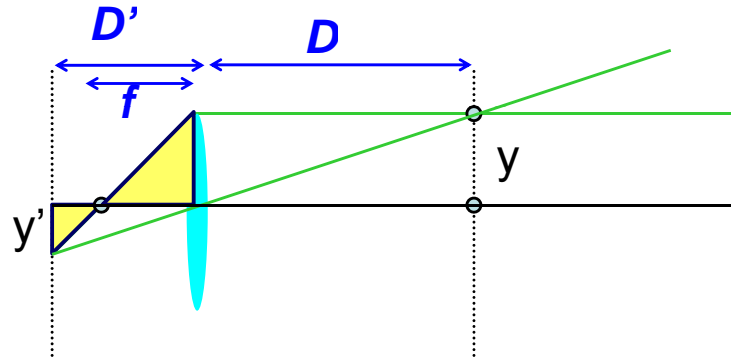


Frédo Durand's slide

Thin lens formula


$$\frac{1}{D'} + \frac{1}{D} = \frac{1}{f}$$

The focal length f determines the lens's ability to bend (refract) light. It is a function of the shape and index of refraction of the lens.

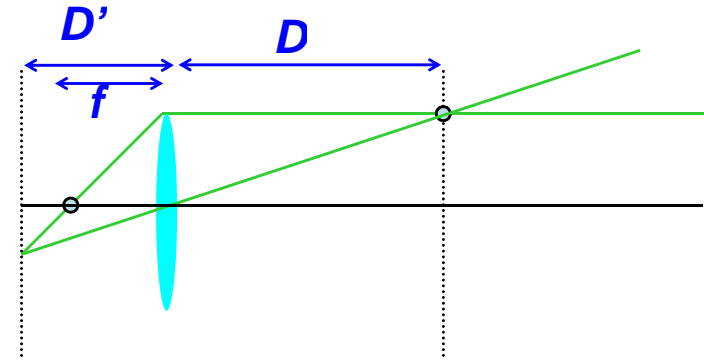

Frédo Durand's slide

Zoom lens

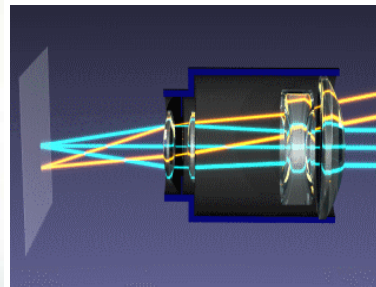


simplified zoom lens in operation

Nikkor 28-200mm zoom lens.

From wikipedia

Field of view vs focal length

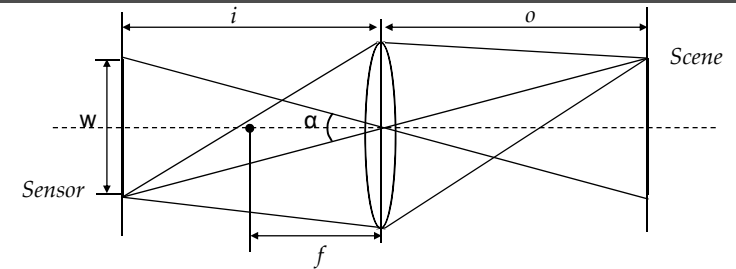

Gaussian Lens Formula: $\frac{1}{i} + \frac{1}{o} = \frac{1}{f}$


Field of View: $\alpha = 2\arctan(w/(2i)) \approx 2\arctan(w/(2f))$

Example: $w = 30\text{mm}, f = 50\text{mm} \Rightarrow \alpha \approx 33.4^\circ$

Slides from Li Zhang

Focal length in practice

DigiVFX

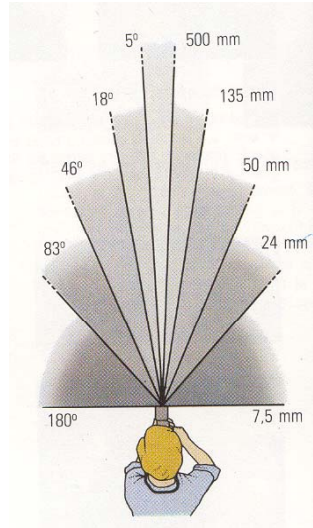

24mm



50mm



135mm



Focal length in practice

DigiVFX




wide angle

standard

telephoto

Distortion

DigiVFX

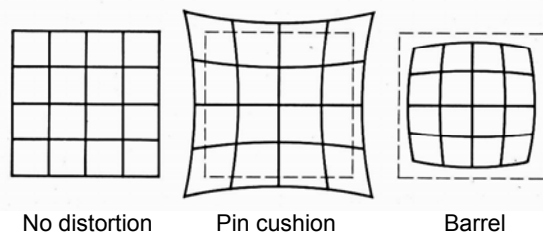

No distortion

Pin cushion

Barrel

- Radial distortion of the image
 - Caused by imperfect lenses
 - Deviations are most noticeable for rays that pass through the edge of the lens


Correcting radial distortion

DigiVFX




from [Helmut Dersch](#)

Vignetting



Slides from Li Zhang

Vignetting




original corrected


Goldman & Seitz ICCV 2005

Slides from Li Zhang

Chromatic Aberration



Lens has different refractive indices for different wavelengths.




Special lens systems using two or more pieces of glass with different refractive indexes can reduce or eliminate this problem.



http://www.dpreview.com/learn/?/Glossary/Optical/chromatic_aberration_01.htm

Slides from Li Zhang

Exposure = aperture + shutter speed

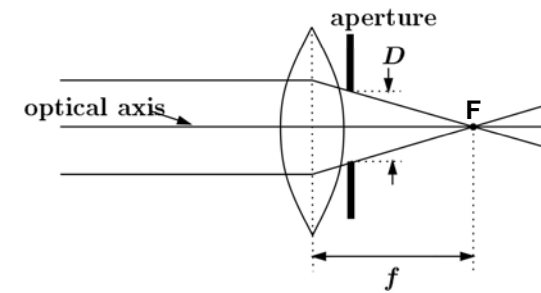


- Aperture of diameter D restricts the range of rays (aperture may be on either side of the lens)
- Shutter speed is the amount of time that light is allowed to pass through the aperture

Exposure

- Two main parameters:

- Aperture (in f stop)

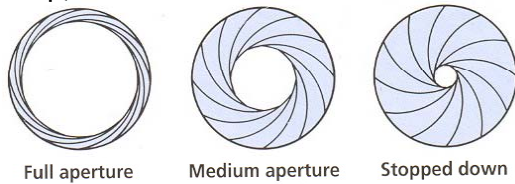


Full aperture

Medium aperture

Stopped down

- Shutter speed (in fraction of a second)

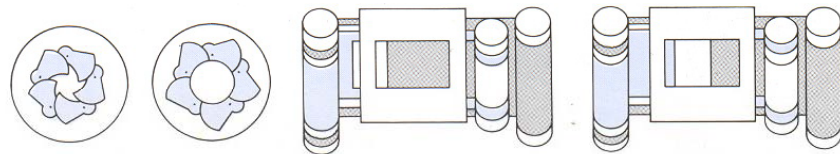


Blade (closing) Blade (open)

Focal plane (closed)

Focal plane (open)

Aperture

- Aperture is the diameter of the lens opening, usually specified by f-stop, f/D , a fraction of the focal length.
 - $f/2.0$ on a 50mm means that the aperture is 25mm
 - $f/2.0$ on a 100mm means that the aperture is 50mm
- When a change in f-stop occurs, the light is either doubled or cut in half.
- Lower f-stop, more light (larger lens opening)
- Higher f-stop, less light (smaller lens opening)

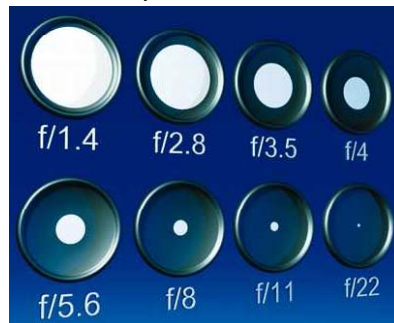

f/1.4

f/2.8

f/3.5

f/4

f/5.6


f/8

f/11

f/22

Effects of shutter speeds

- Slower shutter speed => more light, but more motion blur

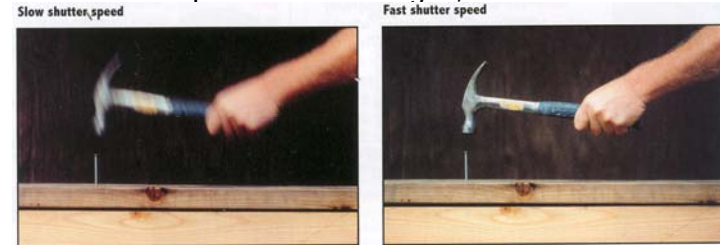

From Photography, London et al.

- Faster shutter speed freezes motion

Walking people

Running people

Car

Fast train



1/125


1/250

1/500

1/1000


Depth of field

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus

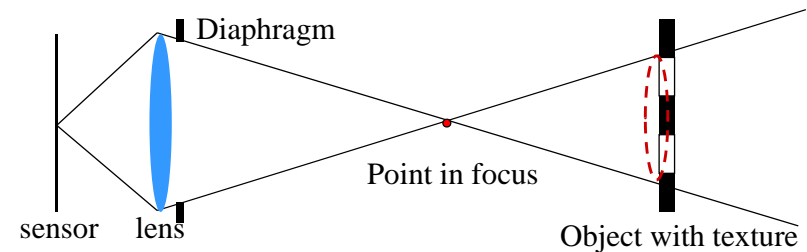


Depth of field

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus

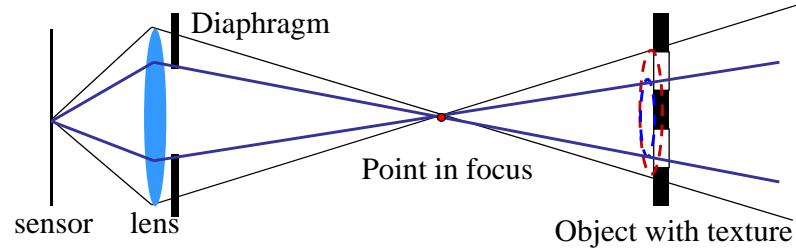

Depth of field

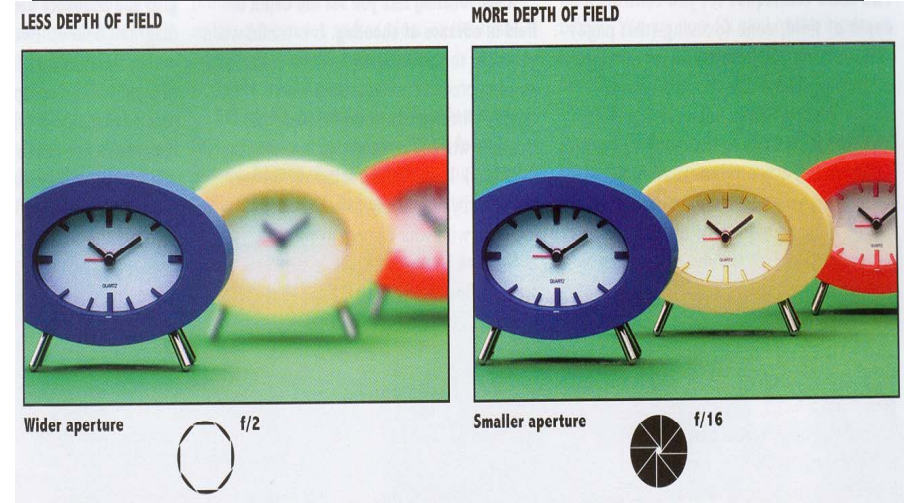

From Photography, London et al.

Exposure

- Two main parameters:
 - Aperture (in f stop)
 - Shutter speed (in fraction of a second)
- Reciprocity
 - The same exposure is obtained with an exposure twice as long and an aperture *area* half as big
 - Hence square root of two progression of f stops vs. power of two progression of shutter speed
 - Reciprocity can fail for very long exposures



From Photography, London et al.

Reciprocity

- Assume we know how much light we need
- We have the choice of an infinity of shutter speed/aperture pairs
 - 1/16, 1/11, 1/8, 1/5.6, 1/4, 1/2.8, 1/2
 - 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500
- What will guide our choice of a shutter speed?
 - Freeze motion vs. motion blur, camera shake
- What will guide our choice of an aperture?
 - Depth of field, diffraction limit
- Often we must compromise
 - Open more to enable faster speed (but shallow DoF)

Exposure & metering


- The camera metering system measures how bright the scene is
- In Aperture priority mode, the photographer sets the aperture, the camera sets the shutter speed
- In Shutter-speed priority mode, photographers sets the shutter speed and the camera deduces the aperture
- In Program mode, the camera decides both exposure and shutter speed (middle value more or less)
- In Manual mode, the user decides everything (but can get feedback)

Pros and cons of various modes

- Aperture priority
 - Direct depth of field control
 - Cons: can require impossible shutter speed (e.g. with f/1.4 for a bright scene)
- Shutter speed priority
 - Direct motion blur control
 - Cons: can require impossible aperture (e.g. when requesting a 1/1000 speed for a dark scene)
 - Note that aperture is somewhat more restricted
- Program
 - Almost no control, but no need for neurons
- Manual
 - Full control, but takes more time and thinking

Sensitivity (ISO)

- Third variable for exposure
- Linear effect (200 ISO needs half the light as 100 ISO)
- Film photography: trade sensitivity for grain

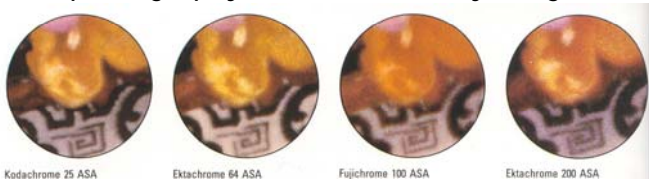

Kodachrome 25 ASA

Ektachrome 64 ASA

Fujichrome 100 ASA

Ektachrome 200 ASA

- Digital photography: trade sensitivity for noise




Demo

See <http://www.photonhead.com/simcam/>


Film camera

DigiVFX

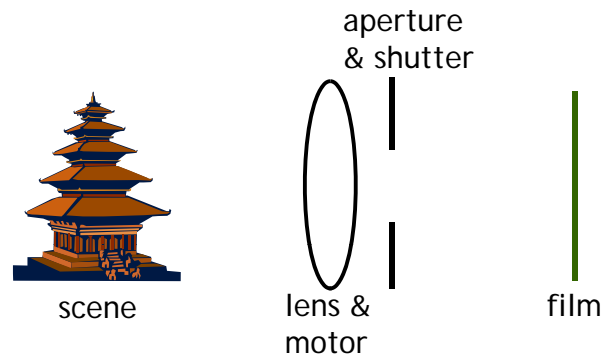

Digital camera

DigiVFX

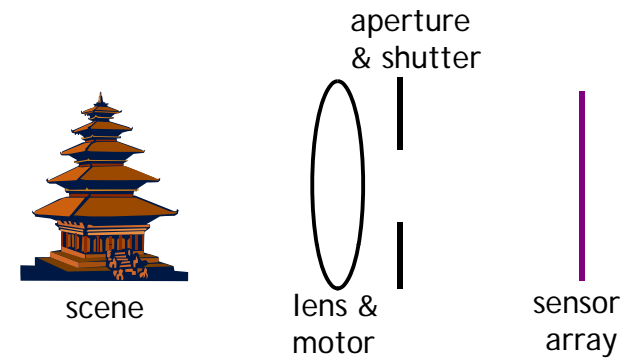


- A digital camera replaces film with a sensor array
- Each cell in the array is a light-sensitive diode that converts photons to electrons


CCD v.s. CMOS

DigiVFX

- CCD is less susceptible to noise (special process, higher fill factor)
- CMOS is more flexible, less expensive (standard process), less power consumption

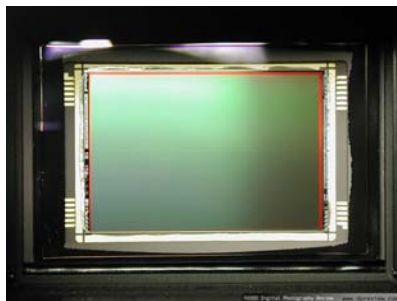

CCD




CMOS


Sensor noise

DigiVFX

- Blooming
- Diffusion
- Dark current
- Photon shot noise
- Amplifier readout noise



Blooming

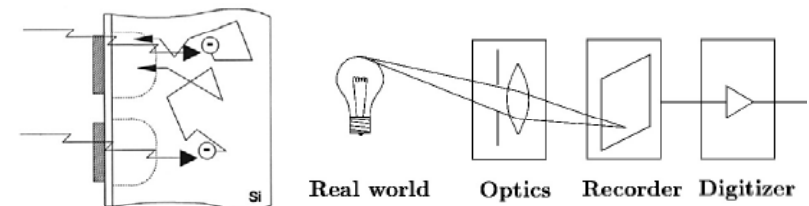

SLR (Single-Lens Reflex)


DigiVFX

- Reflex (R in SLR) means that we see through the same lens used to take the image.
- Not the case for compact cameras



SLR view finder

DigiVFX

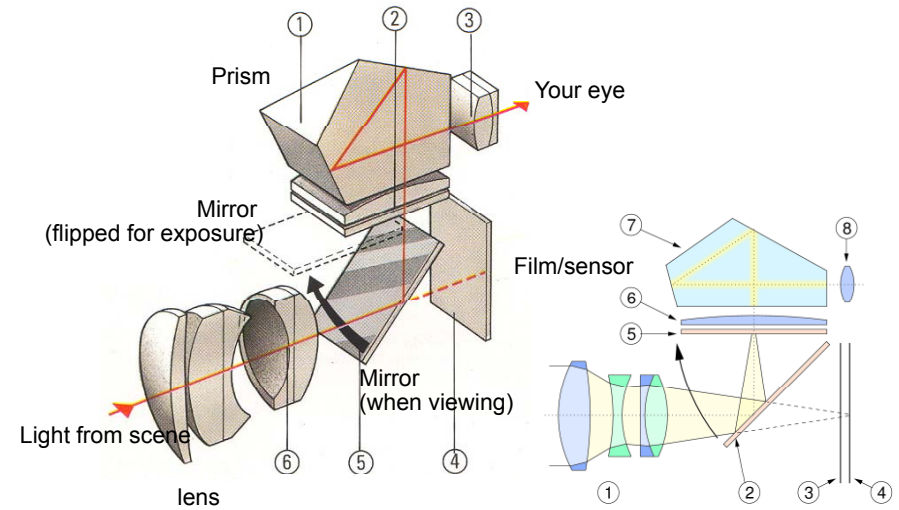

Color


DigiVFX

So far, we've only talked about monochrome sensors. Color imaging has been implemented in a number of ways:

- Field sequential
- Multi-chip
- Color filter array
- X3 sensor


Field sequential

DigiVFX

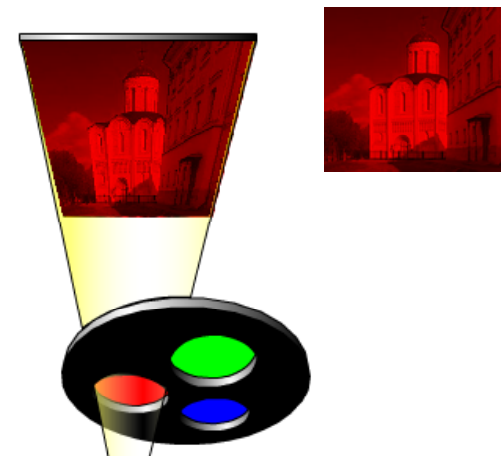


Field sequential

DigiVFX

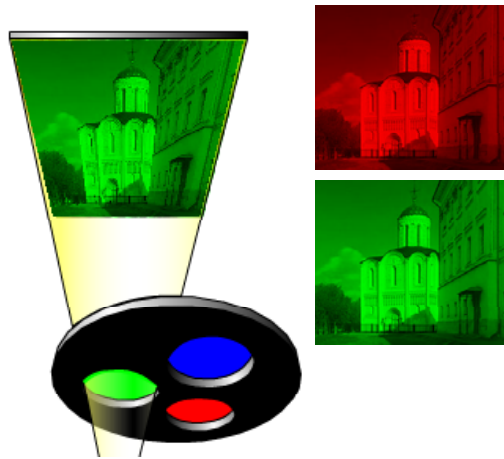

Field sequential

DigiVFX

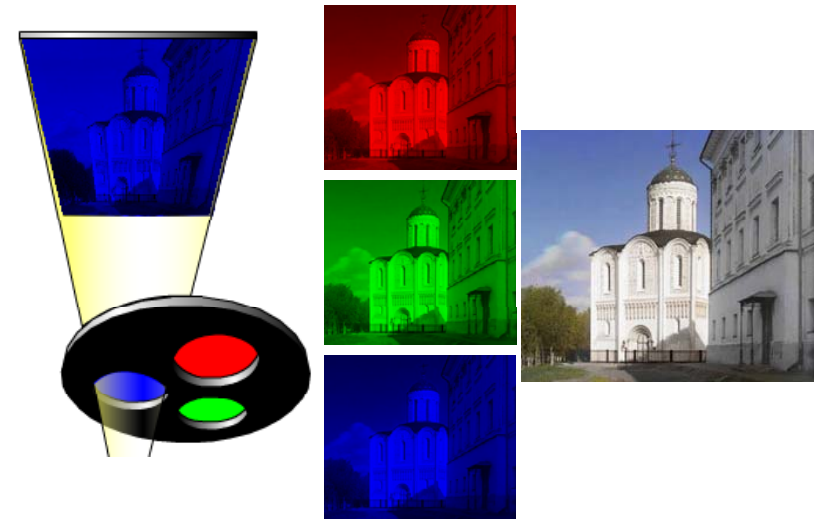

Prokudin-Gorskii (early 1900's)

DigiVFX




<http://www.loc.gov/exhibits/empire/>

Prokudin-Gorskii (early 1900's)


DigiVFX



Multi-chip

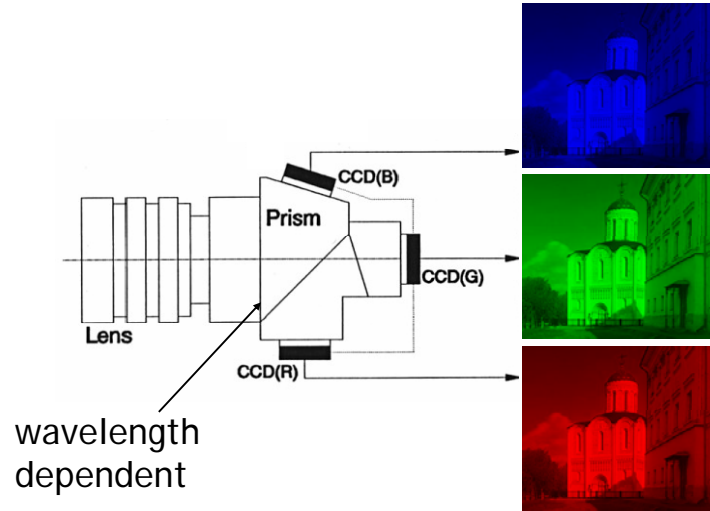


Embedded color filters

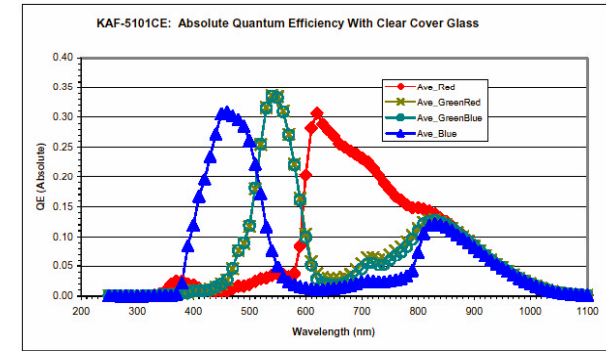


Color filters can be manufactured directly onto the photodetectors.

Color filter array

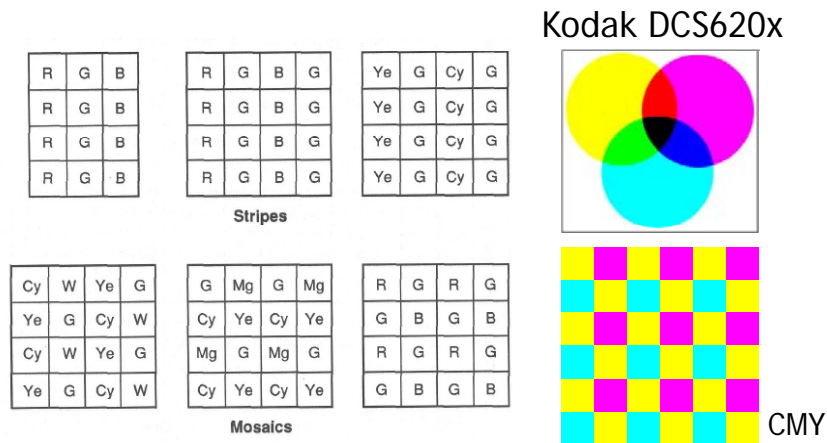


Color filter arrays (CFAs)/color filter mosaics

Why CMY CFA might be better

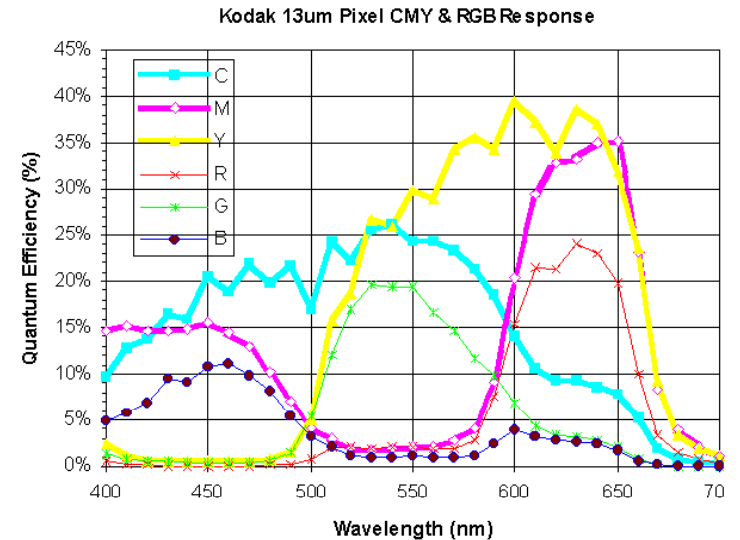


Color filter array

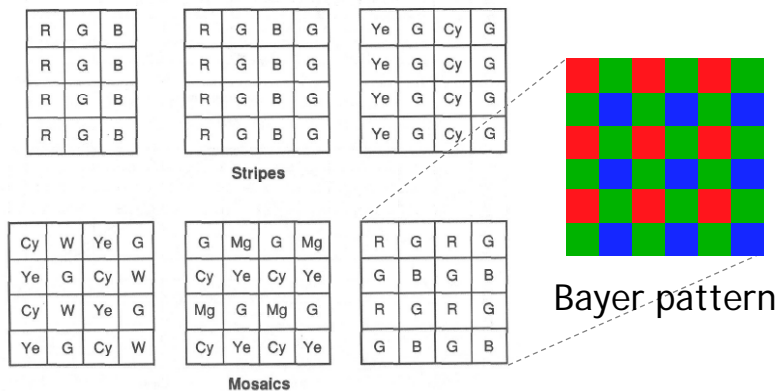


Color filter arrays (CFAs)/color filter mosaics


Bayer's pattern

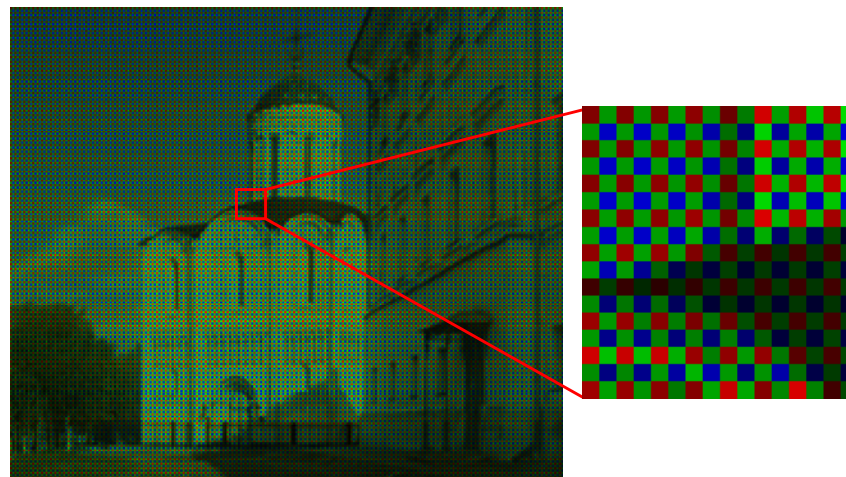

Demosaicking CFA's

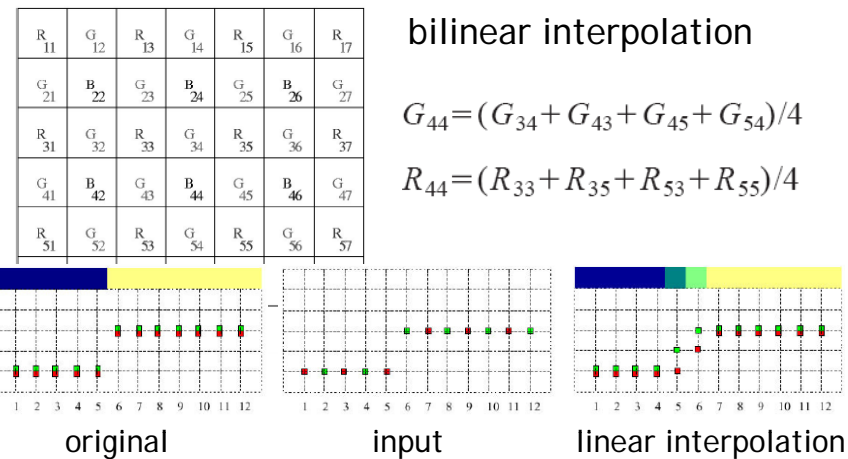

Demosaicking CFA's

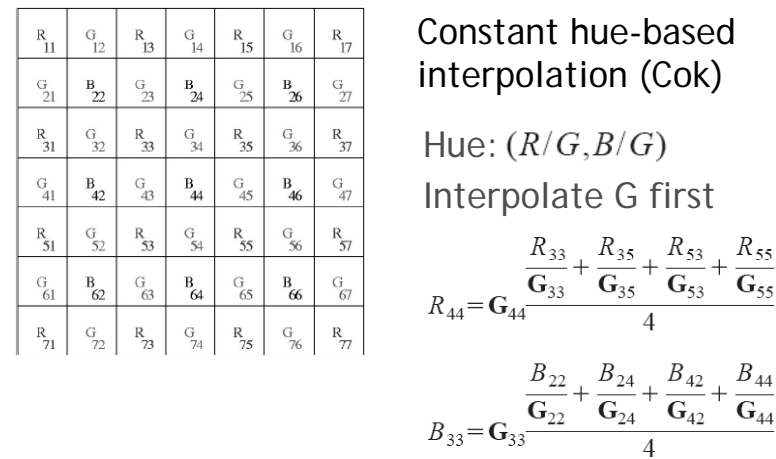

Demosaicking CFA's



R ₁₁	G ₁₂	R ₁₃	G ₁₄	R ₁₅	G ₁₆	R ₁₇
G ₂₁	B ₂₂	G ₂₃	B ₂₄	G ₂₅	B ₂₆	G ₂₇
R ₃₁	G ₃₂	R ₃₃	G ₃₄	R ₃₅	G ₃₆	R ₃₇
G ₄₁	B ₄₂	G ₄₃	B ₄₄	G ₄₅	B ₄₆	G ₄₇
R ₅₁	G ₅₂	R ₅₃	G ₅₄	R ₅₅	G ₅₆	R ₅₇
G ₆₁	B ₆₂	G ₆₃	B ₆₄	G ₆₅	B ₆₆	G ₆₇
R ₇₁	G ₇₂	R ₇₃	G ₇₄	R ₇₅	G ₇₆	R ₇₇


Median-based interpolation (Freeman)

1. Linear interpolation
2. Median filter on color differences

Demosaicking CFA's



Median-based interpolation (Freeman)

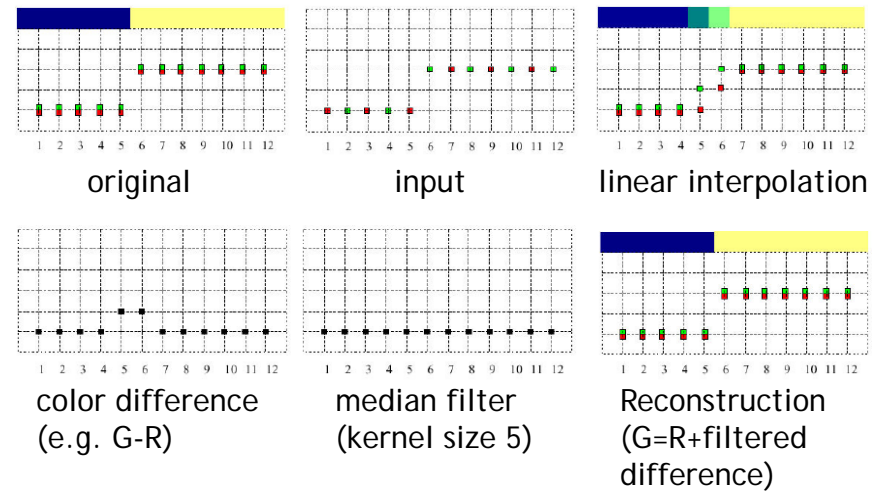

Demosaicking CFA's



R ₁₁	G ₁₂	R ₁₃	G ₁₄	R ₁₅	G ₁₆	R ₁₇
G ₂₁	B ₂₂	G ₂₃	B ₂₄	G ₂₅	B ₂₆	G ₂₇
R ₃₁	G ₃₂	R ₃₃	G ₃₄	R ₃₅	G ₃₆	R ₃₇
G ₄₁	B ₄₂	G ₄₃	B ₄₄	G ₄₅	B ₄₆	G ₄₇
R ₅₁	G ₅₂	R ₅₃	G ₅₄	R ₅₅	G ₅₆	R ₅₇
G ₆₁	B ₆₂	G ₆₃	B ₆₄	G ₆₅	B ₆₆	G ₆₇
R ₇₁	G ₇₂	R ₇₃	G ₇₄	R ₇₅	G ₇₆	R ₇₇

Gradient-based interpolation (LaRoche-Prescott)

1. Interpolation on G
- $$\alpha = \text{abs}[(B_{42} + B_{46})/2 - B_{44}]$$
- $$\beta = \text{abs}[(B_{24} + B_{64})/2 - B_{44}]$$
- $$G_{44} = \begin{cases} \frac{G_{43} + G_{45}}{2} & \text{if } \alpha < \beta \\ \frac{G_{34} + G_{54}}{2} & \text{if } \alpha > \beta \\ \frac{G_{43} + G_{45} + G_{34} + G_{54}}{4} & \text{if } \alpha = \beta \end{cases}$$

Demosaicking CFA's




R ₁₁	G ₁₂	R ₁₃	G ₁₄	R ₁₅	G ₁₆	R ₁₇
G ₂₁	B ₂₂	G ₂₃	B ₂₄	G ₂₅	B ₂₆	G ₂₇
R ₃₁	G ₃₂	R ₃₃	G ₃₄	R ₃₅	G ₃₆	R ₃₇
G ₄₁	B ₄₂	G ₄₃	B ₄₄	G ₄₅	B ₄₆	G ₄₇
R ₅₁	G ₅₂	R ₅₃	G ₅₄	R ₅₅	G ₅₆	R ₅₇
G ₆₁	B ₆₂	G ₆₃	B ₆₄	G ₆₅	B ₆₆	G ₆₇
R ₇₁	G ₇₂	R ₇₃	G ₇₄	R ₇₅	G ₇₆	R ₇₇


Gradient-based interpolation (LaRoche-Prescott)

2. Interpolation of color differences
- $$R_{34} = \frac{(R_{33} - G_{33}) + (R_{35} - G_{35})}{2} + G_{34}$$
- $$R_{43} = \frac{(R_{33} - G_{33}) + (R_{53} - G_{53})}{2} + G_{43}$$
- $$R_{44} = \frac{(R_{33} - G_{33}) + (R_{35} - G_{35}) + (R_{53} - G_{53}) + (R_{55} - G_{55})}{4} + G_{44}$$

Demosaicking CFA's

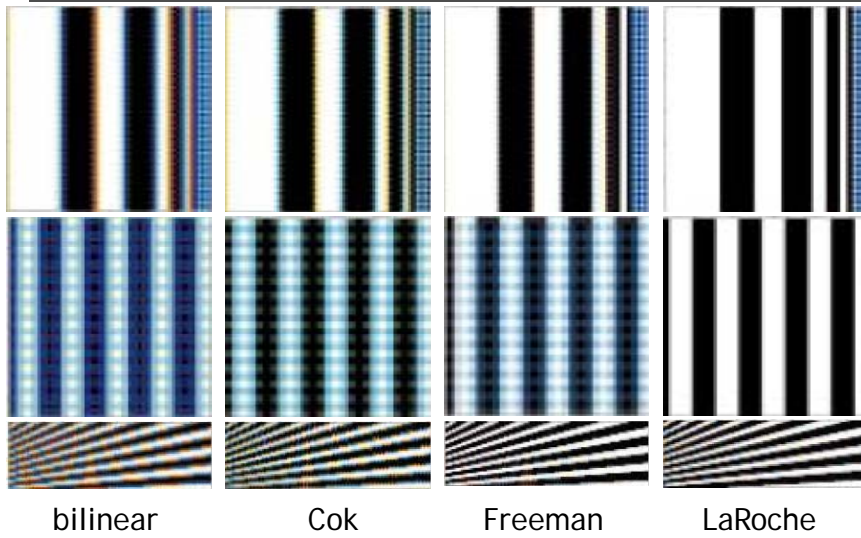


Demosaicking CFA's

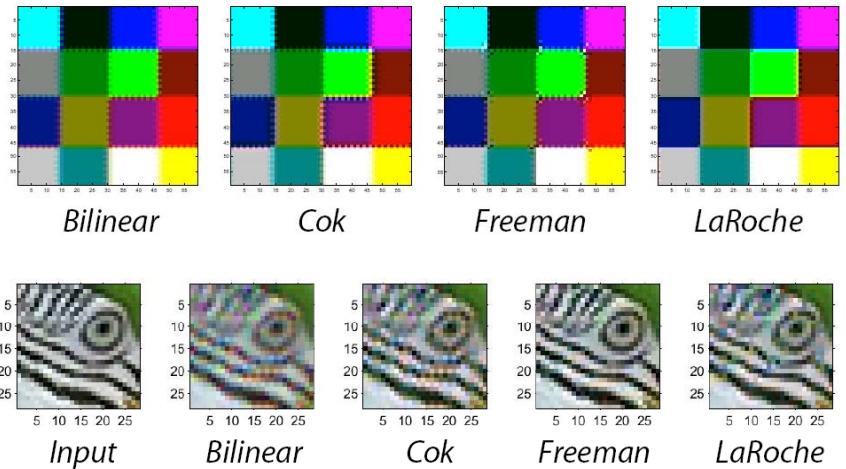



Generally, Freeman's is the best, especially for natural images.

Foveon X3 sensor



- light penetrates to different depths for different wavelengths
- multilayer CMOS sensor gets 3 different spectral sensitivities

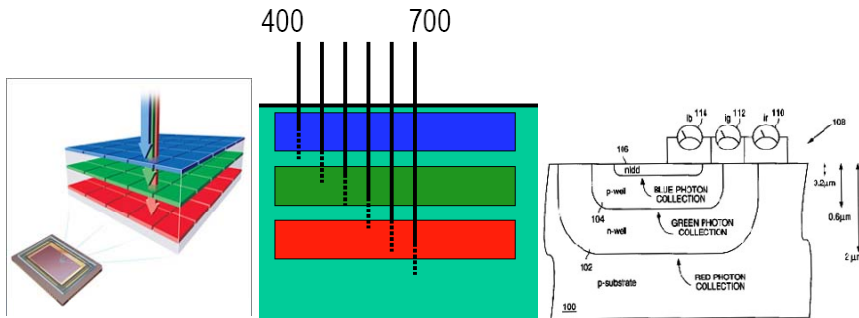

Color filter array

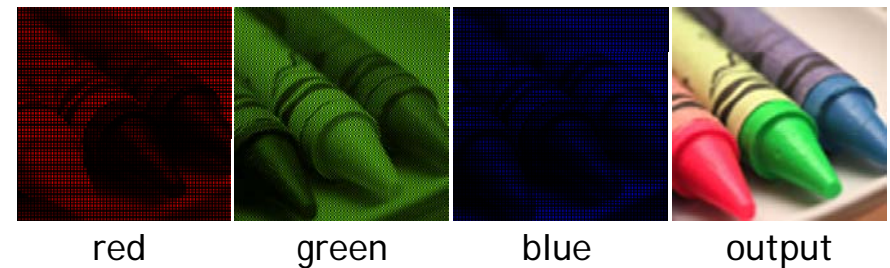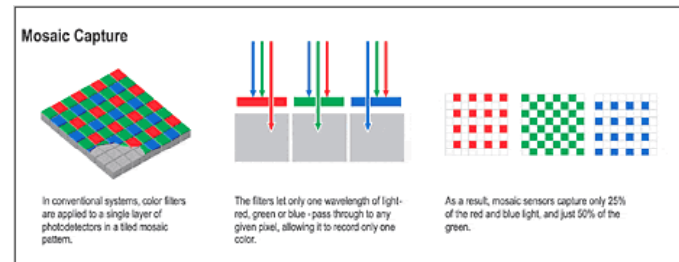


X3 technology

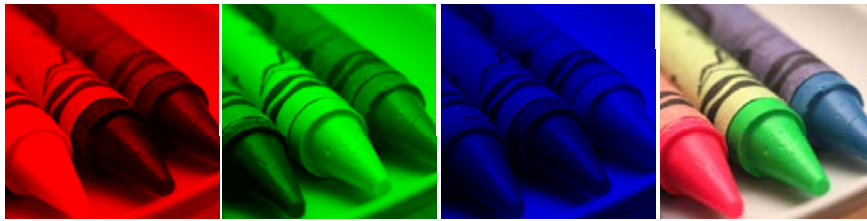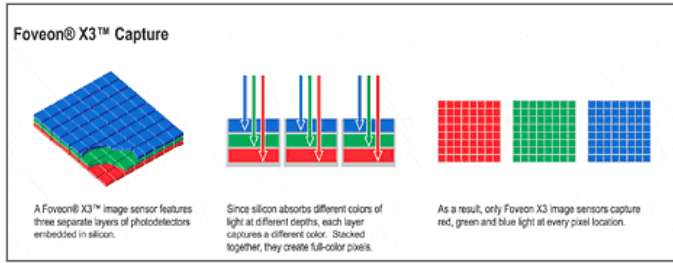

red green blue output

Foveon X3 sensor

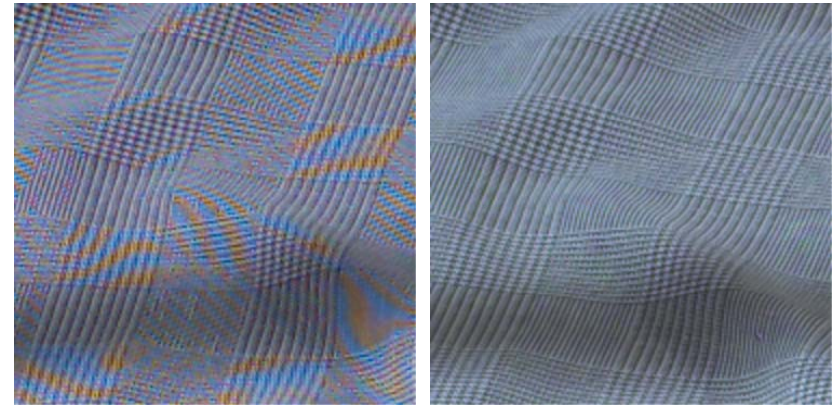

Bayer CFA

X3 sensor

Cameras with X3



Sigma SD10, SD9



Polaroid X530

Sigma SD9 vs Canon D30



Color processing

- After color values are recorded, more color processing usually happens:
 - White balance
 - Non-linearity to approximate film response or match TV monitor gamma


White Balance



warmer +3

automatic white balance

Manual white balance

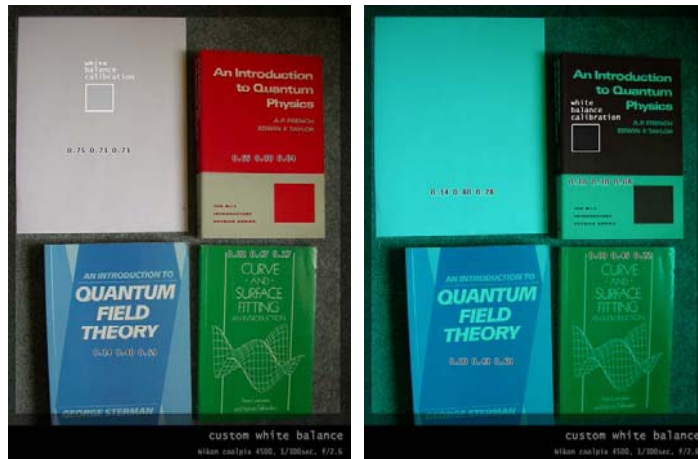


white balance with the white book

white balance with the red book

Autofocus

- Active
 - Sonar
 - Infrared
- Passive

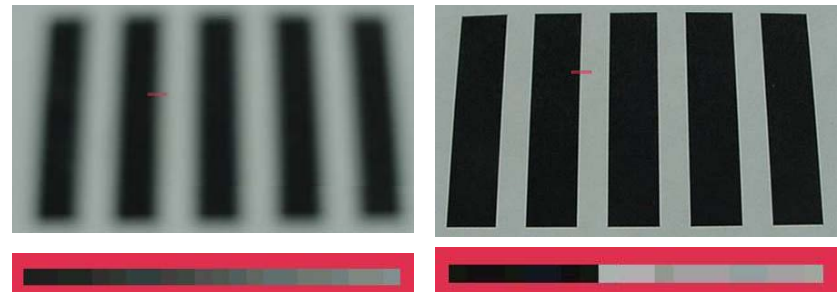


Digital camera review website

DigiVFX

- [A cool video of digital camera illustration](#)
- <http://www.dpreview.com/>

Camcorder

DigiVFX

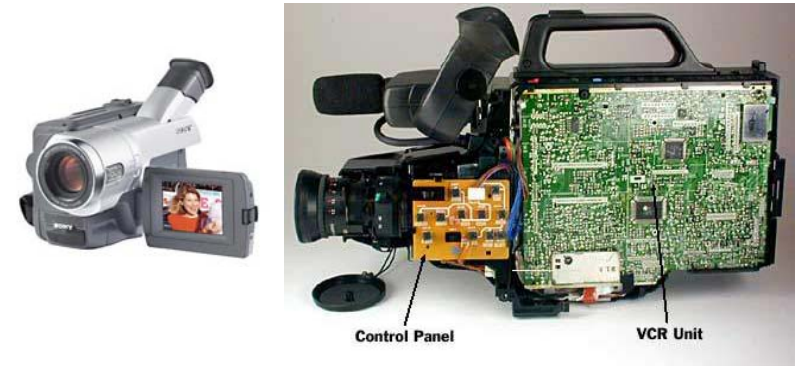

Interlacing

DigiVFX




without interlacing

with interlacing

Deinterlacing

DigiVFX

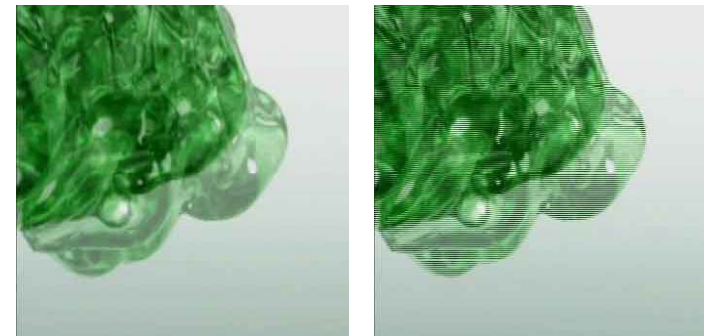

blend

weave

Deinterlacing

DigiVFX



Discard
(even field only or
odd field only)

Progressive scan

Hard cases

DigiVFX



References

DigiVFX

- <http://www.howstuffworks.com/digital-camera.htm>
- <http://electronics.howstuffworks.com/autofocus.htm>
- Ramanath, Snyder, Bilbro, and Sander. [Demosaicking Methods for Bayer Color Arrays](#), Journal of Electronic Imaging, 11(3), pp306-315.
- Rajeev Ramanath, Wesley E. Snyder, Youngjun Yoo, Mark S. Drew, [Color Image Processing Pipeline in Digital Still Cameras](#), IEEE Signal Processing Magazine Special Issue on Color Image Processing, vol. 22, no. 1, pp. 34-43, 2005.
- <http://www.worldatwar.org/photos/whitebalance/index.mhtml>
- <http://www.100fps.com/>