

# Cameras


Digital Visual Effects

*Yung-Yu Chuang*

*with slides by Fredo Durand, Brian Curless, Steve Seitz and Alexei Efros*

# Camera trial #1


---

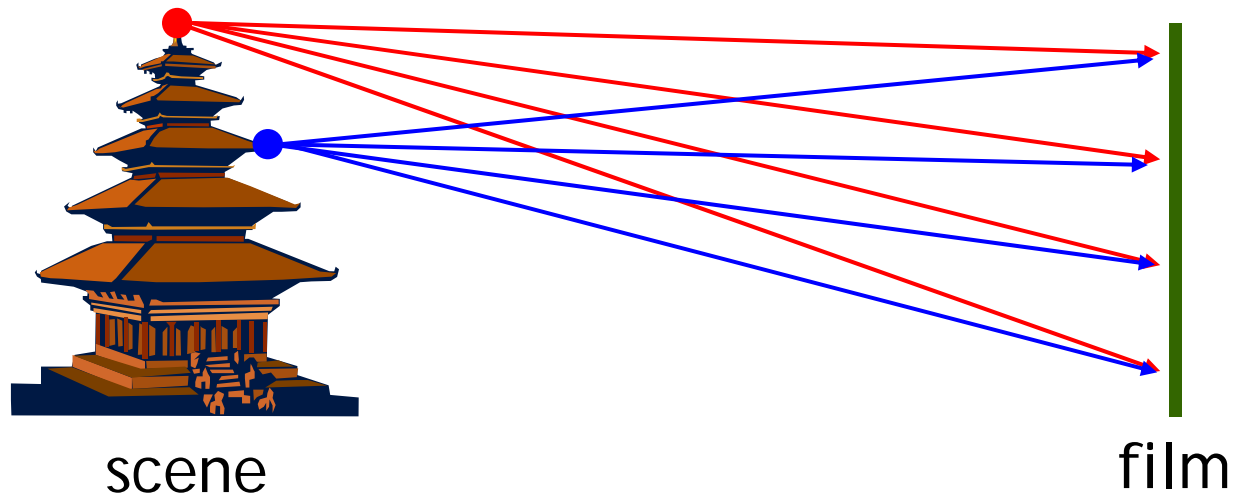

Put a piece of film in front of an object.

# Pinhole camera

---

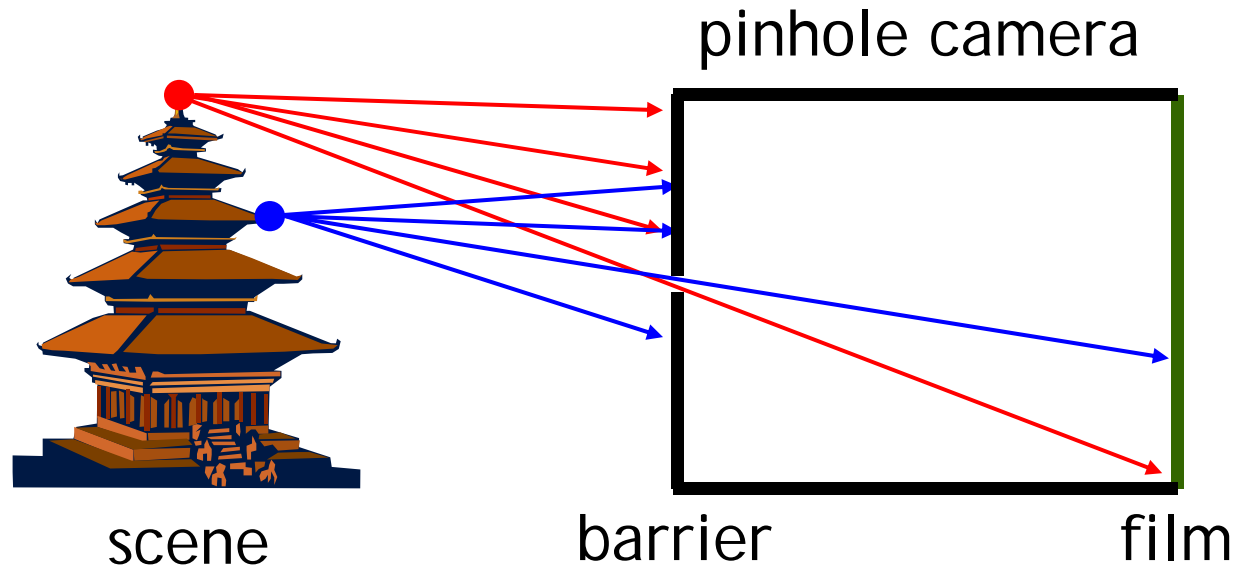


Add a barrier to block off most of the rays.

- It reduces blurring
- The pinhole is known as the aperture
- The image is inverted

# Shrinking the aperture


---

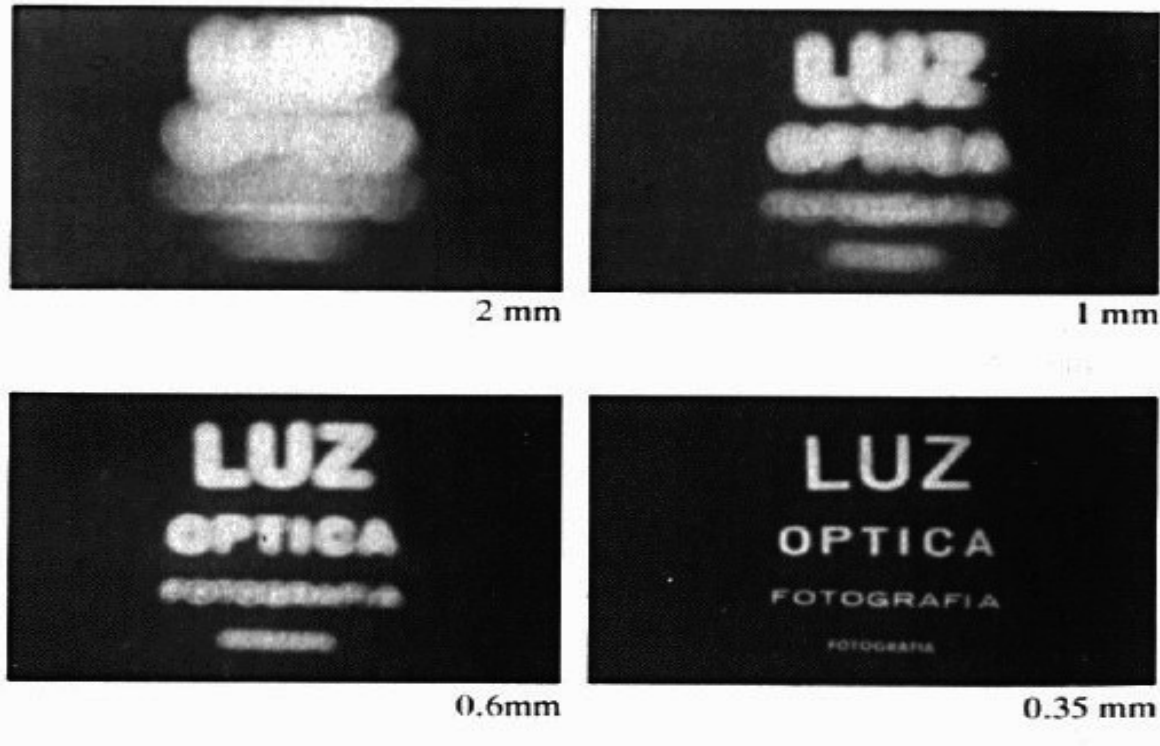


Why not making the aperture as small as possible?

- Less light gets through
- Diffraction effect

# Shrinking the aperture

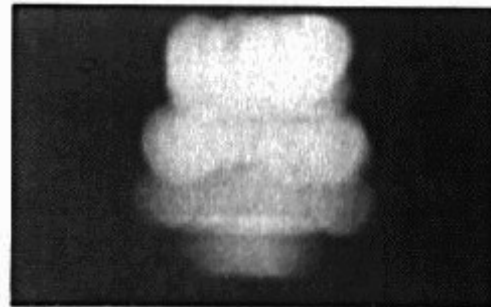


2 mm

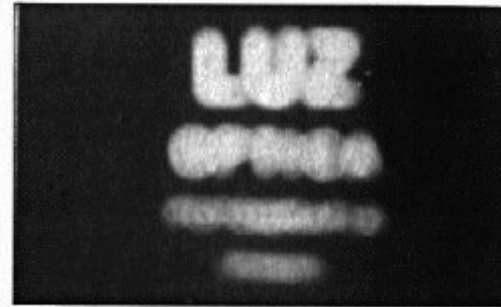

1 mm



0.6mm

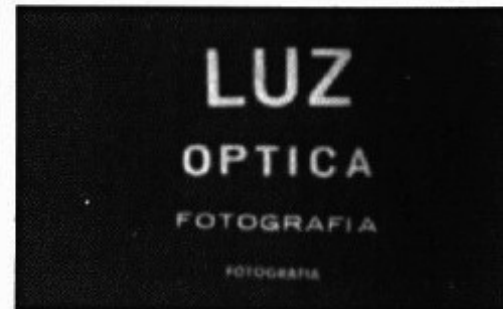

0.35 mm




0.15 mm



0.07 mm


# High-end commercial pinhole cameras DigiVFX

---

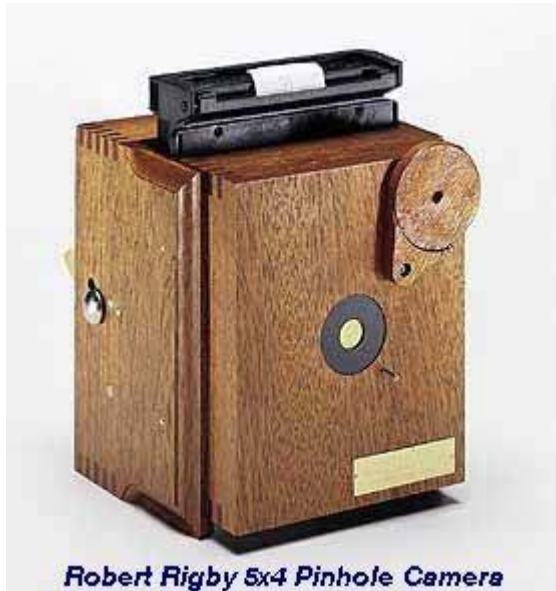

*Robert Rigby 5x4 Pinhole Camera*

\$200~\$700

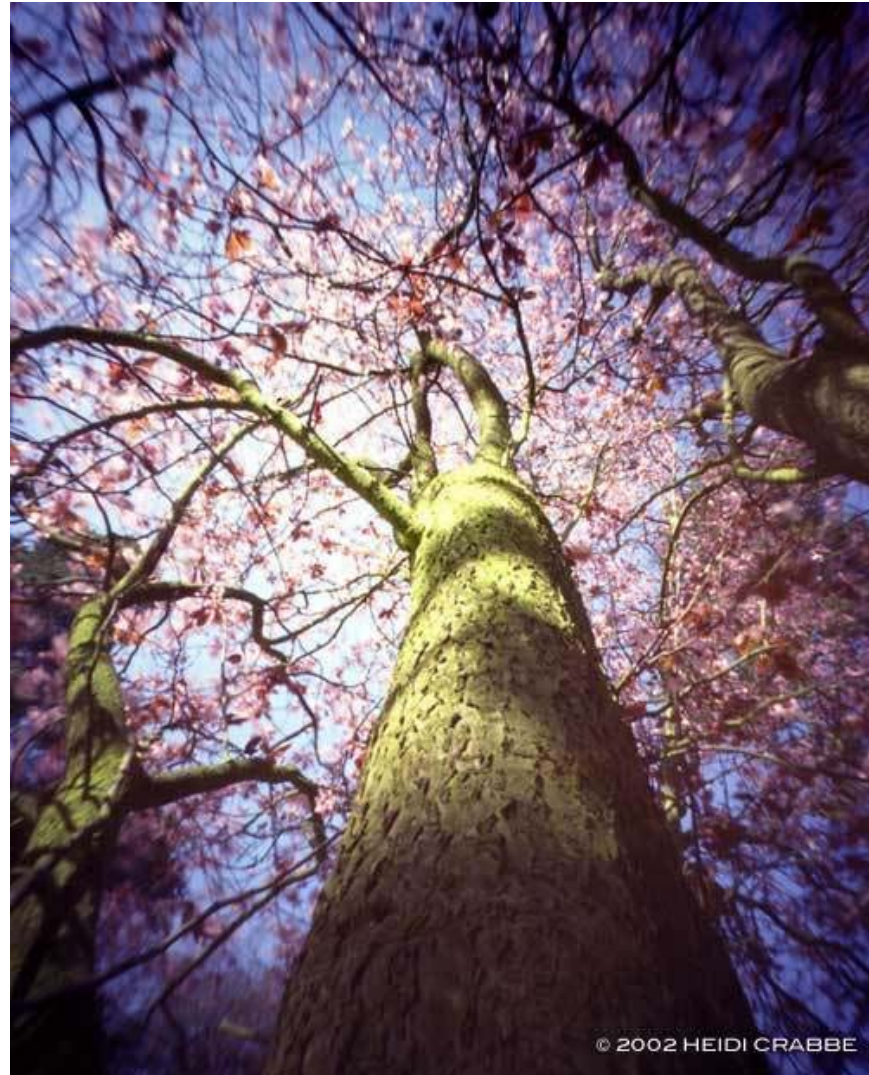


© 2002 HEIDI CRABBE

# Adding a lens

---



scene




lens



film

# Lenses

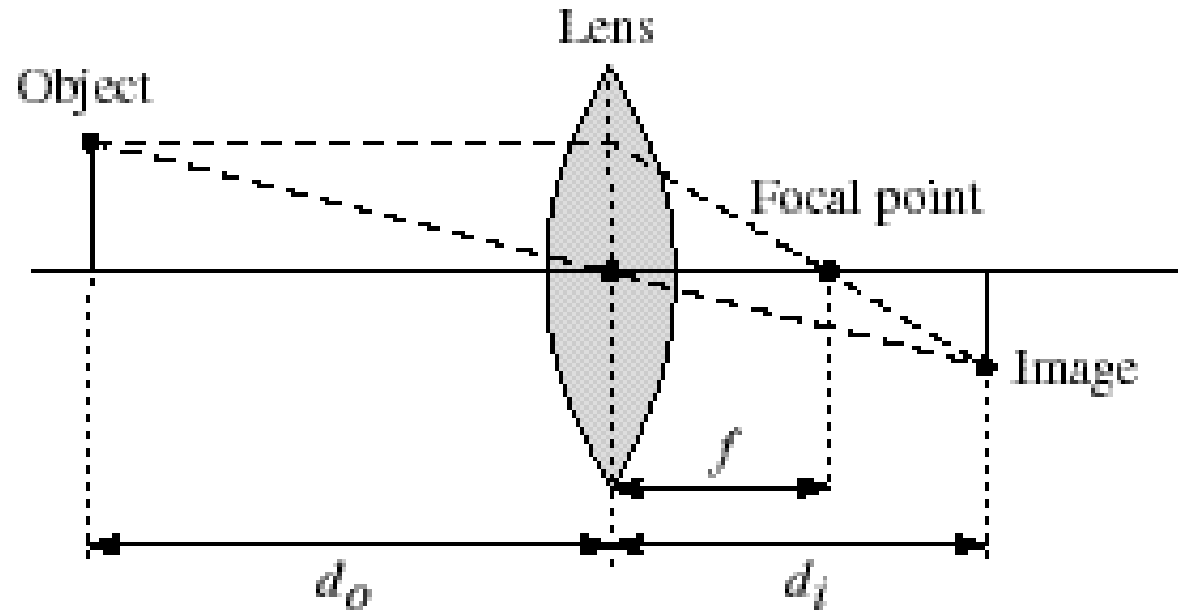


Thin lens equation:  $\frac{1}{d_o} + \frac{1}{d_i} = \frac{1}{f}$



# Thin lens formula


Similar triangles everywhere!  $y'/y = D'/D$

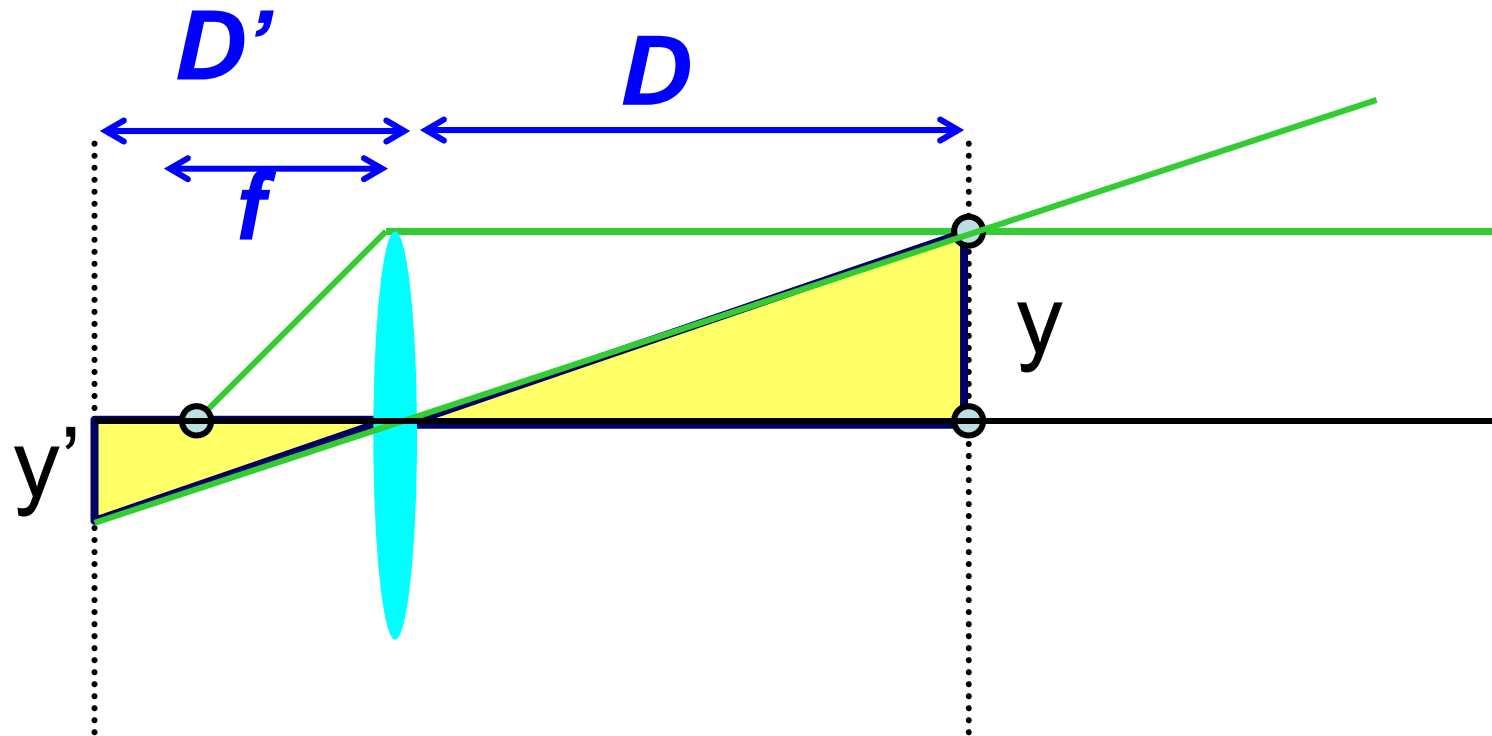

# Thin lens formula

Similar triangles everywhere!  $y'/y = D'/D$


$$y'/y = (D' - f)/f$$

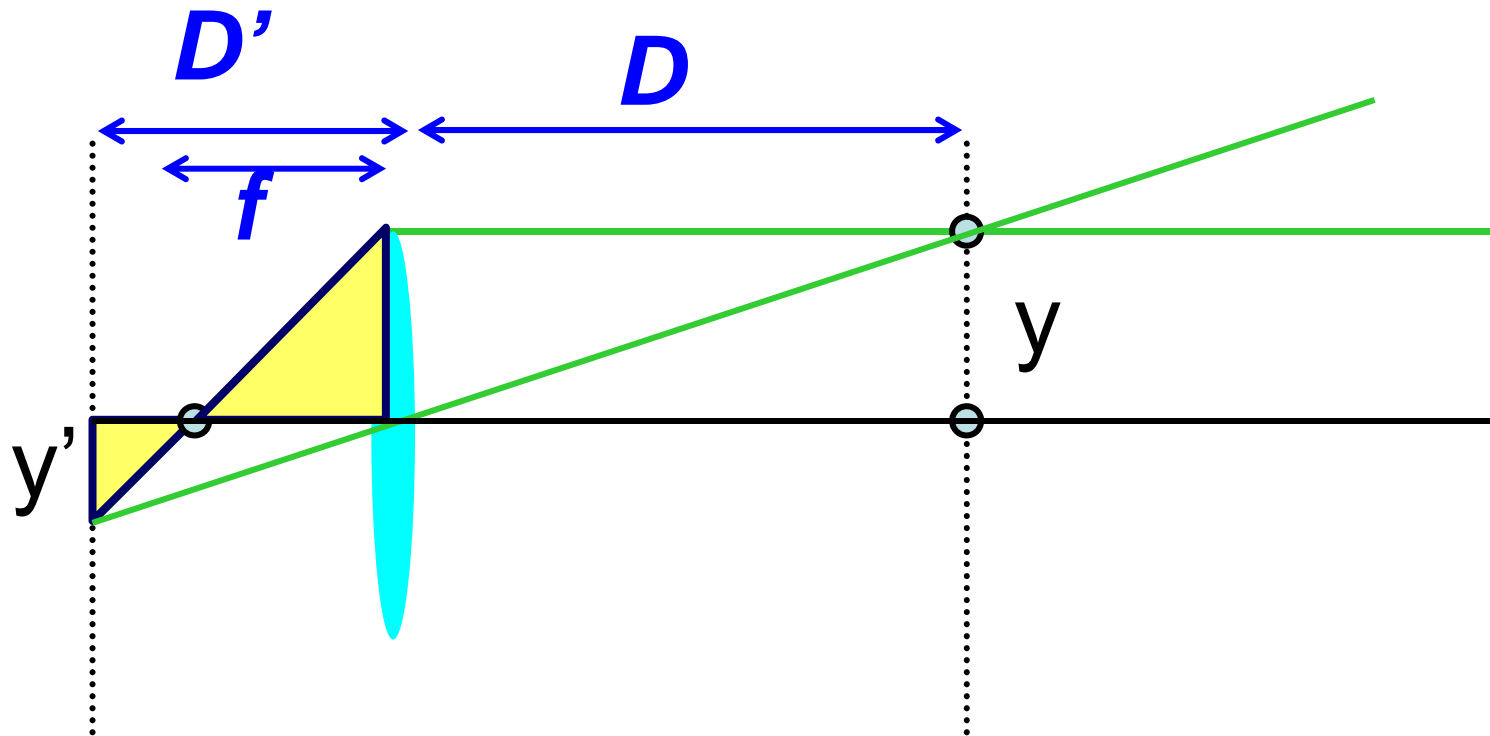

# Thin lens formula


$$\frac{1}{D'} + \frac{1}{D} = \frac{1}{f}$$

The focal length  $f$  determines the lens's ability to bend (refract) light. It is a function of the shape and index of refraction of the lens.

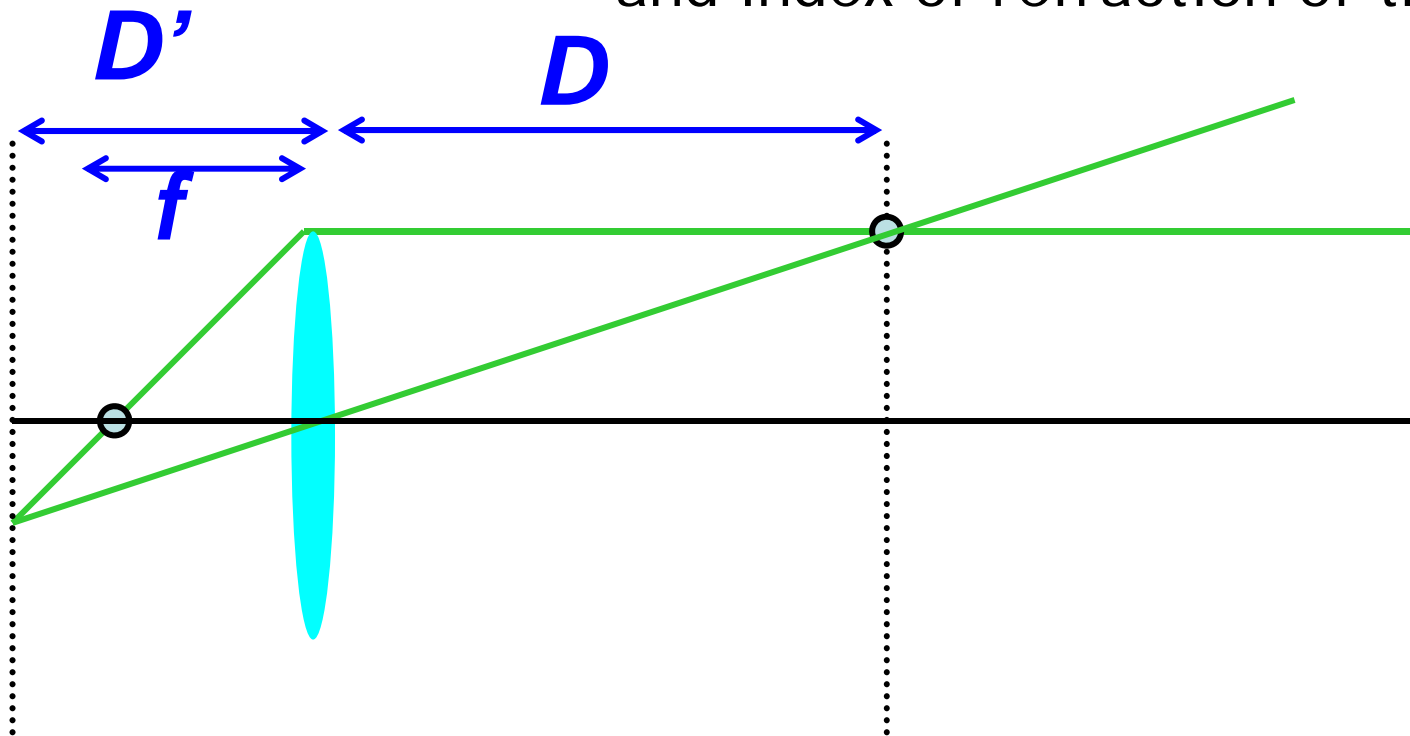

# Adding a lens

---

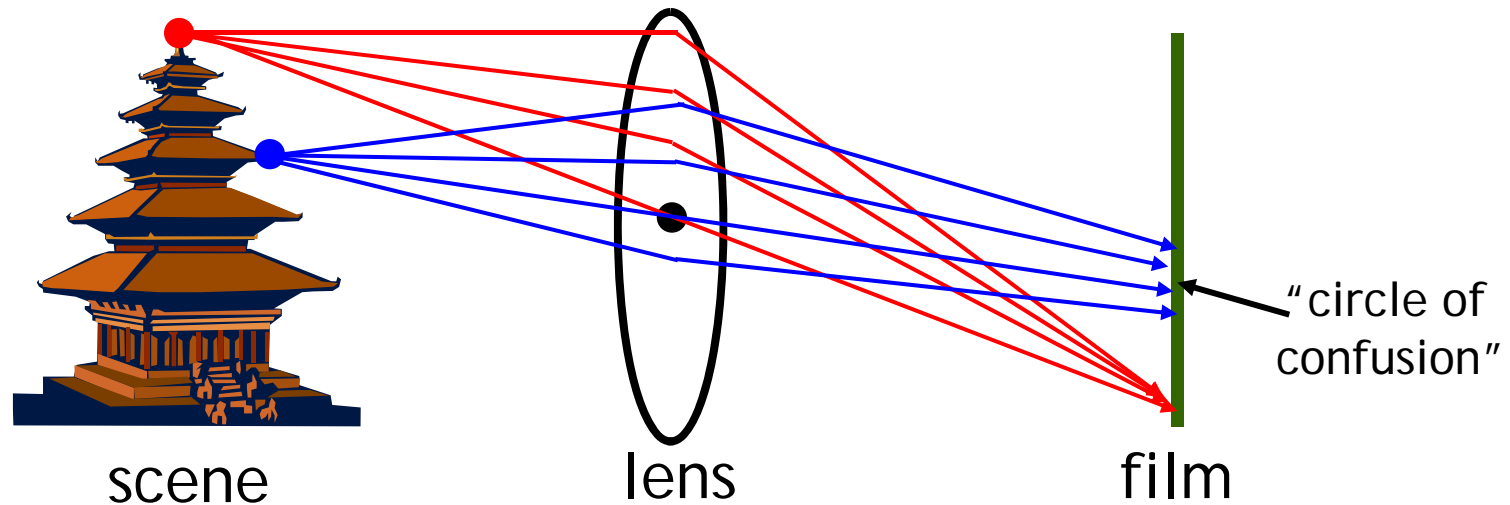

A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
- other points project to a "circle of confusion" in the image

- Thin lens applet:

[http://www.phy.ntnu.edu.tw/java/Lens/lens\\_e.html](http://www.phy.ntnu.edu.tw/java/Lens/lens_e.html)



# Zoom lens

200mm




28mm

Nikon 28-200mm zoom lens.

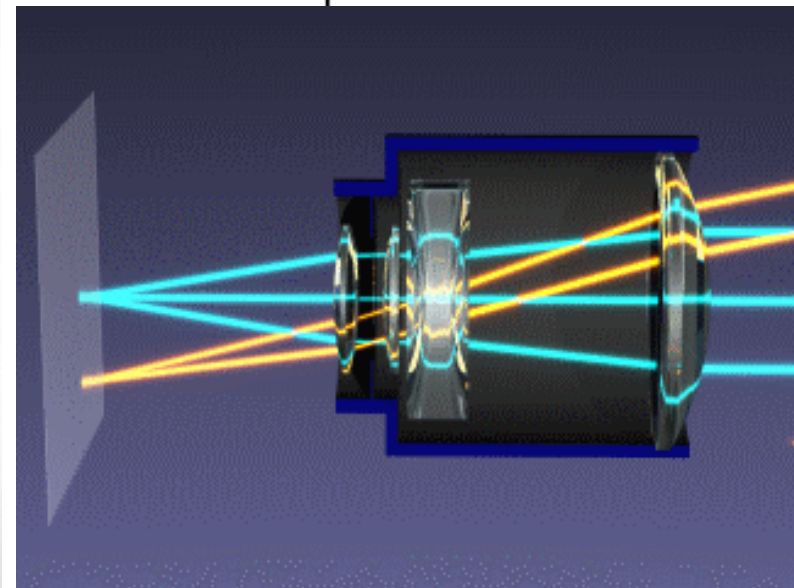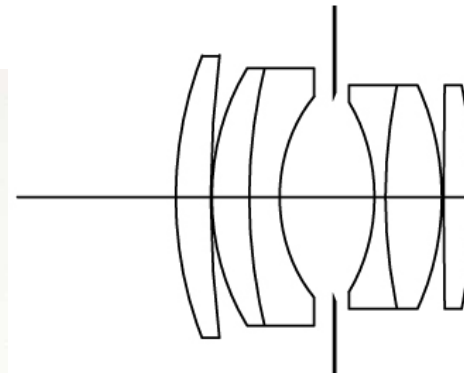

simplified zoom lens  
in operation From wikipedia

# Field of view vs focal length

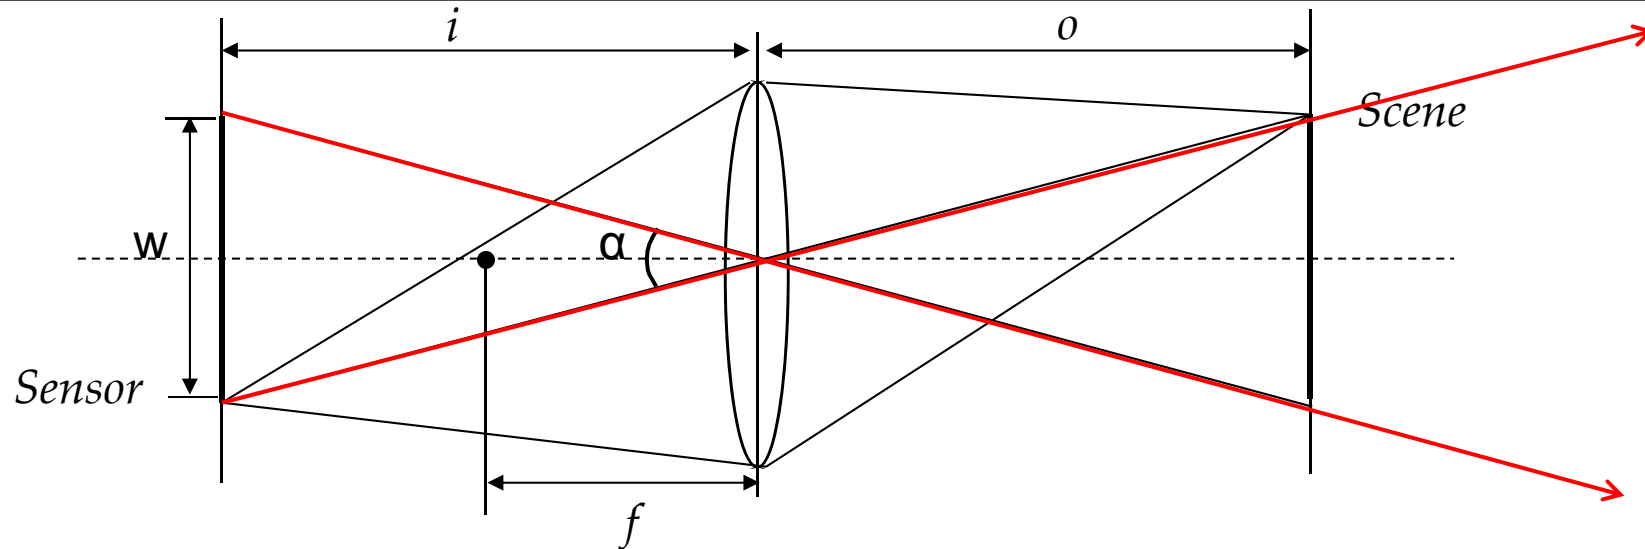


Gaussian Lens Formula: 
$$\frac{1}{i} + \frac{1}{o} = \frac{1}{f}$$


Field of View: 
$$\alpha = 2\arctan(w/(2i)) \approx 2\arctan(w/(2f))$$

Example:  $w = 30\text{mm}, f = 50\text{mm} \Rightarrow \alpha \approx 33.4^\circ$


# Focal length in practice

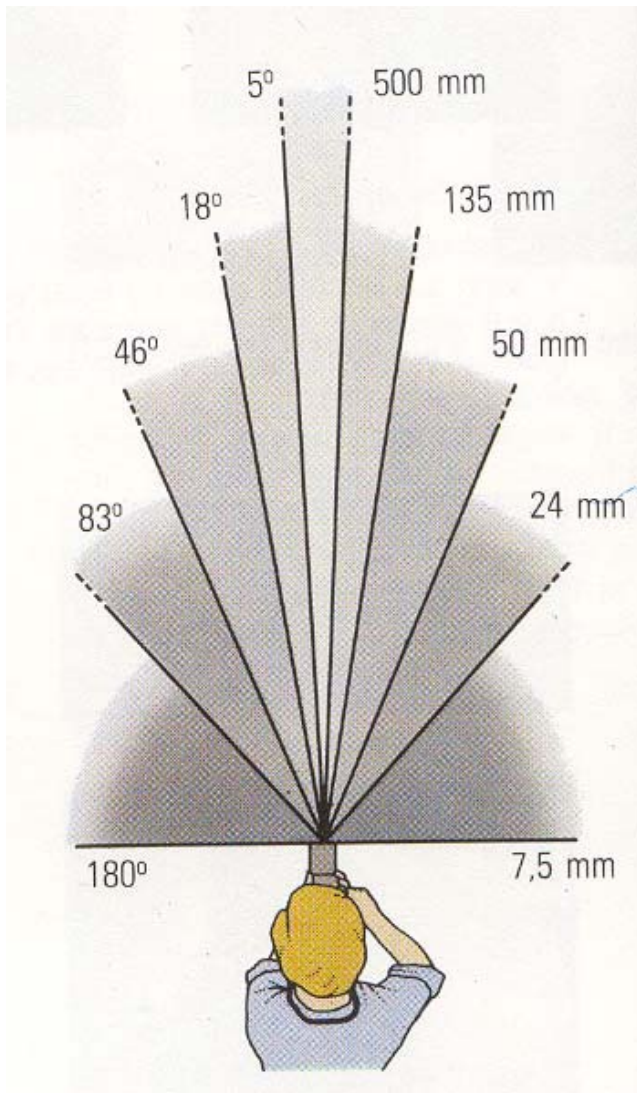


24mm

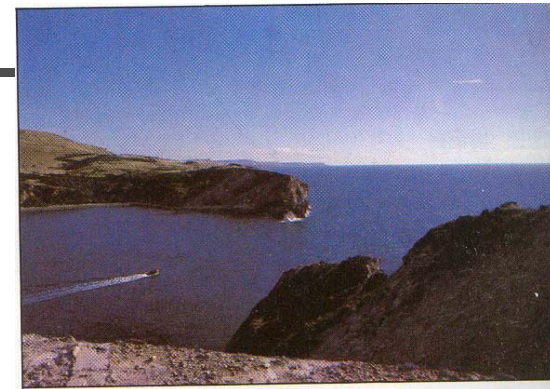


50mm

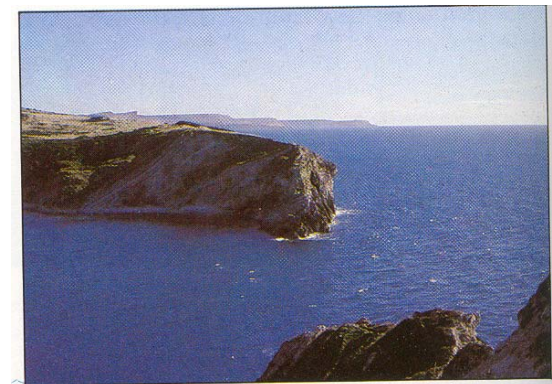

135mm

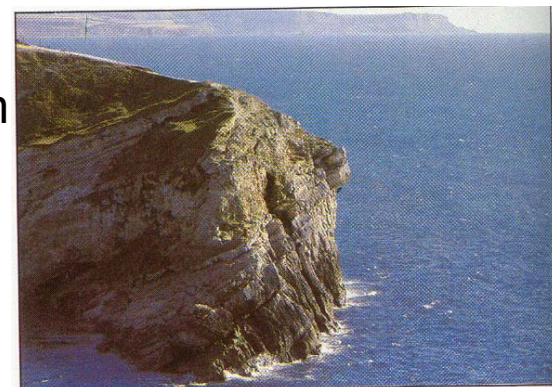

# Distortion

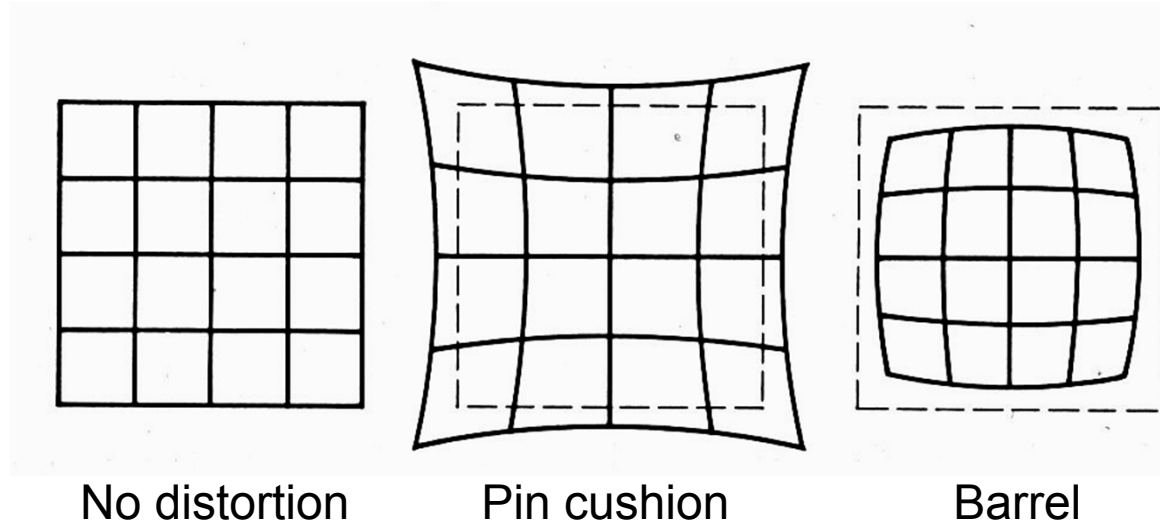

- Radial distortion of the image
  - Caused by imperfect lenses
  - Deviations are most noticeable for rays that pass through the edge of the lens





# Correcting radial distortion

---





from [Helmut Dersch](#)

# Vignetting

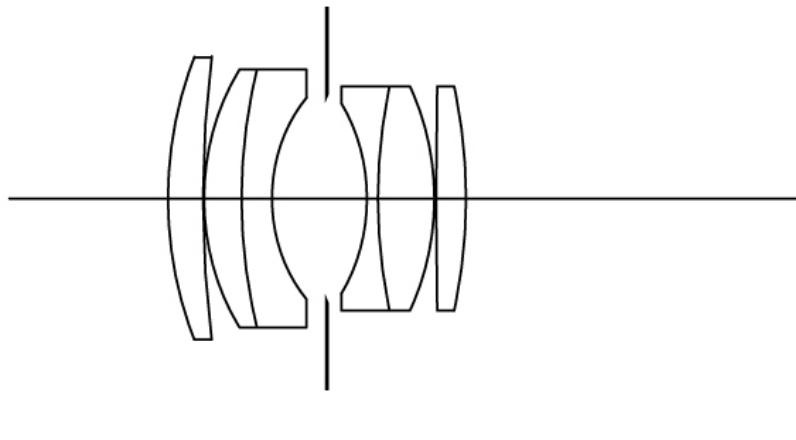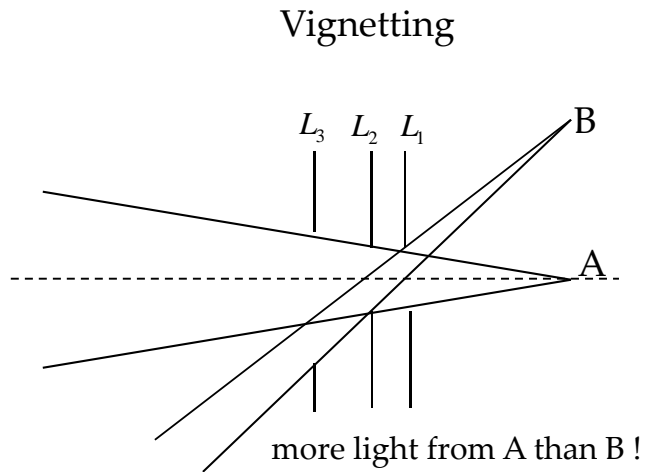

# Vignetting

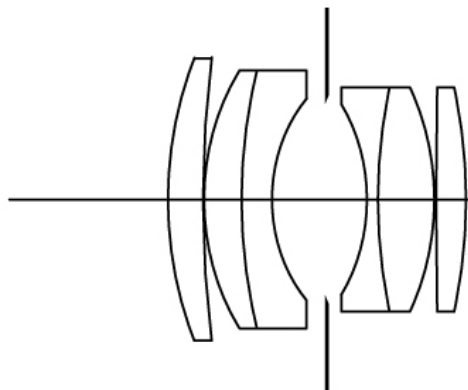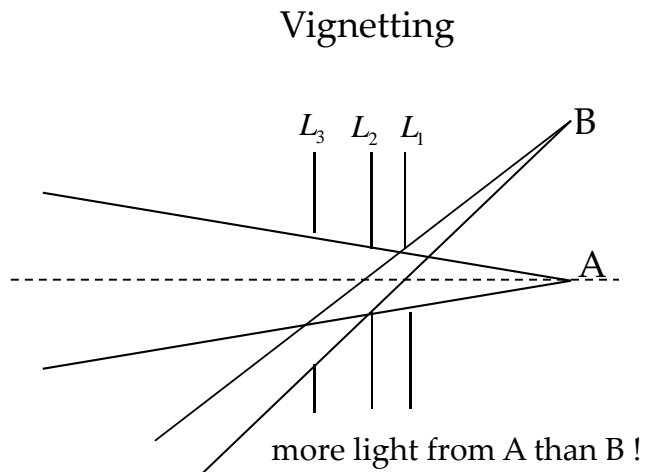

original




corrected


Goldman & Chen ICCV 2005

Slides from Li Zhang

# Chromatic Aberration

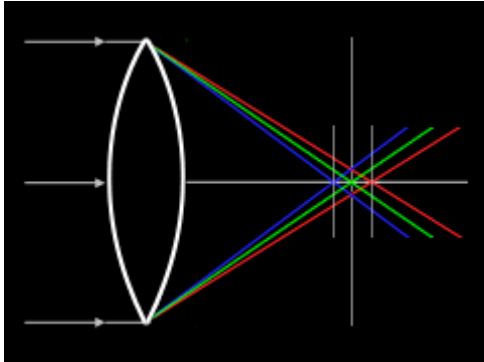

Lens has different refractive indices for different wavelengths.

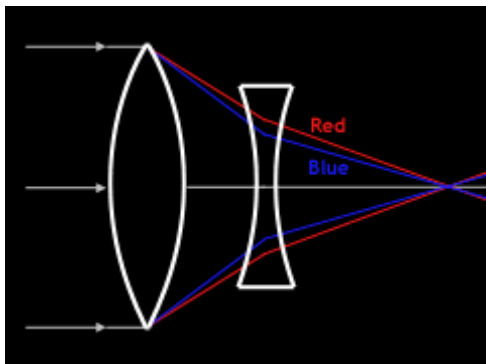


Special lens systems using two or more pieces of glass with different refractive indexes can reduce or eliminate this problem.



[http://www.dpreview.com/learn/?/Glossary/Optical/chromatic\\_aberration\\_01.htm](http://www.dpreview.com/learn/?/Glossary/Optical/chromatic_aberration_01.htm)

# Exposure = aperture + shutter speed

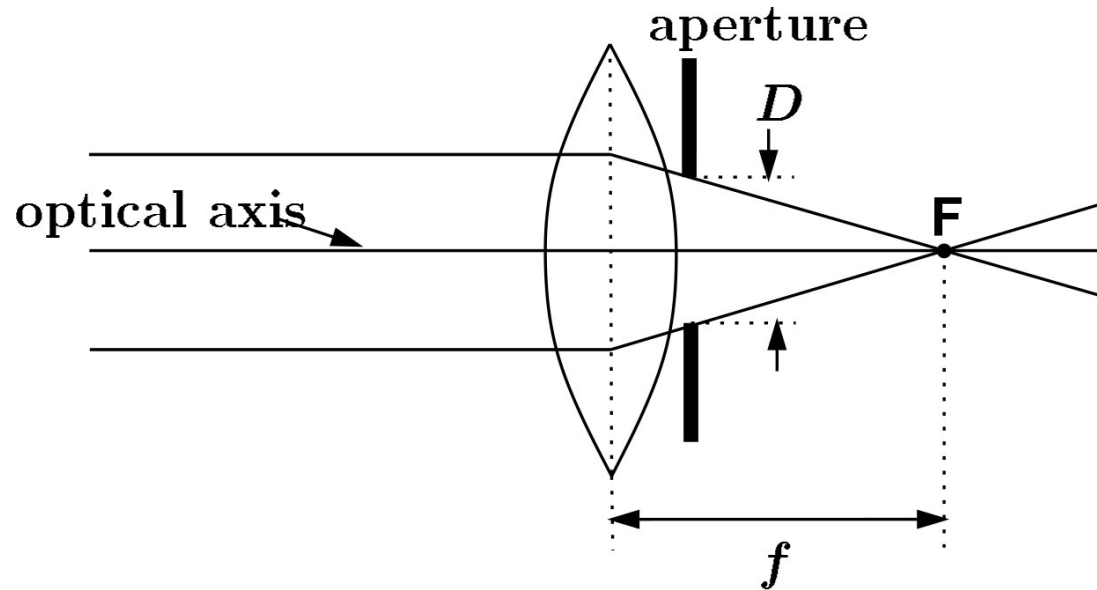


- Aperture of diameter  $D$  restricts the range of rays (aperture may be on either side of the lens)
- Shutter speed is the amount of time that light is allowed to pass through the aperture

# Exposure


- Two main parameters:
  - Aperture (in f stop)



Full aperture



Medium aperture




Stopped down


- Shutter speed (in fraction of a second)




Blade (closing)



Blade (open)

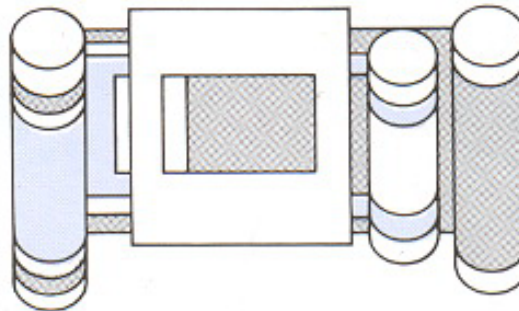

Focal plane (closed)

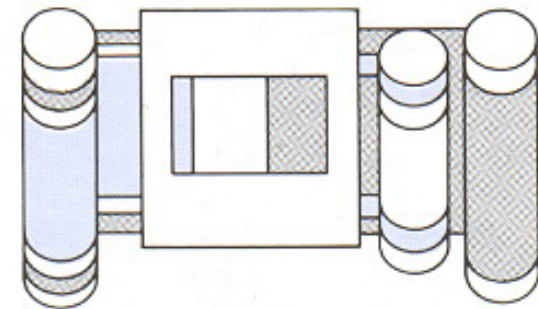

Focal plane (open)


# Effects of shutter speeds

- Slower shutter speed => more light, but more motion blur

Slow shutter speed



Fast shutter speed

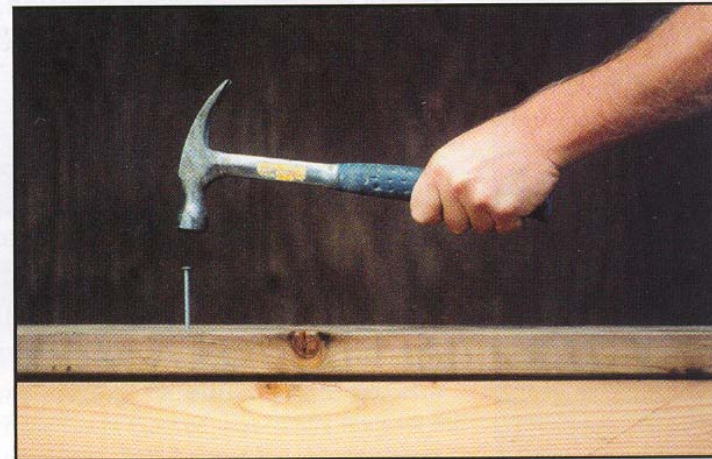

- Faster shutter speed freezes motion

From Photography, London et al.

Walking people



1/125

Running people



1/250

Car



1/500

Fast train



1/1000

# Aperture

- Aperture is the diameter of the lens opening, usually specified by f-stop,  $f/D$ , a fraction of the focal length.
  - $f/2.0$  on a 50mm means that the aperture is 25mm
  - $f/2.0$  on a 100mm means that the aperture is 50mm
- When a change in f-stop occurs, the light is either doubled or cut in half.
- Lower f-stop, more light (larger lens opening)
- Higher f-stop, less light (smaller lens opening)






# Depth of field


---

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus

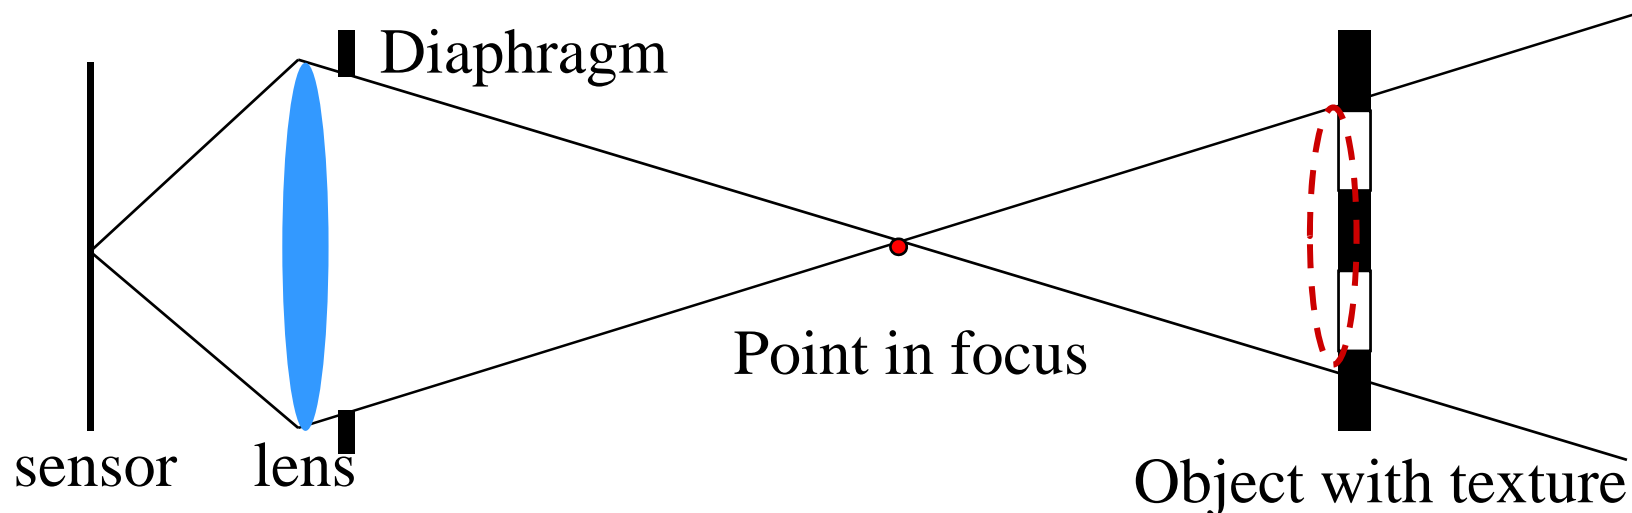


# Depth of field

Changing the aperture size affects depth of field. A smaller aperture increases the range in which the object is approximately in focus

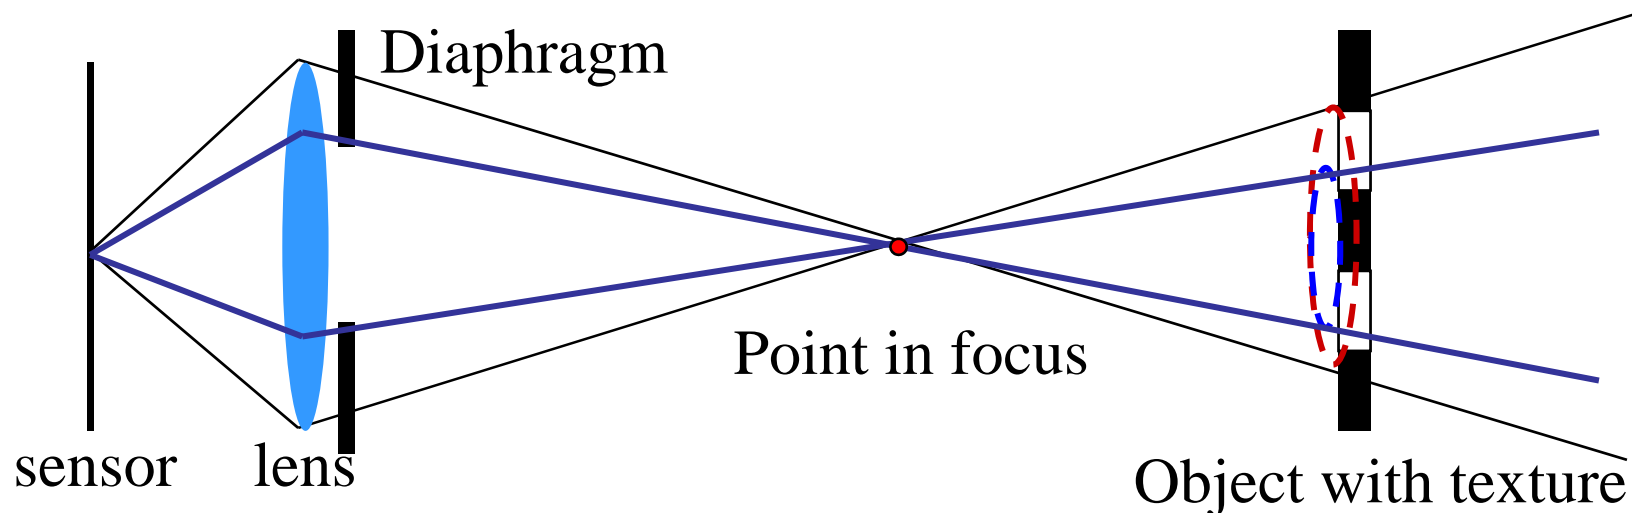

# Depth of field

LESS DEPTH OF FIELD

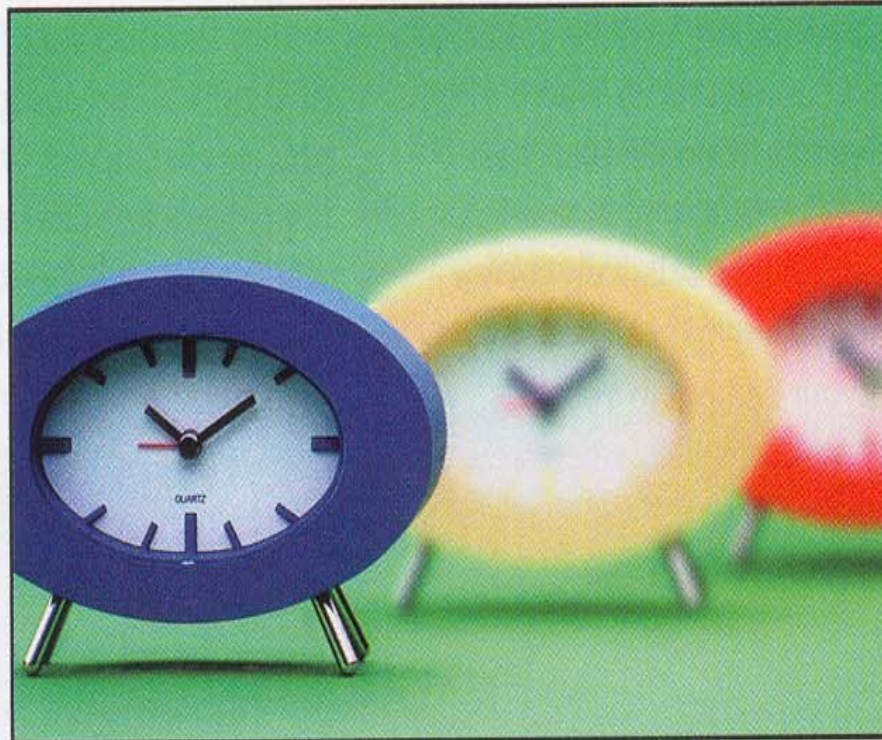

Wider aperture



MORE DEPTH OF FIELD





Smaller aperture



# Exposure

---

- Two main parameters:
  - Aperture (in f stop)
  - Shutter speed (in fraction of a second)
- Reciprocity
  - The same exposure is obtained with an exposure twice as long and an aperture *area* half as big
  - Hence square root of two progression of f stops vs. power of two progression of shutter speed
  - Reciprocity can fail for very long exposures

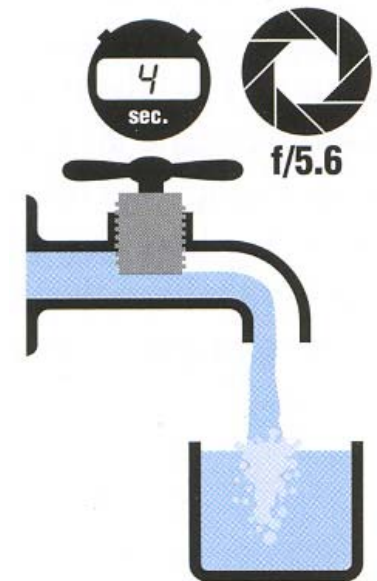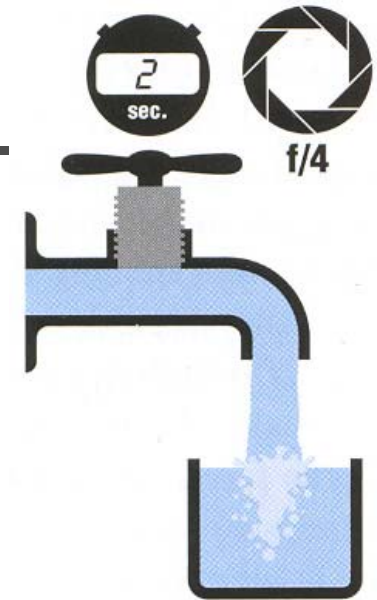


From Photography, London et al.

# Reciprocity

---

- Assume we know how much light we need
- We have the choice of an infinity of shutter speed/aperture pairs

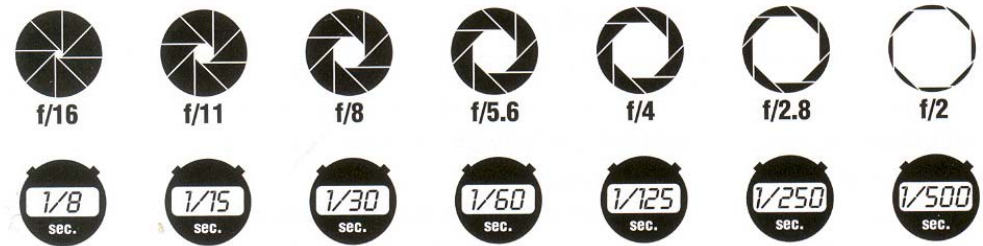

- What will guide our choice of a shutter speed?
  - Freeze motion vs. motion blur, camera shake
- What will guide our choice of an aperture?
  - Depth of field, diffraction limit
- Often we must compromise
  - Open more to enable faster speed (but shallow DoF)

# Exposure & metering

---

- The camera metering system measures how bright the scene is
- In Aperture priority mode, the photographer sets the aperture, the camera sets the shutter speed
- In Shutter-speed priority mode, photographers sets the shutter speed and the camera deduces the aperture
- In Program mode, the camera decides both exposure and shutter speed (middle value more or less)
- In Manual mode, the user decides everything (but can get feedback)


# Pros and cons of various modes

---

- Aperture priority
  - Direct depth of field control
  - Cons: can require impossible shutter speed (e.g. with f/1.4 for a bright scene)
- Shutter speed priority
  - Direct motion blur control
  - Cons: can require impossible aperture (e.g. when requesting a 1/1000 speed for a dark scene)
    - Note that aperture is somewhat more restricted
- Program
  - Almost no control, but no need for neurons
- Manual
  - Full control, but takes more time and thinking

# Sensitivity (ISO)

- Third variable for exposure
- Linear effect (200 ISO needs half the light as 100 ISO)
- Film photography: trade sensitivity for grain

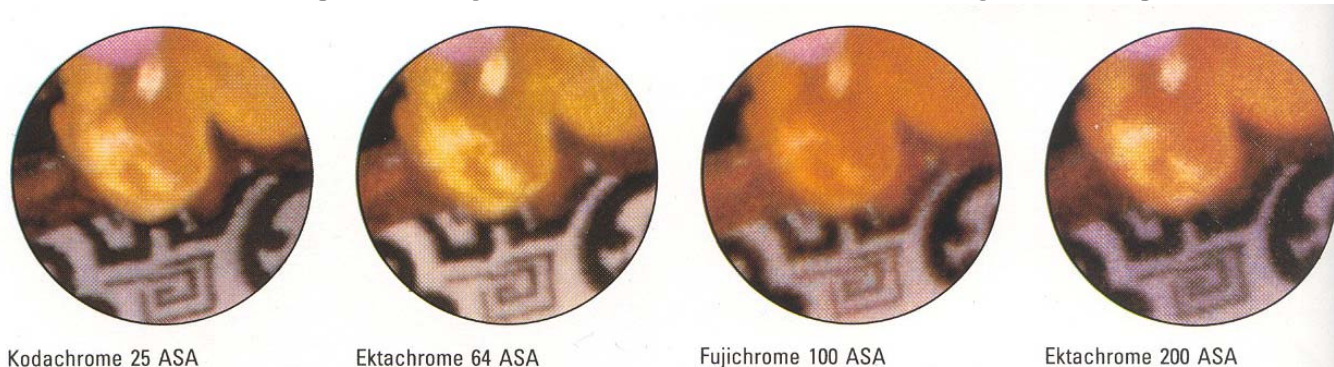

Kodachrome 25 ASA


Ektachrome 64 ASA

Fujichrome 100 ASA

Ektachrome 200 ASA


- Digital photography: trade sensitivity for noise

From dpreview.com

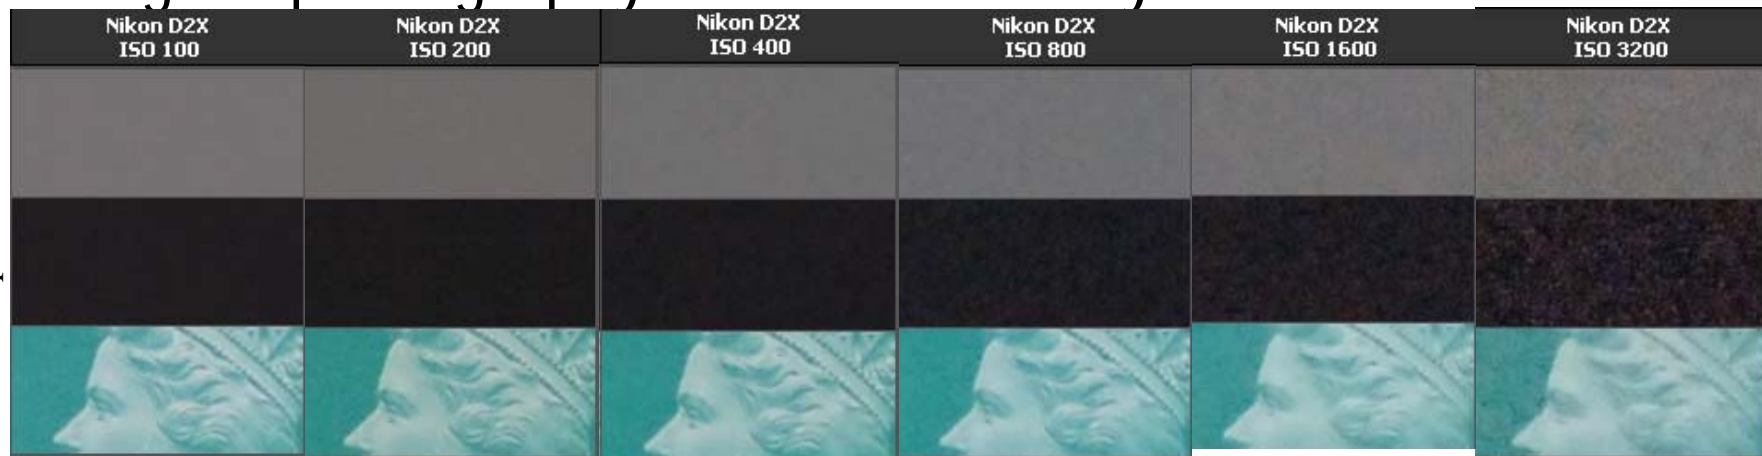



# Summary in a picture

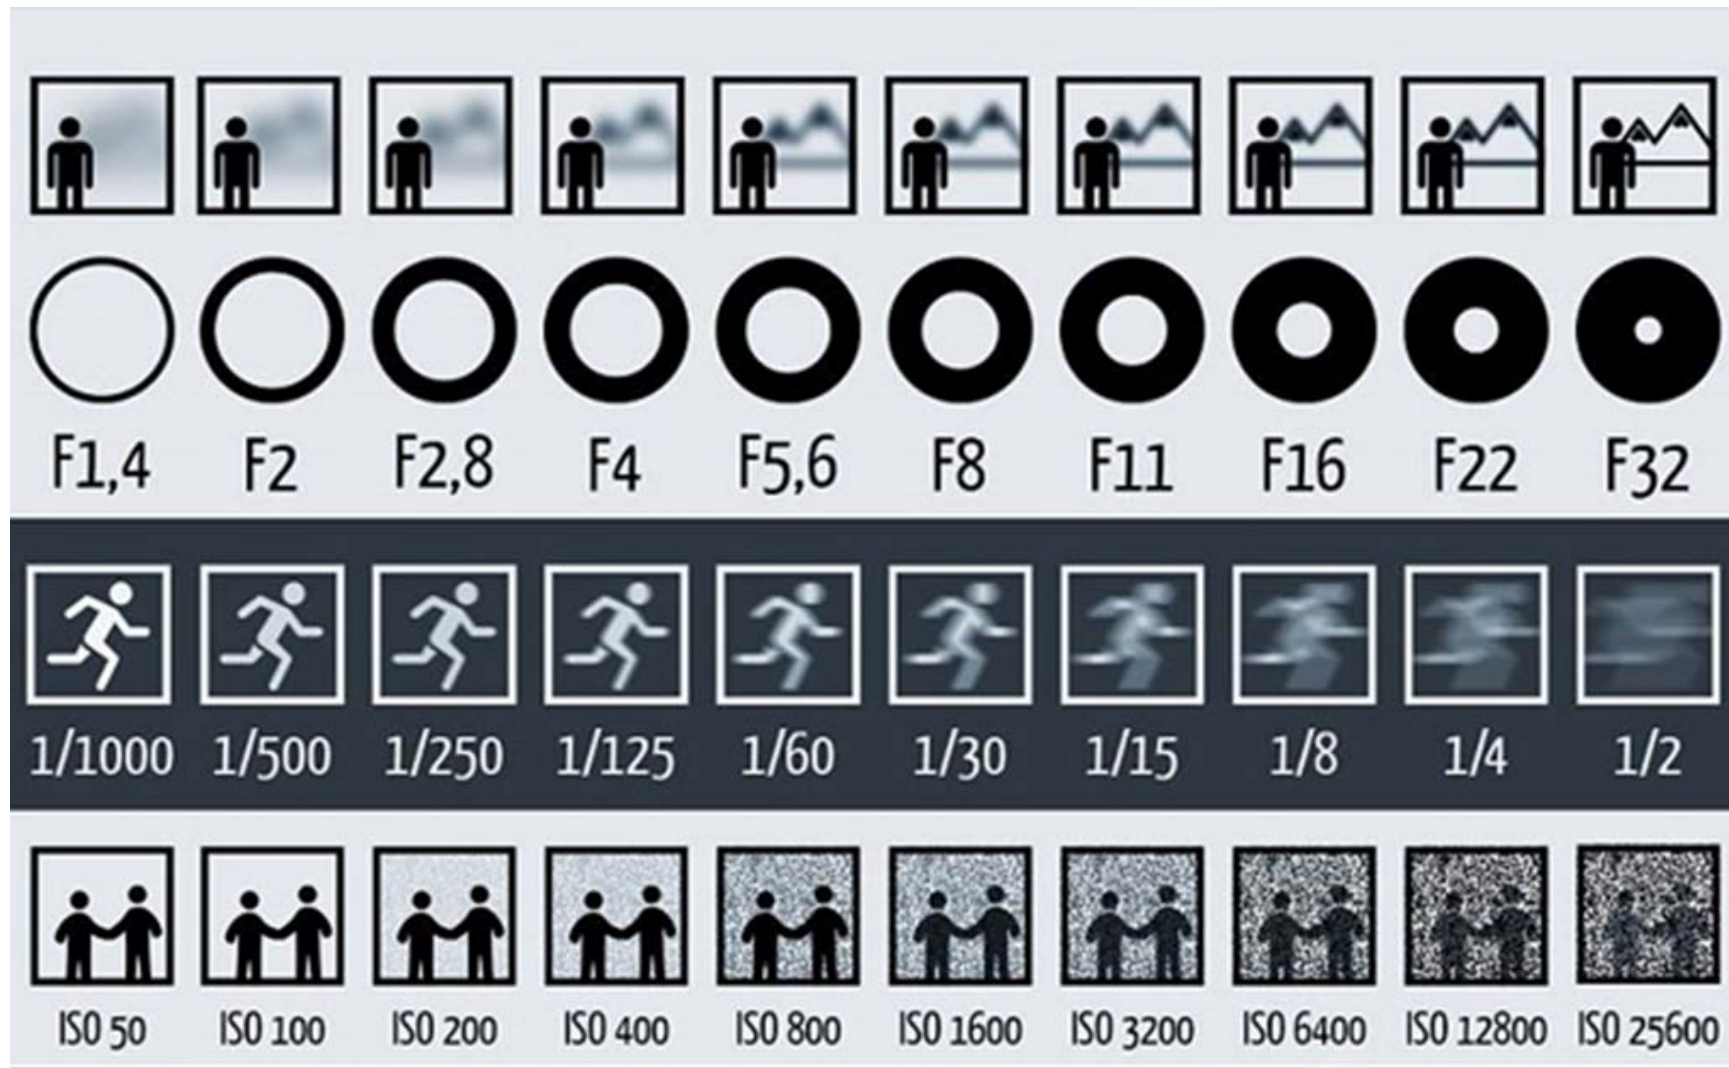

# Demo




---

See <http://www.photonhead.com/simcam/>


# Film camera

---

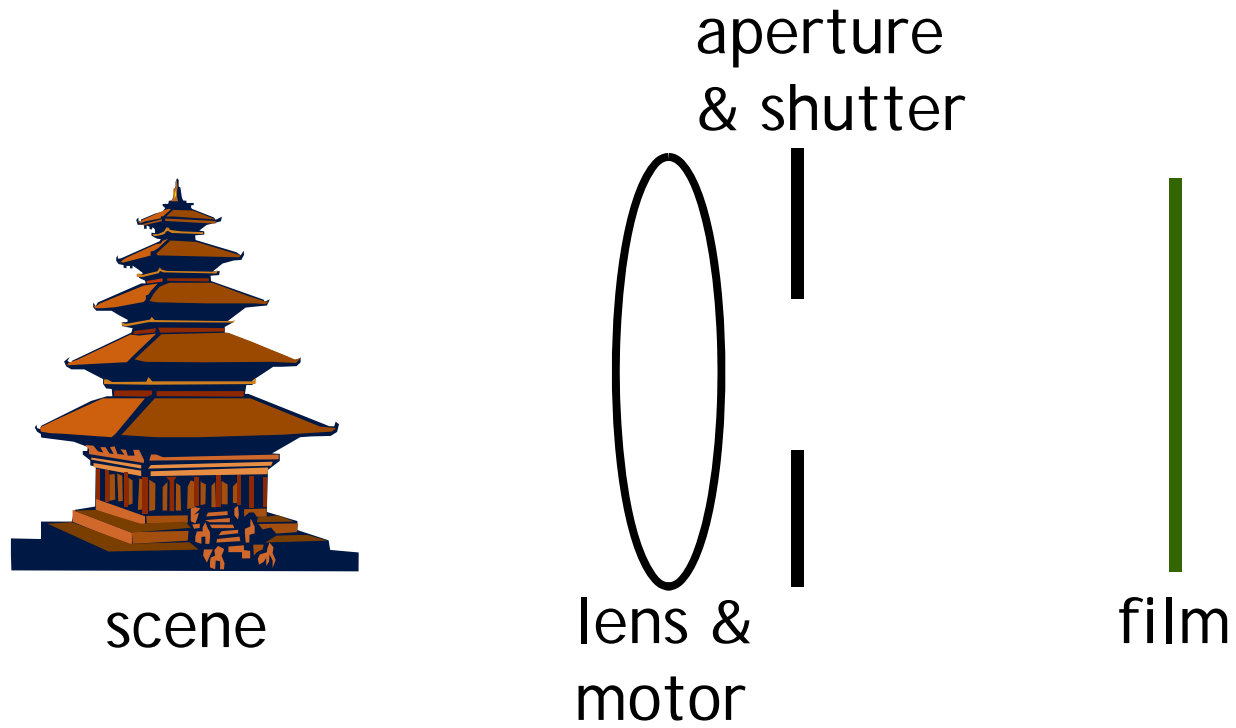

# Digital camera

---

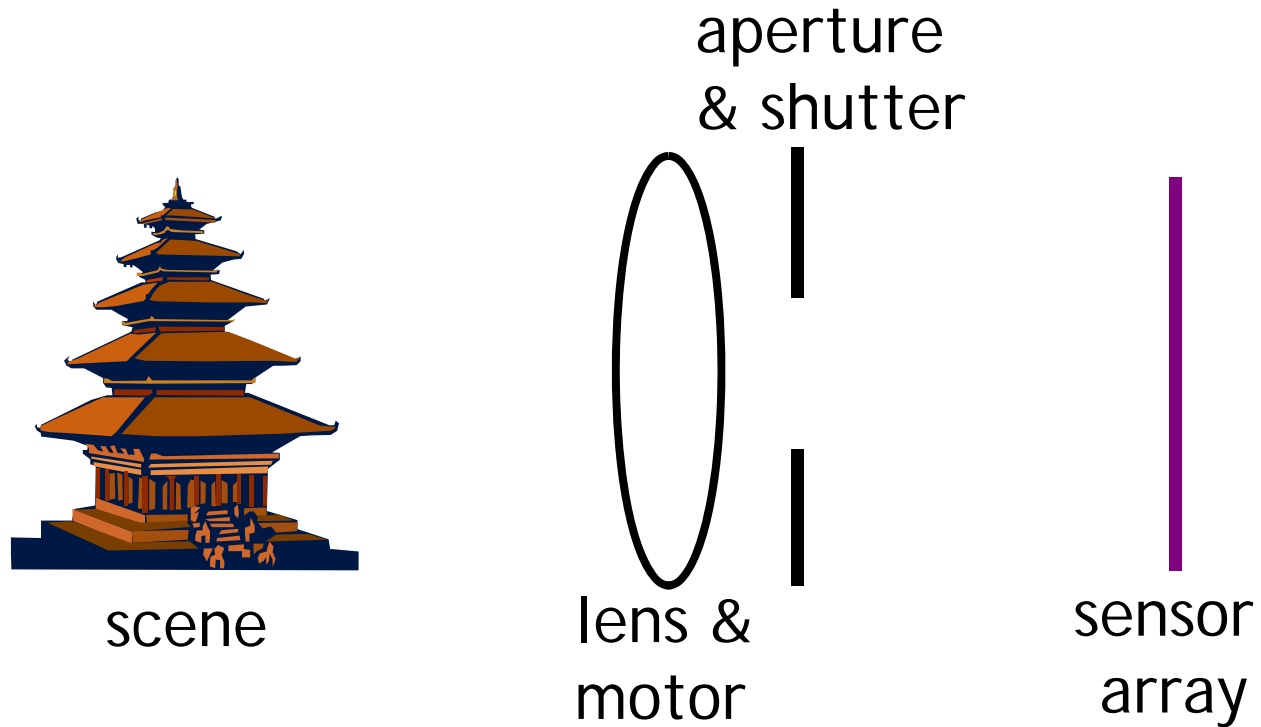


- A digital camera replaces film with a sensor array
- Each cell in the array is a light-sensitive diode that converts photons to electrons


# CCD v.s. CMOS

---

- CCD is less susceptible to noise (special process, higher fill factor)
- CMOS is more flexible, less expensive (standard process), less power consumption

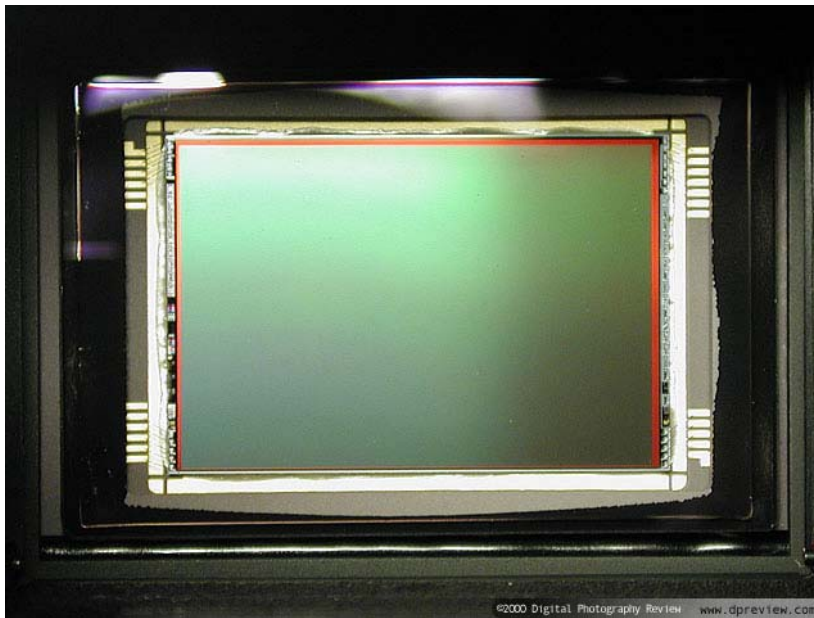


CCD

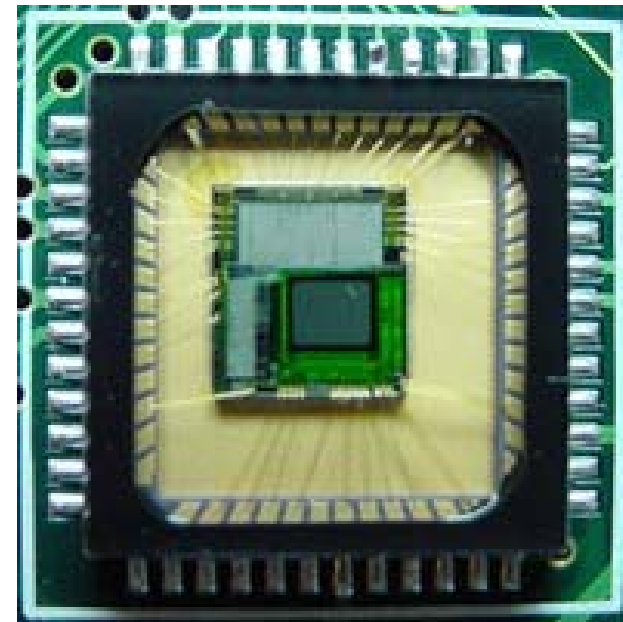



CMOS

# Sensor noise

- Blooming
- Diffusion
- Dark current
- Photon shot noise
- Amplifier readout noise

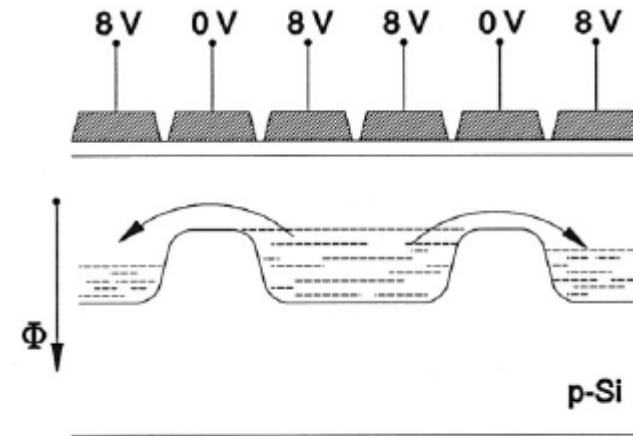

Blooming

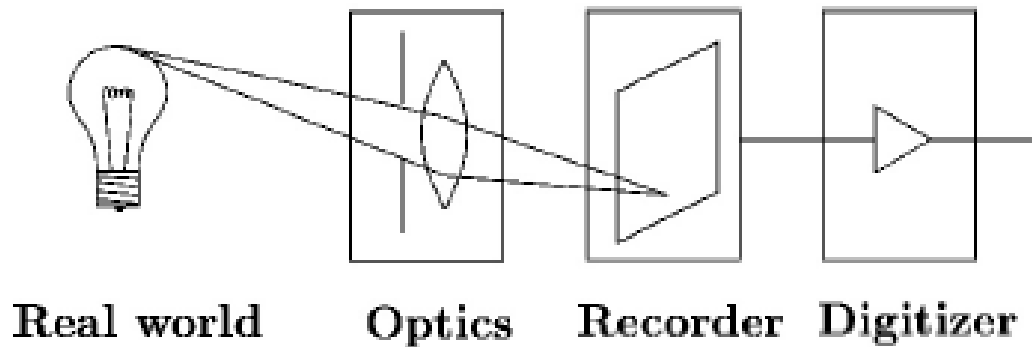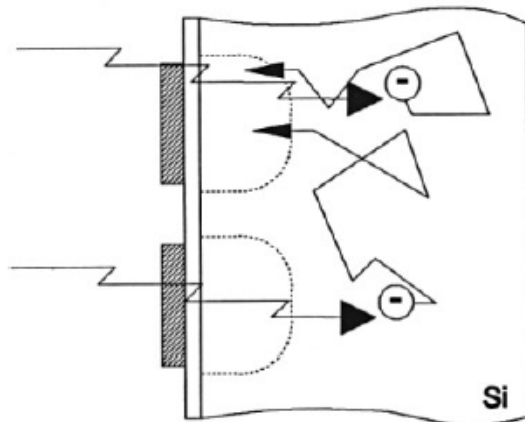


# SLR (Single-Lens Reflex)

---

- Reflex (R in SLR) means that we see through the same lens used to take the image.
- Not the case for compact cameras



# SLR view finder

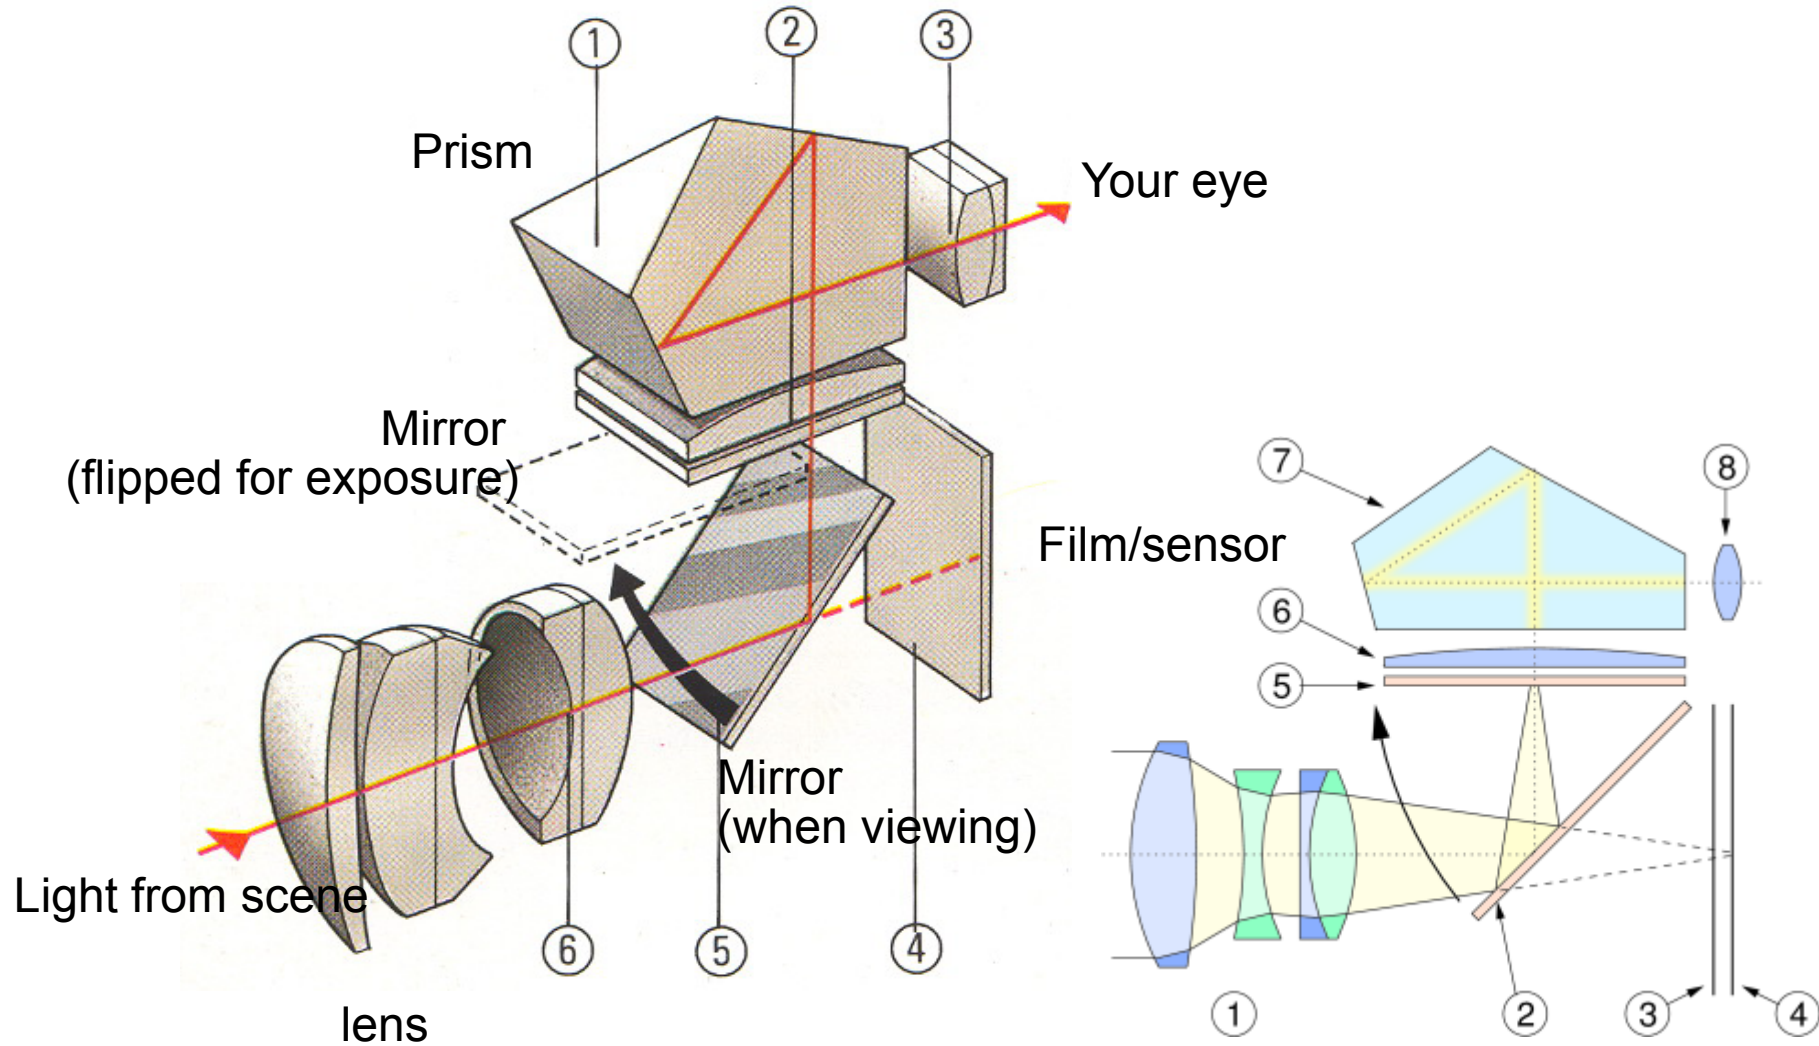



# Color


---

So far, we've only talked about monochrome sensors. Color imaging has been implemented in a number of ways:

- Field sequential
- Multi-chip
- Color filter array
- X3 sensor


# Field sequential

---

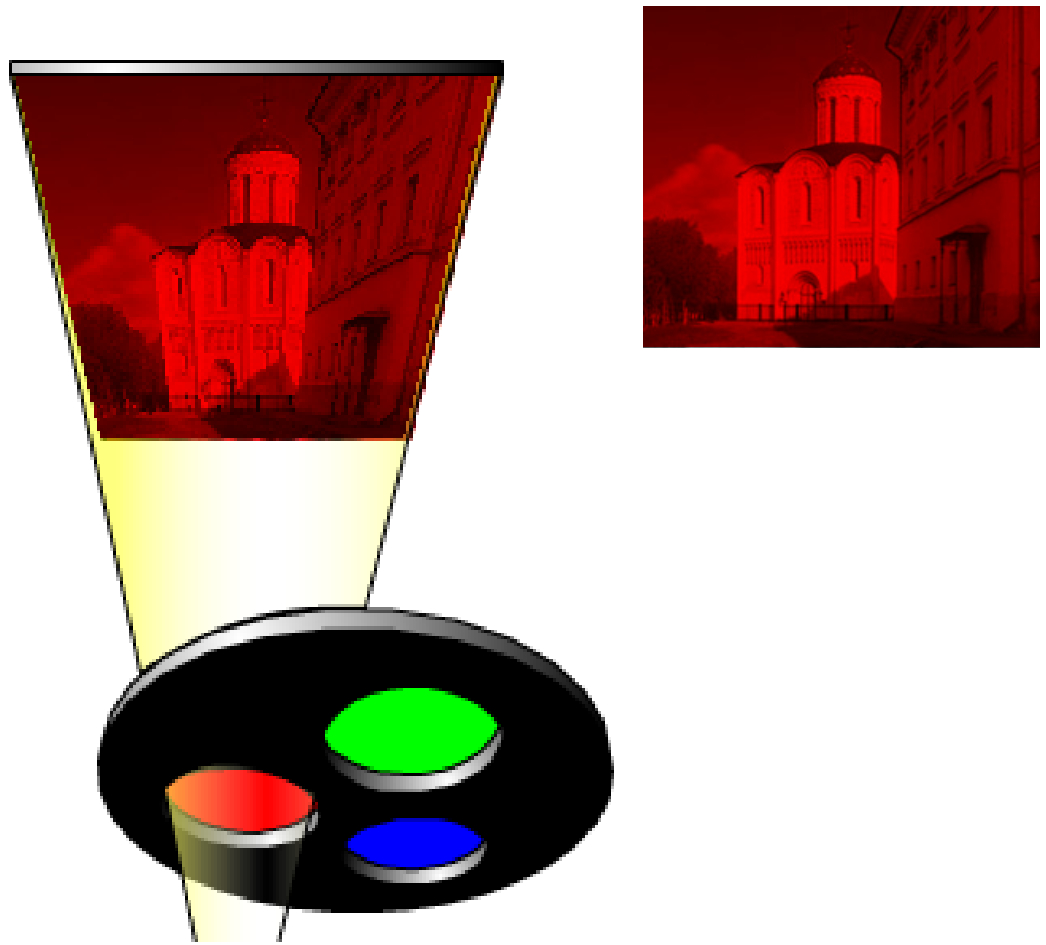


# Field sequential


---

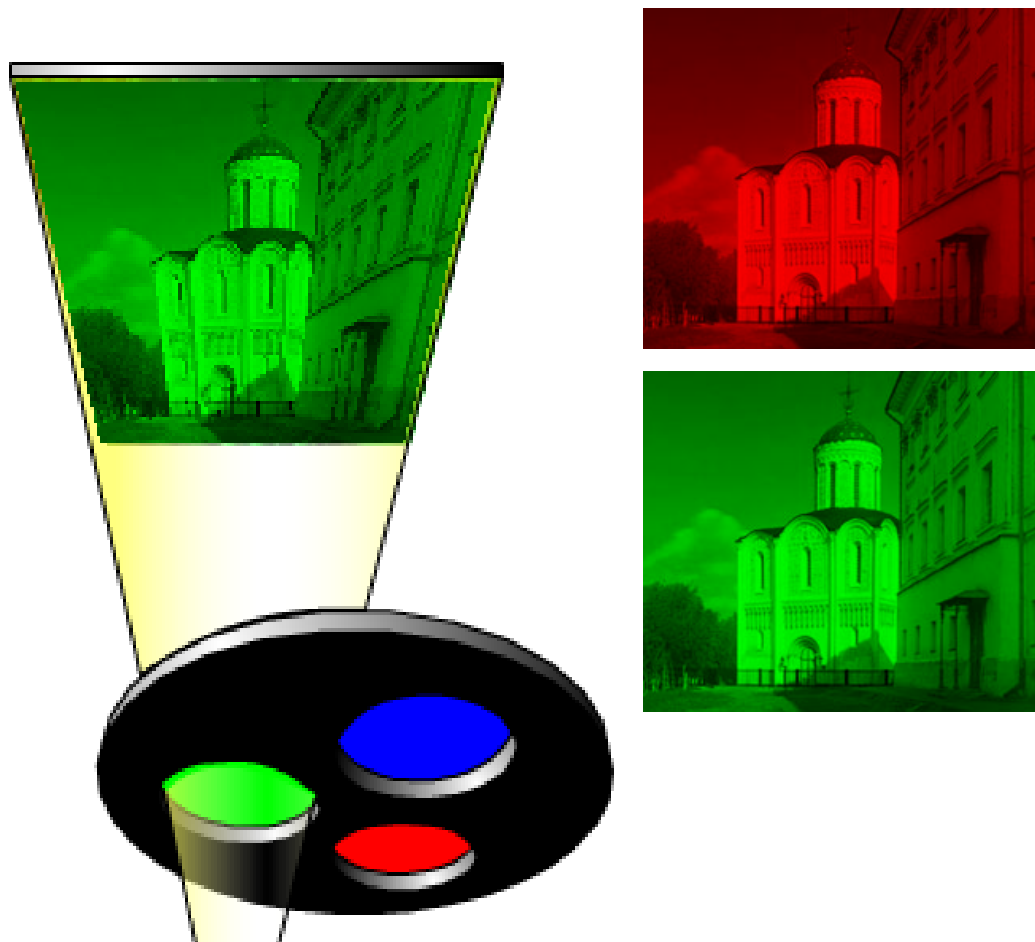

# Field sequential

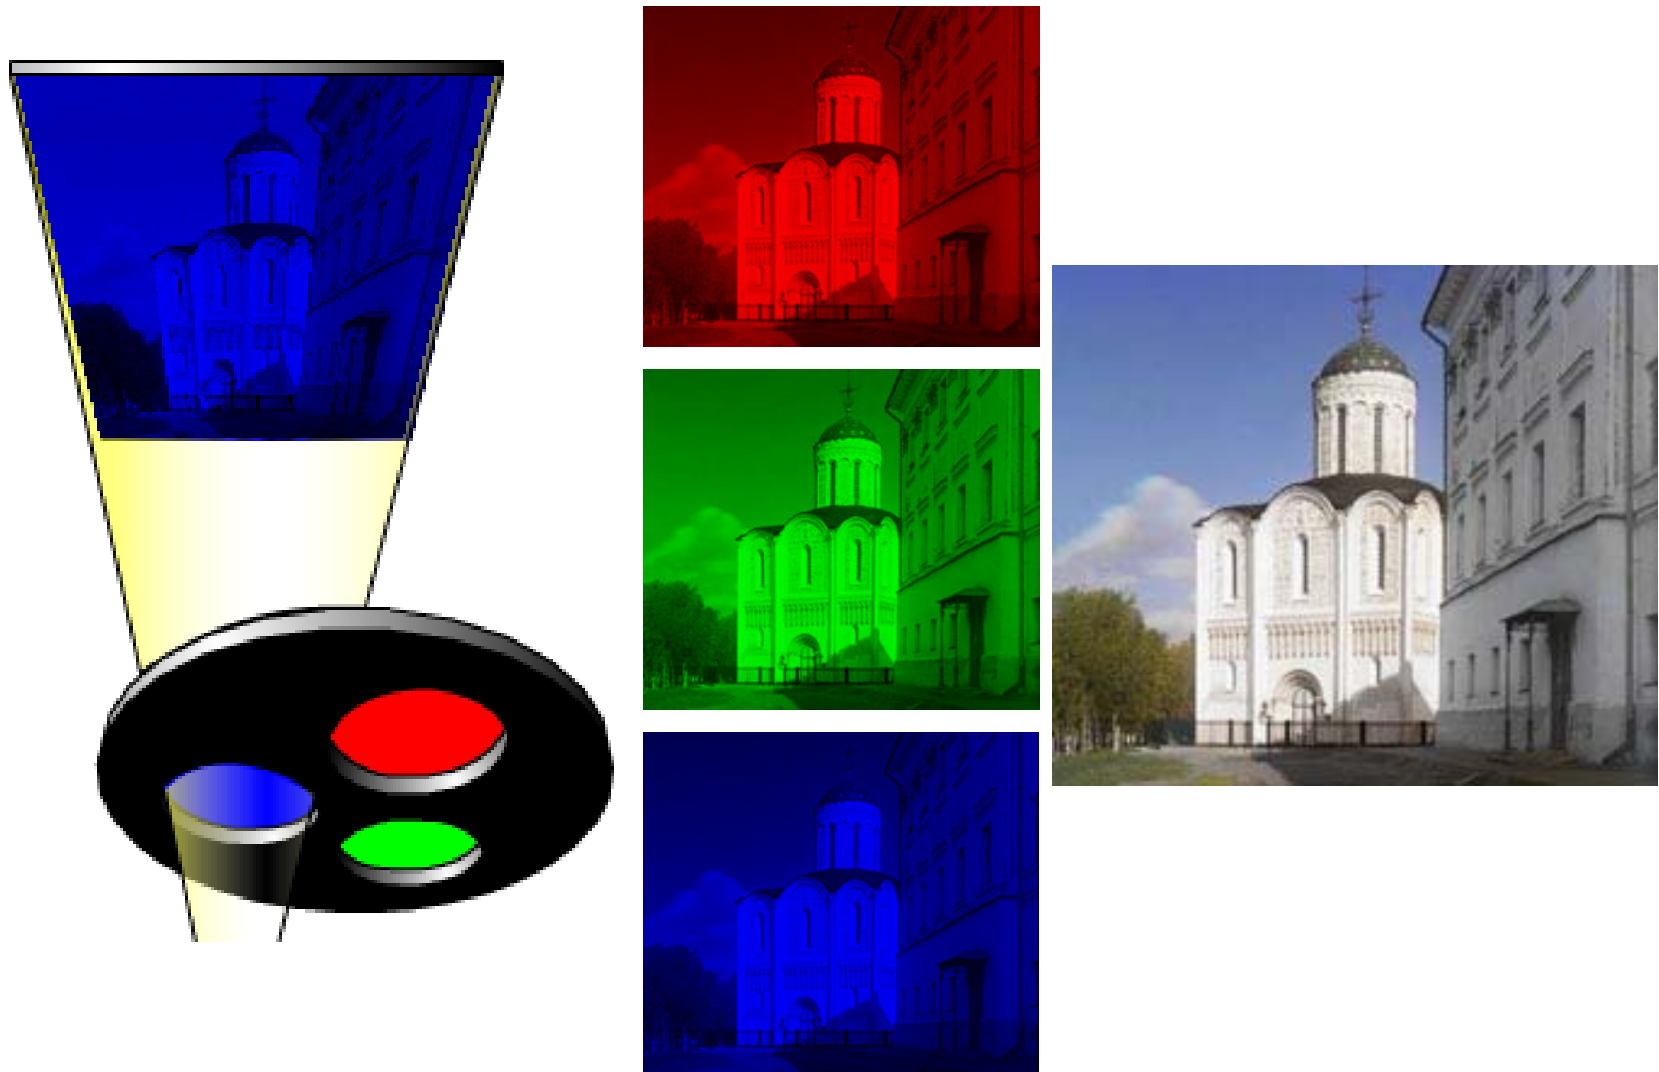

# Prokudin-Gorskii (early 1900's)

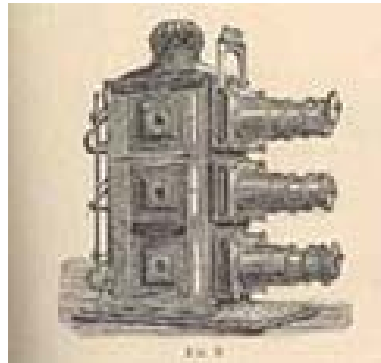

Lantern projector




<http://www.loc.gov/exhibits/empire/>

# Prokudin-Gorskii (early 1900's)




# Multi-chip

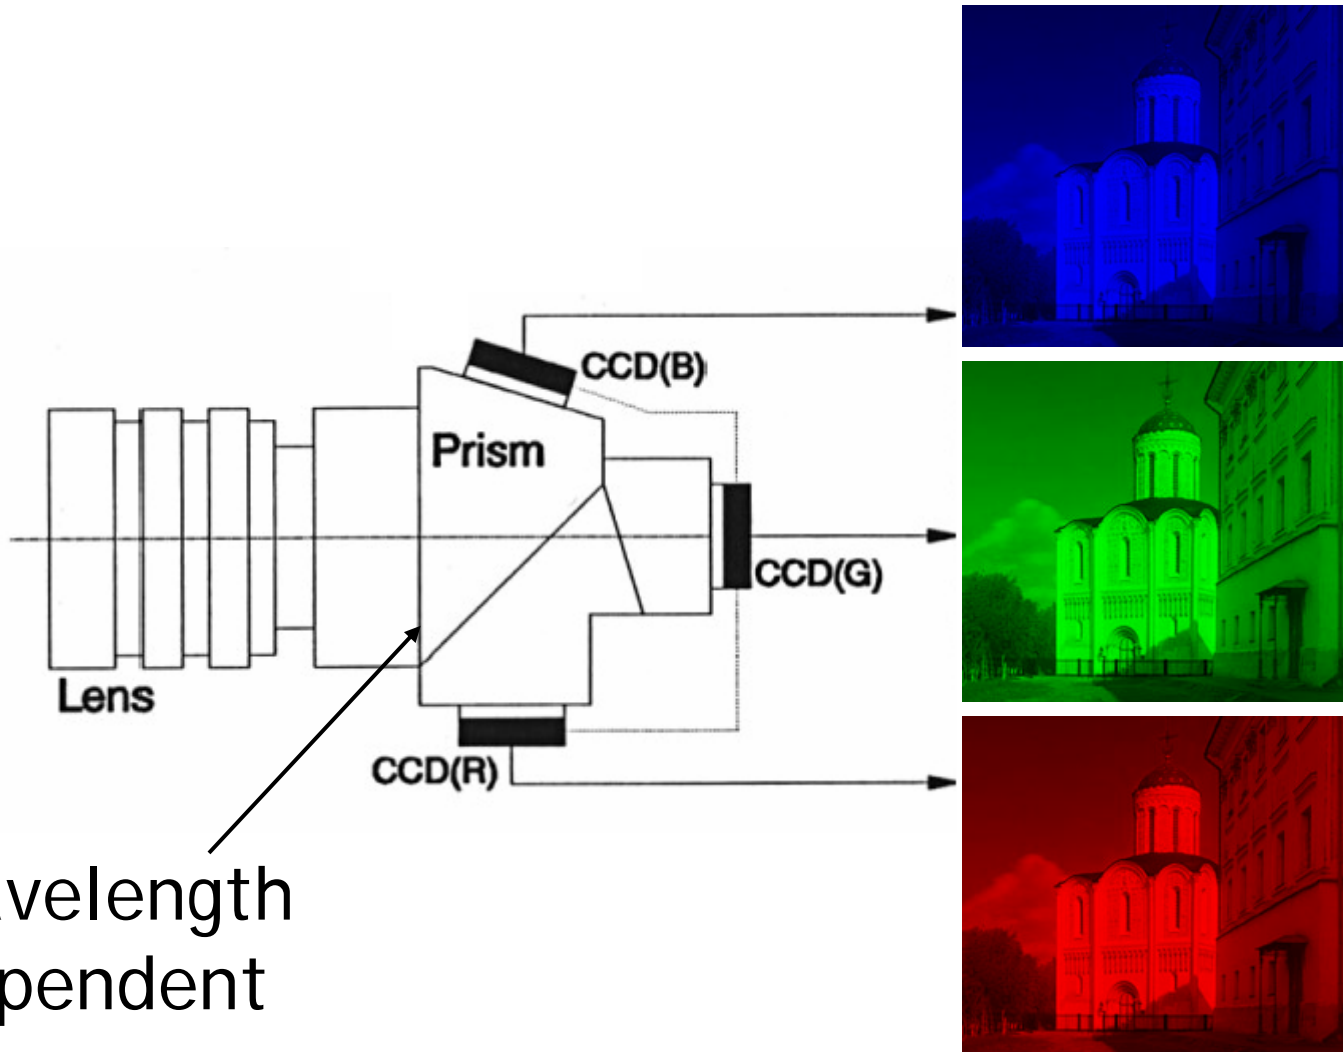

wavelength  
dependent

# Embedded color filters

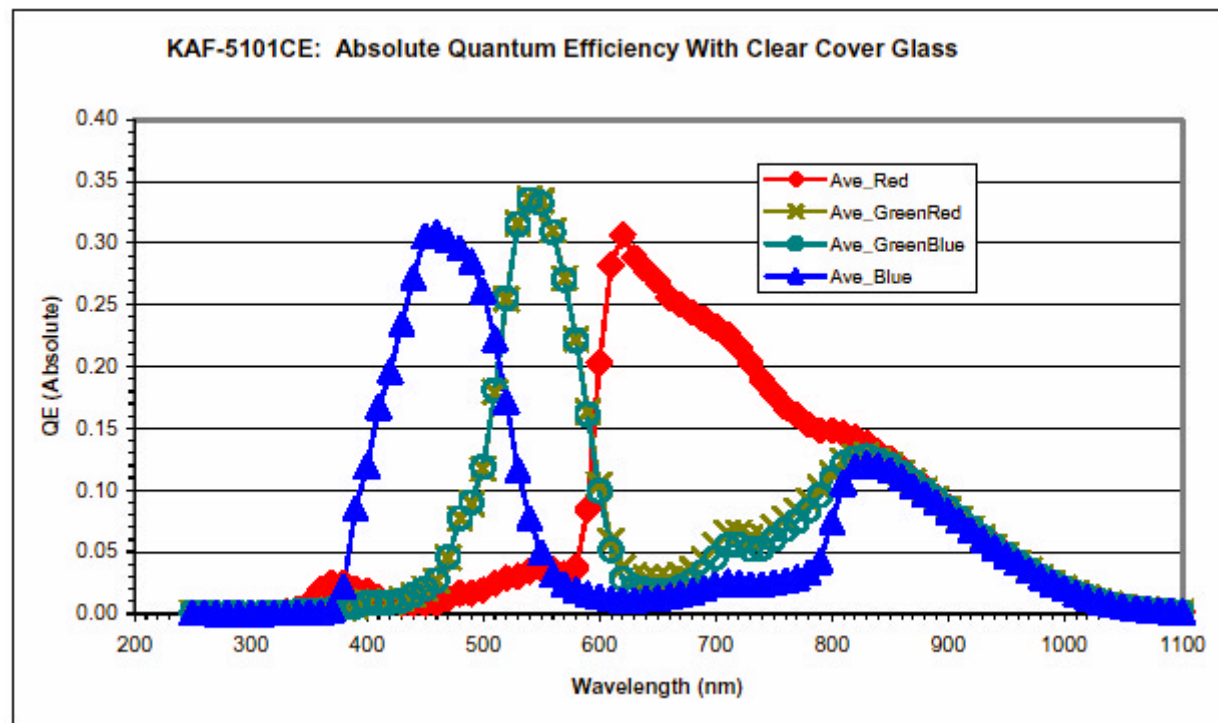

Color filters can be manufactured directly onto the photodetectors.



# Color filter array


Kodak DCS620x

R	G	B
R	G	B
R	G	B
R	G	B

R	G	B	G
R	G	B	G
R	G	B	G
R	G	B	G

Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G

Stripes

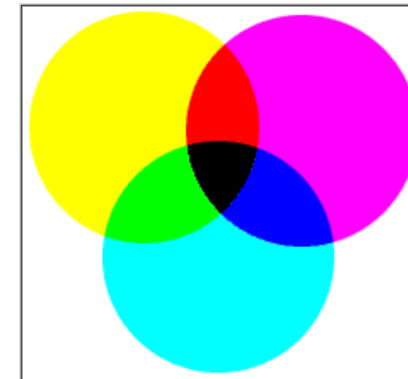


Cy	W	Ye	G
Ye	G	Cy	W
Cy	W	Ye	G
Ye	G	Cy	W

G	Mg	G	Mg
Cy	Ye	Cy	Ye
Mg	G	Mg	G
Cy	Ye	Cy	Ye

R	G	R	G
G	B	G	B
R	G	R	G
G	B	G	B

Mosaics

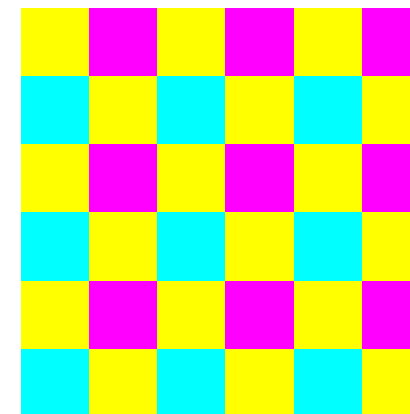


CMY

Color filter arrays (CFAs)/color filter mosaics

# Why CMY CFA might be better

Kodak 13um Pixel CMY & RGB Response

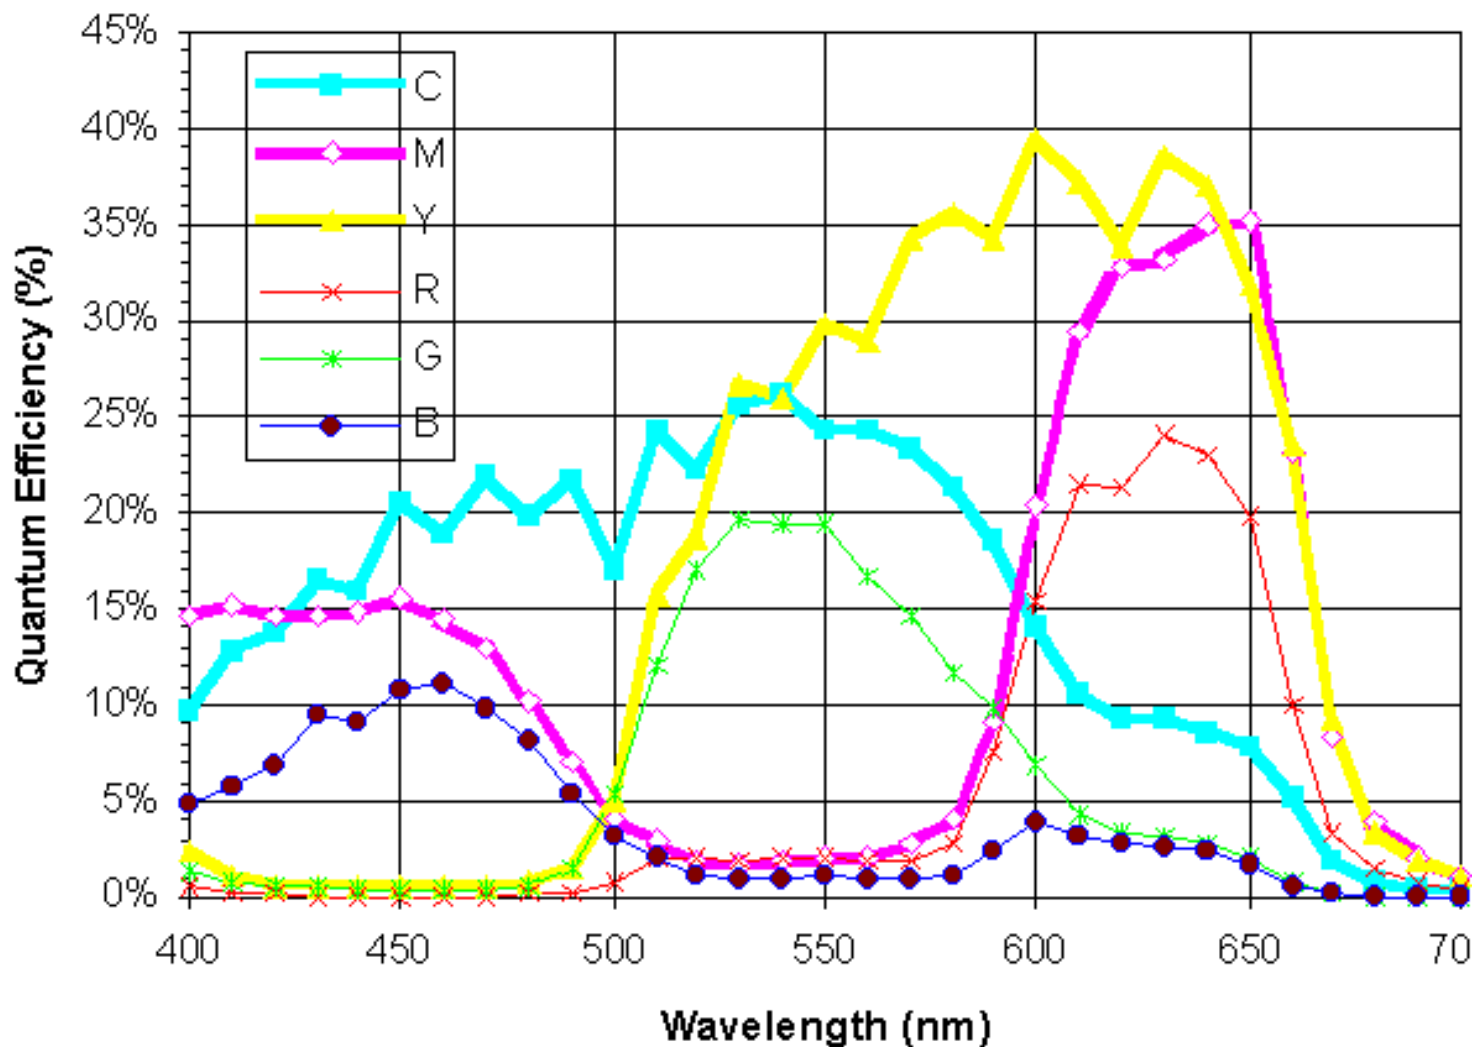

# Color filter array

R	G	B
R	G	B
R	G	B
R	G	B

R	G	B	G
R	G	B	G
R	G	B	G
R	G	B	G

Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G


**Stripes**

Cy	W	Ye	G
Ye	G	Cy	W
Cy	W	Ye	G
Ye	G	Cy	W

G	Mg	G	Mg
Cy	Ye	Cy	Ye
Mg	G	Mg	G
Cy	Ye	Cy	Ye

R	G	R	G
G	B	G	B
R	G	R	G
G	B	G	B

**Mosaics**

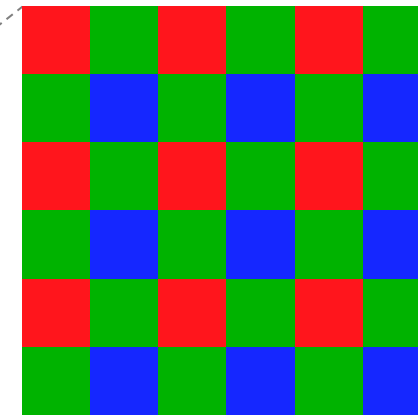


**Bayer pattern**

Color filter arrays (CFAs)/color filter mosaics

# Bayer's pattern

---

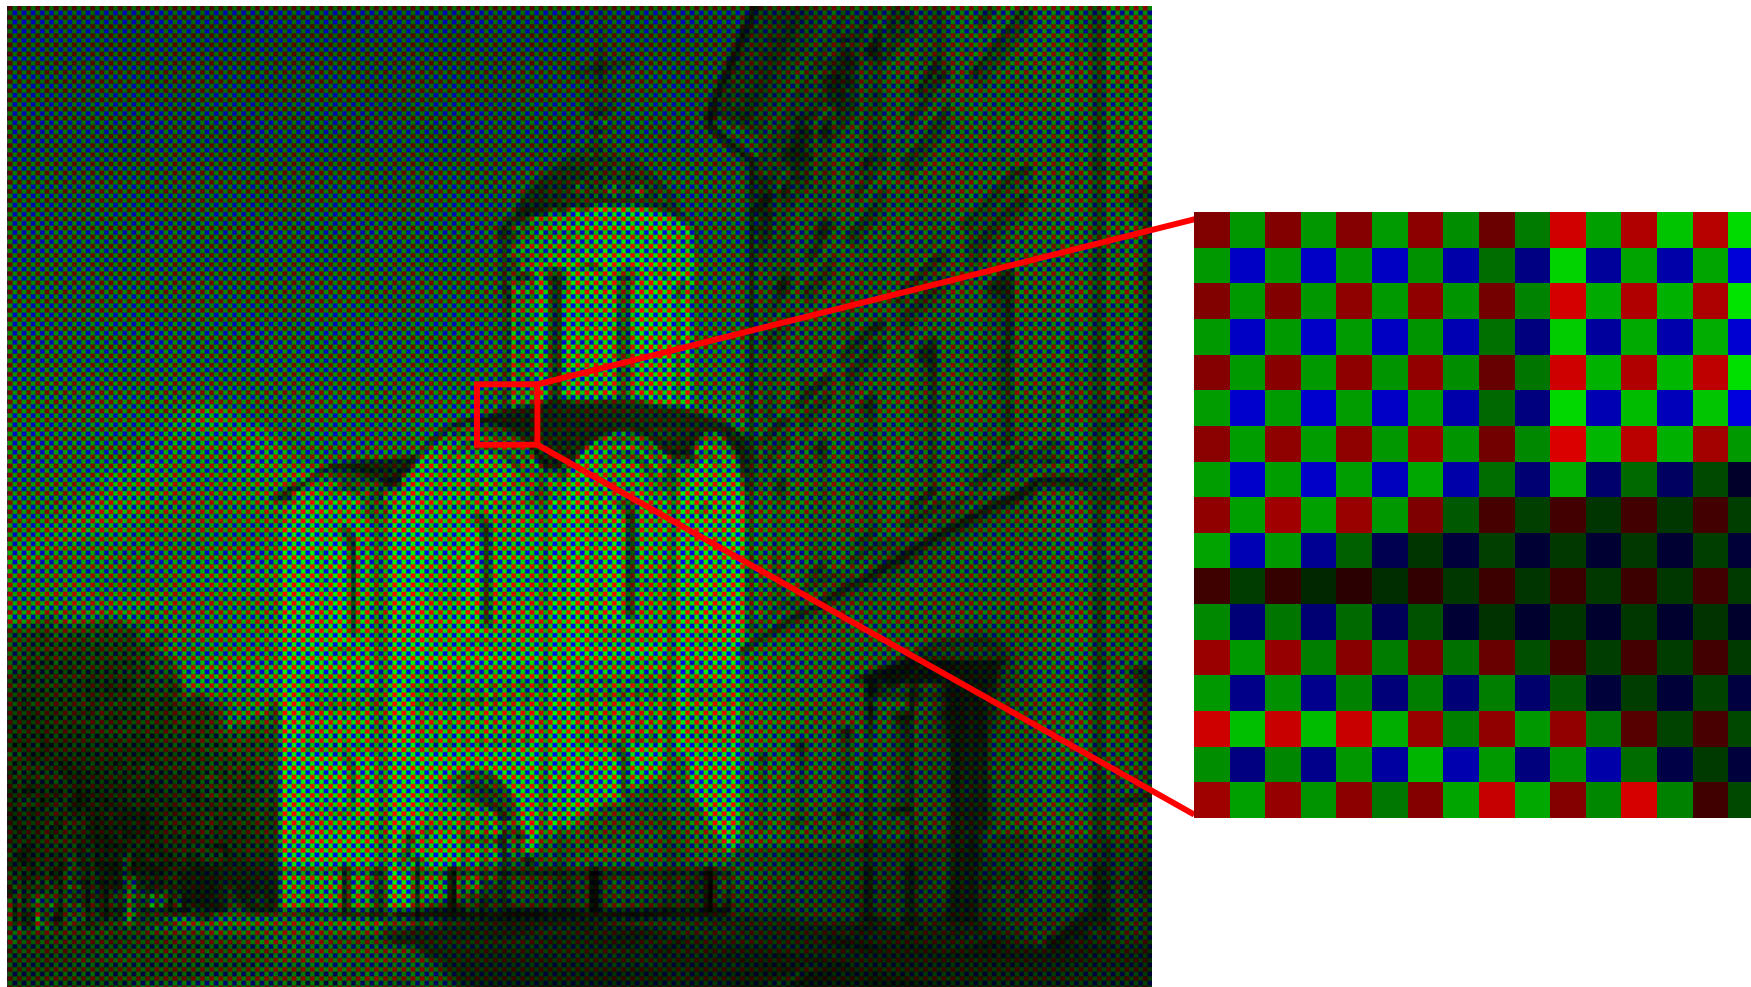


# Demosaicking CFA's

R <sub>11</sub>	G <sub>12</sub>	R <sub>13</sub>	G <sub>14</sub>	R <sub>15</sub>	G <sub>16</sub>	R <sub>17</sub>
G <sub>21</sub>	B <sub>22</sub>	G <sub>23</sub>	B <sub>24</sub>	G <sub>25</sub>	B <sub>26</sub>	G <sub>27</sub>
R <sub>31</sub>	G <sub>32</sub>	R <sub>33</sub>	G <sub>34</sub>	R <sub>35</sub>	G <sub>36</sub>	R <sub>37</sub>
G <sub>41</sub>	B <sub>42</sub>	G <sub>43</sub>	B <sub>44</sub>	G <sub>45</sub>	B <sub>46</sub>	G <sub>47</sub>
R <sub>51</sub>	G <sub>52</sub>	R <sub>53</sub>	G <sub>54</sub>	R <sub>55</sub>	G <sub>56</sub>	R <sub>57</sub>


bilinear interpolation

$$G_{44} = (G_{34} + G_{43} + G_{45} + G_{54}) / 4$$


$$R_{44} = (R_{33} + R_{35} + R_{53} + R_{55}) / 4$$

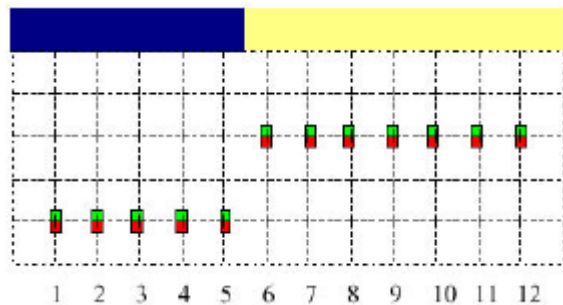

original

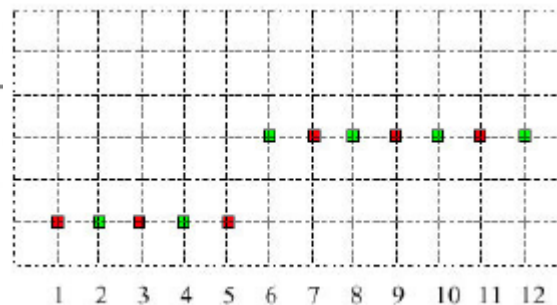

input

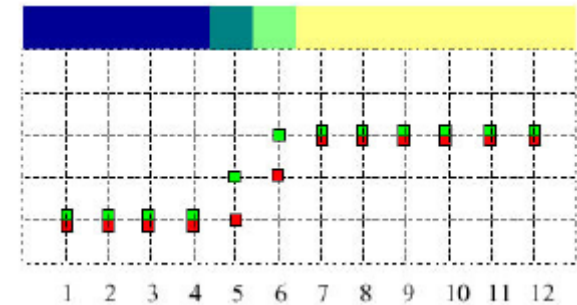

linear interpolation

# Demosaicking CFA's

R <sub>11</sub>	G <sub>12</sub>	R <sub>13</sub>	G <sub>14</sub>	R <sub>15</sub>	G <sub>16</sub>	R <sub>17</sub>
G <sub>21</sub>	B <sub>22</sub>	G <sub>23</sub>	B <sub>24</sub>	G <sub>25</sub>	B <sub>26</sub>	G <sub>27</sub>
R <sub>31</sub>	G <sub>32</sub>	R <sub>33</sub>	G <sub>34</sub>	R <sub>35</sub>	G <sub>36</sub>	R <sub>37</sub>
G <sub>41</sub>	B <sub>42</sub>	G <sub>43</sub>	B <sub>44</sub>	G <sub>45</sub>	B <sub>46</sub>	G <sub>47</sub>
R <sub>51</sub>	G <sub>52</sub>	R <sub>53</sub>	G <sub>54</sub>	R <sub>55</sub>	G <sub>56</sub>	R <sub>57</sub>
G <sub>61</sub>	B <sub>62</sub>	G <sub>63</sub>	B <sub>64</sub>	G <sub>65</sub>	B <sub>66</sub>	G <sub>67</sub>
R <sub>71</sub>	G <sub>72</sub>	R <sub>73</sub>	G <sub>74</sub>	R <sub>75</sub>	G <sub>76</sub>	R <sub>77</sub>

Constant hue-based interpolation (Cok)

Hue:  $(R/G, B/G)$

Interpolate G first

$$R_{44} = G_{44} \frac{\frac{R_{33}}{G_{33}} + \frac{R_{35}}{G_{35}} + \frac{R_{53}}{G_{53}} + \frac{R_{55}}{G_{55}}}{4}$$

$$B_{33} = G_{33} \frac{\frac{B_{22}}{G_{22}} + \frac{B_{24}}{G_{24}} + \frac{B_{42}}{G_{42}} + \frac{B_{44}}{G_{44}}}{4}$$

# Demosaicking CFA's

---


R <sub>11</sub>	G <sub>12</sub>	R <sub>13</sub>	G <sub>14</sub>	R <sub>15</sub>	G <sub>16</sub>	R <sub>17</sub>
G <sub>21</sub>	B <sub>22</sub>	G <sub>23</sub>	B <sub>24</sub>	G <sub>25</sub>	B <sub>26</sub>	G <sub>27</sub>
R <sub>31</sub>	G <sub>32</sub>	R <sub>33</sub>	G <sub>34</sub>	R <sub>35</sub>	G <sub>36</sub>	R <sub>37</sub>
G <sub>41</sub>	B <sub>42</sub>	G <sub>43</sub>	B <sub>44</sub>	G <sub>45</sub>	B <sub>46</sub>	G <sub>47</sub>
R <sub>51</sub>	G <sub>52</sub>	R <sub>53</sub>	G <sub>54</sub>	R <sub>55</sub>	G <sub>56</sub>	R <sub>57</sub>
G <sub>61</sub>	B <sub>62</sub>	G <sub>63</sub>	B <sub>64</sub>	G <sub>65</sub>	B <sub>66</sub>	G <sub>67</sub>
R <sub>71</sub>	G <sub>72</sub>	R <sub>73</sub>	G <sub>74</sub>	R <sub>75</sub>	G <sub>76</sub>	R <sub>77</sub>

## Median-based interpolation (Freeman)


1. Linear interpolation
2. Median filter on color differences

# Demosaicking CFA's


## Median-based interpolation (Freeman)

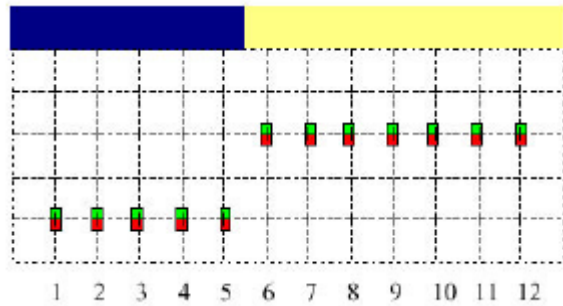


original

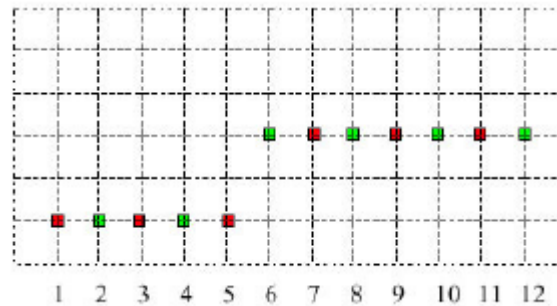


input

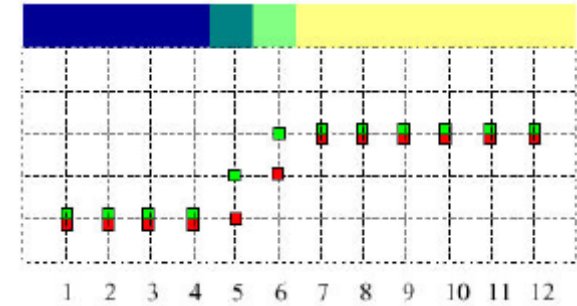


linear interpolation

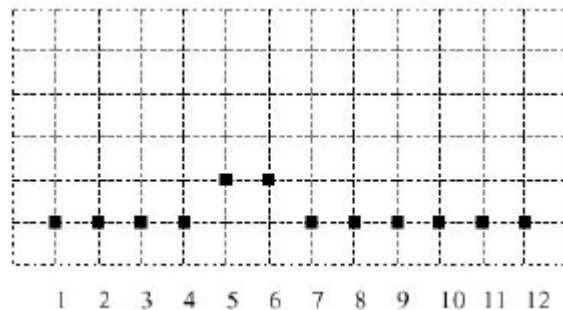

color difference  
(e.g. G-R)

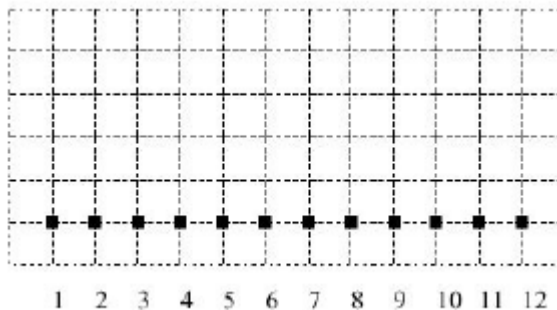

median filter  
(kernel size 5)

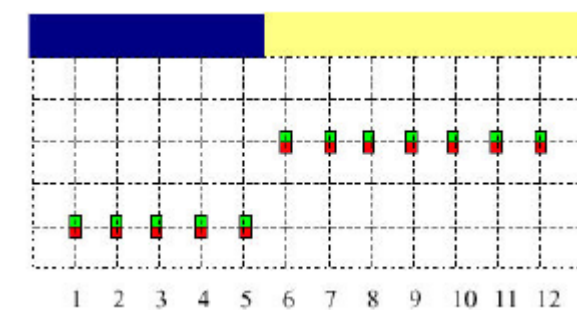

Reconstruction  
( $G=R+\text{filtered difference}$ )



# Demosaicking CFA's

R <sub>11</sub>	G <sub>12</sub>	R <sub>13</sub>	G <sub>14</sub>	R <sub>15</sub>	G <sub>16</sub>	R <sub>17</sub>
G <sub>21</sub>	B <sub>22</sub>	G <sub>23</sub>	B <sub>24</sub>	G <sub>25</sub>	B <sub>26</sub>	G <sub>27</sub>
R <sub>31</sub>	G <sub>32</sub>	R <sub>33</sub>	G <sub>34</sub>	R <sub>35</sub>	G <sub>36</sub>	R <sub>37</sub>
G <sub>41</sub>	B <sub>42</sub>	G <sub>43</sub>	B <sub>44</sub>	G <sub>45</sub>	B <sub>46</sub>	G <sub>47</sub>
R <sub>51</sub>	G <sub>52</sub>	R <sub>53</sub>	G <sub>54</sub>	R <sub>55</sub>	G <sub>56</sub>	R <sub>57</sub>
G <sub>61</sub>	B <sub>62</sub>	G <sub>63</sub>	B <sub>64</sub>	G <sub>65</sub>	B <sub>66</sub>	G <sub>67</sub>
R <sub>71</sub>	G <sub>72</sub>	R <sub>73</sub>	G <sub>74</sub>	R <sub>75</sub>	G <sub>76</sub>	R <sub>77</sub>

Gradient-based interpolation  
(LaRoche-Prescott)

1. Interpolation on G

$$\alpha = \text{abs}[(B_{42} + B_{46})/2 - B_{44}]$$

$$\beta = \text{abs}[(B_{24} + B_{64})/2 - B_{44}]$$

$$G_{44} = \begin{cases} \frac{G_{43} + G_{45}}{2} & \text{if } \alpha < \beta \\ \frac{G_{34} + G_{54}}{2} & \text{if } \alpha > \beta \\ \frac{G_{43} + G_{45} + G_{34} + G_{54}}{4} & \text{if } \alpha = \beta \end{cases}$$

# Demosaicking CFA's

R <sub>11</sub>	G <sub>12</sub>	R <sub>13</sub>	G <sub>14</sub>	R <sub>15</sub>	G <sub>16</sub>	R <sub>17</sub>
G <sub>21</sub>	B <sub>22</sub>	G <sub>23</sub>	B <sub>24</sub>	G <sub>25</sub>	B <sub>26</sub>	G <sub>27</sub>
R <sub>31</sub>	G <sub>32</sub>	R <sub>33</sub>	G <sub>34</sub>	R <sub>35</sub>	G <sub>36</sub>	R <sub>37</sub>
G <sub>41</sub>	B <sub>42</sub>	G <sub>43</sub>	B <sub>44</sub>	G <sub>45</sub>	B <sub>46</sub>	G <sub>47</sub>
R <sub>51</sub>	G <sub>52</sub>	R <sub>53</sub>	G <sub>54</sub>	R <sub>55</sub>	G <sub>56</sub>	R <sub>57</sub>
G <sub>61</sub>	B <sub>62</sub>	G <sub>63</sub>	B <sub>64</sub>	G <sub>65</sub>	B <sub>66</sub>	G <sub>67</sub>
R <sub>71</sub>	G <sub>72</sub>	R <sub>73</sub>	G <sub>74</sub>	R <sub>75</sub>	G <sub>76</sub>	R <sub>77</sub>

Gradient-based interpolation  
(LaRoche-Prescott)

2. Interpolation of color differences


$$R_{34} = \frac{(R_{33} - G_{33}) + (R_{35} - G_{35})}{2} + G_{34},$$

$$R_{43} = \frac{(R_{33} - G_{33}) + (R_{53} - G_{53})}{2} + G_{43},$$

$$R_{44} = \frac{(R_{33} - G_{33}) + (R_{35} - G_{35}) + (R_{53} - G_{53}) + (R_{55} - G_{55})}{4}$$

$$+ G_{44}.$$

# Demosaicking CFA's

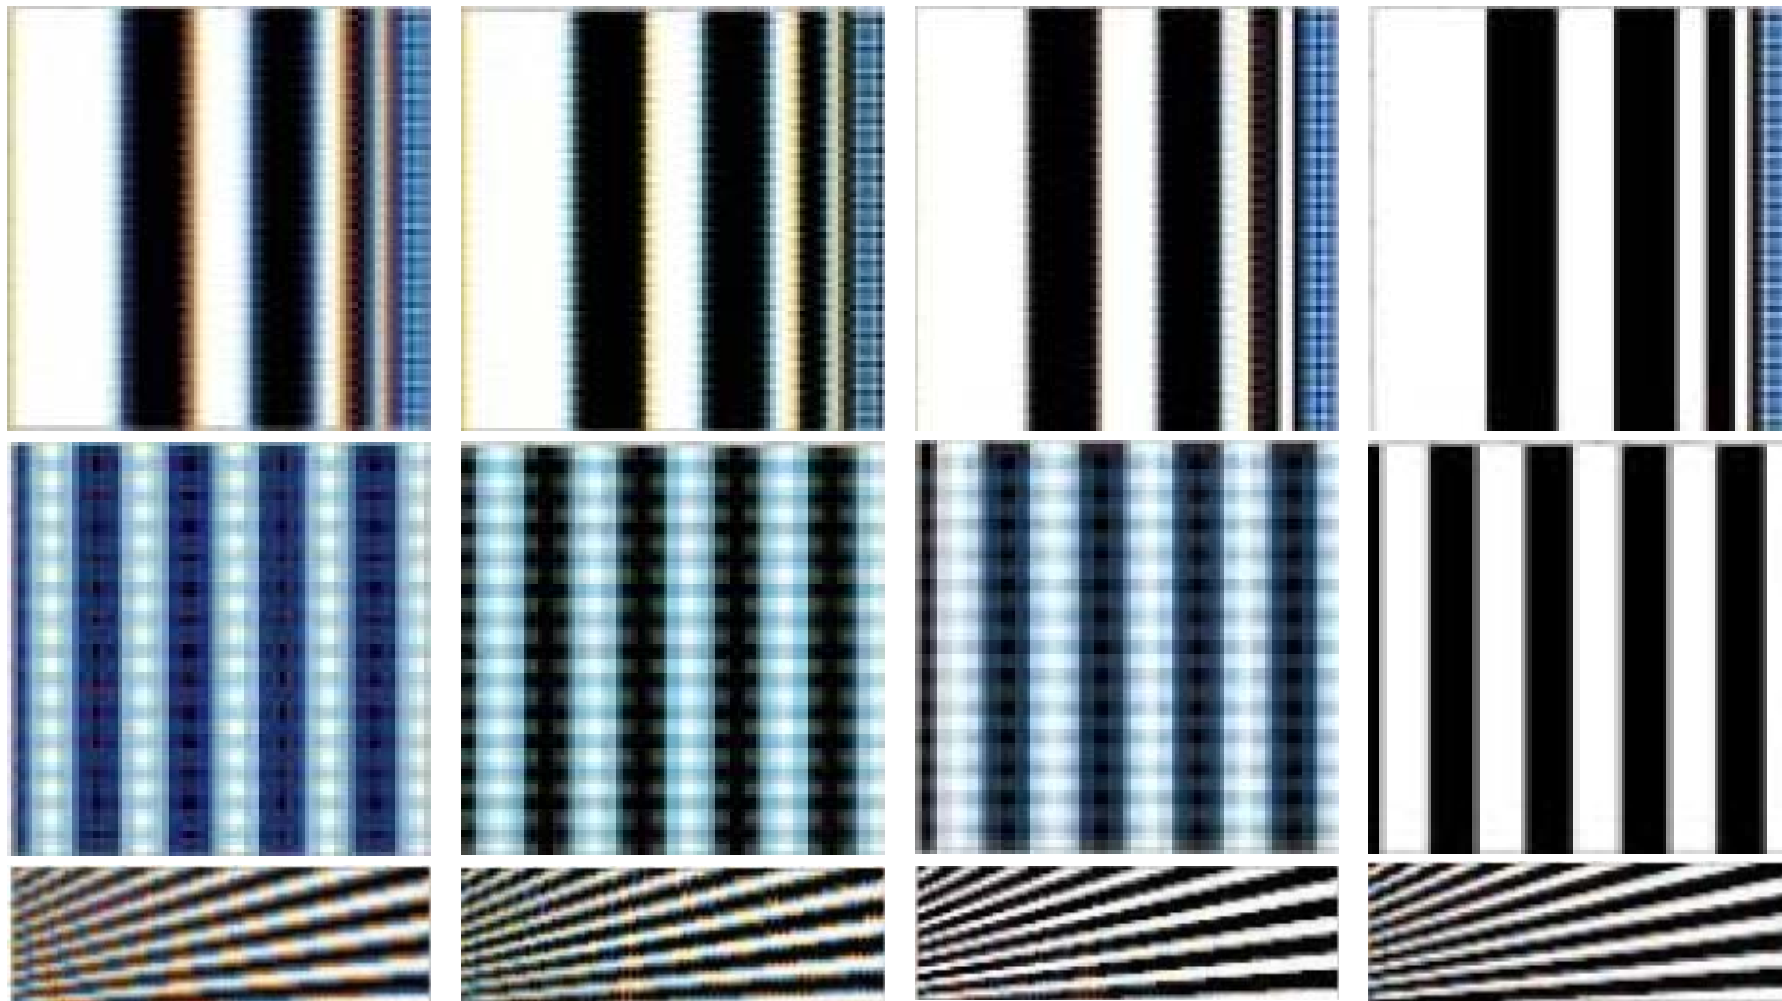


bilinear

Cok

Freeman

LaRoche

# Demosaicking CFA's

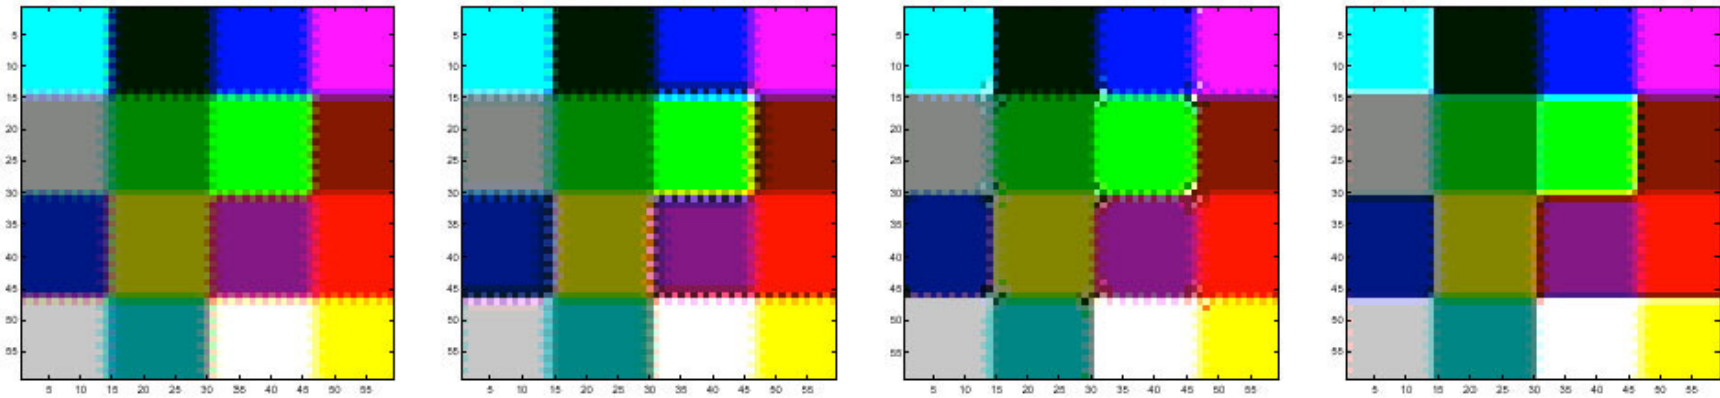


*Bilinear*

*Cok*

*Freeman*

*LaRoche*

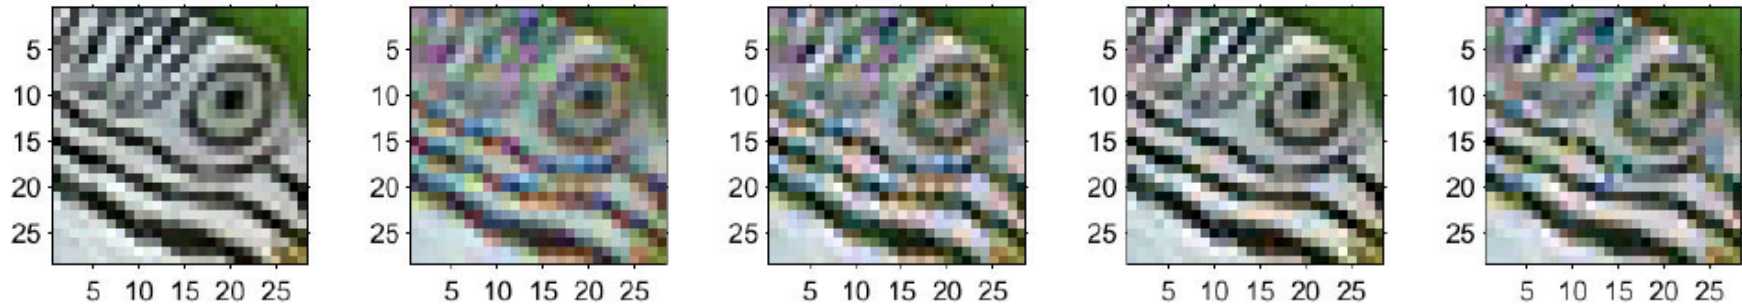

*Input*

*Bilinear*

*Cok*




*Freeman*

*LaRoche*



Generally, Freeman's is the best, especially for natural images.

# Foveon X3 sensor


- light penetrates to different depths for different wavelengths
- multilayer CMOS sensor gets 3 different spectral sensitivities

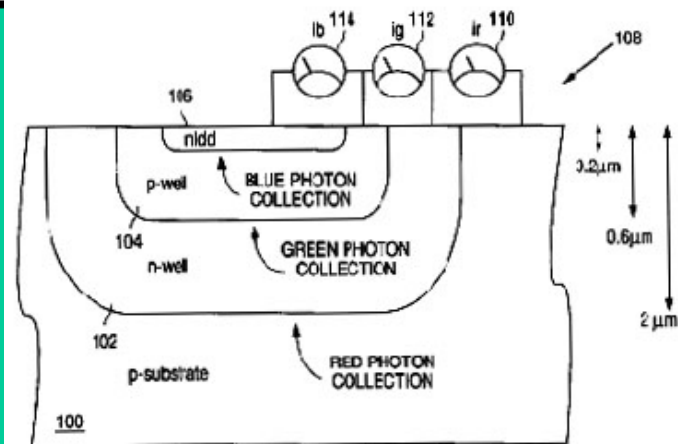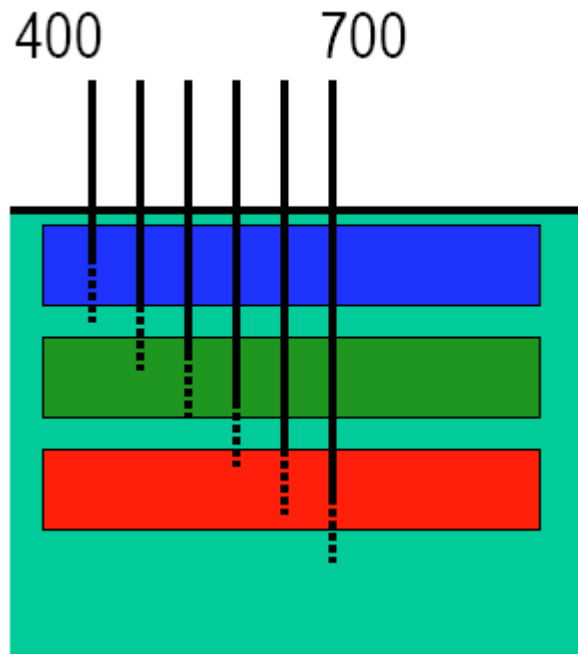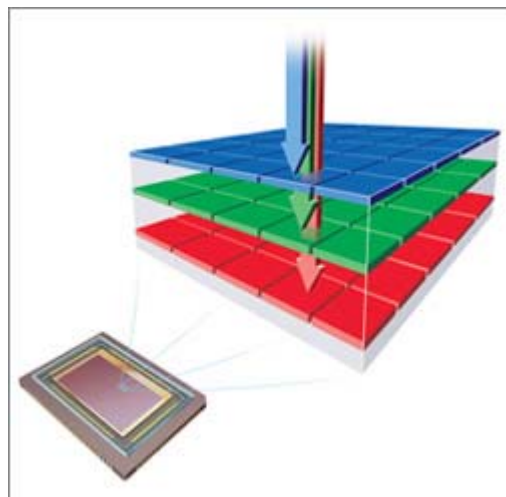


# Color filter array

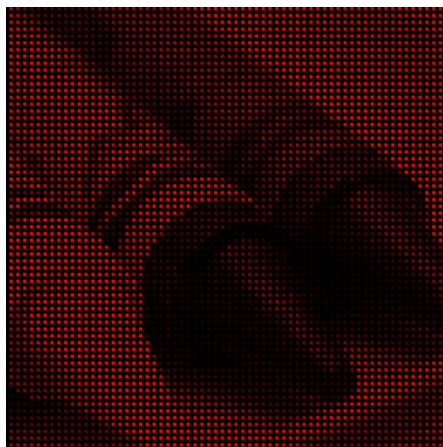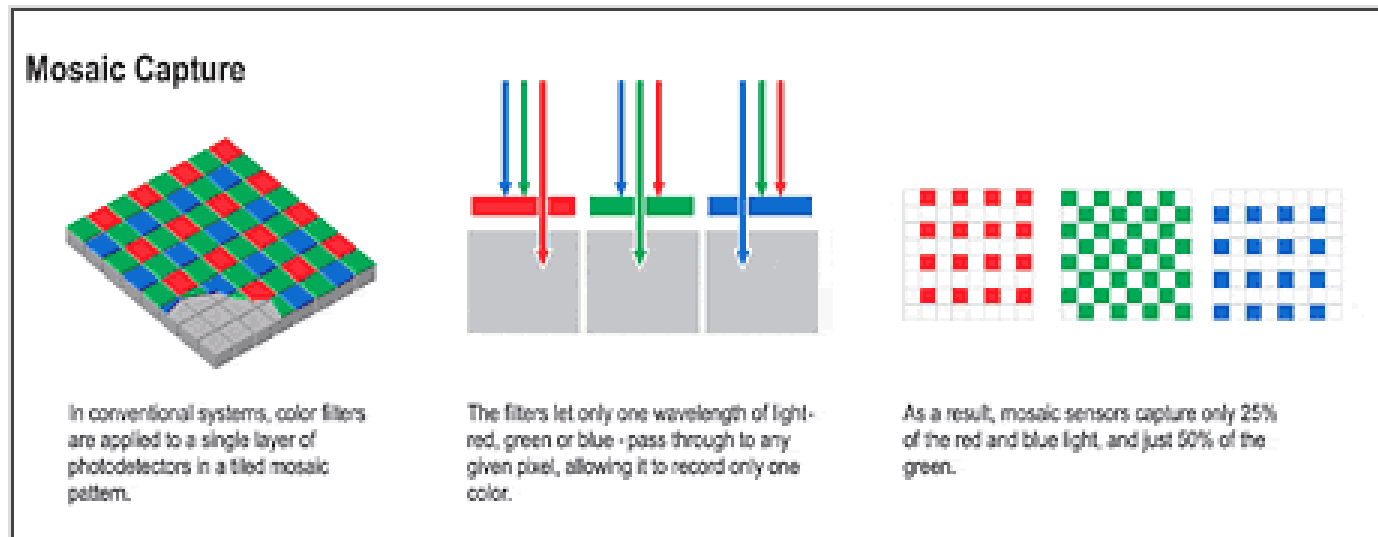

red

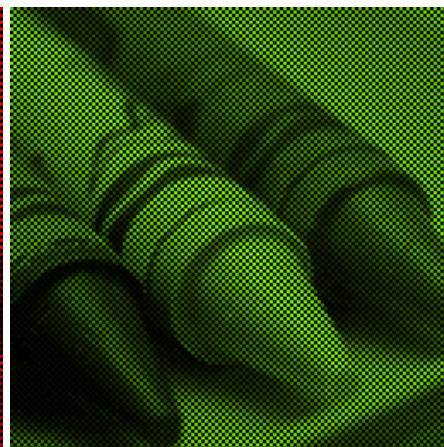

green


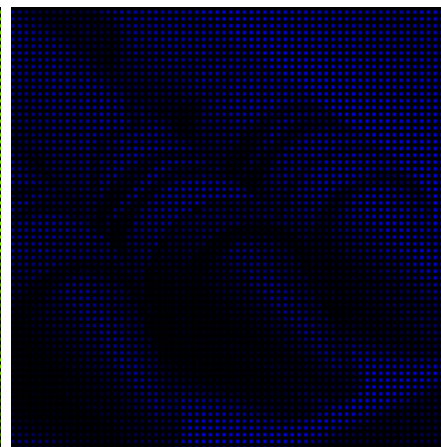


blue



output


# X3 technology

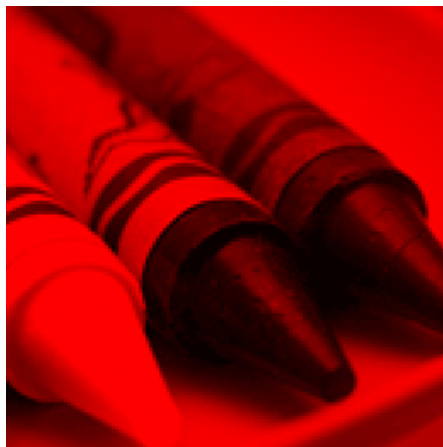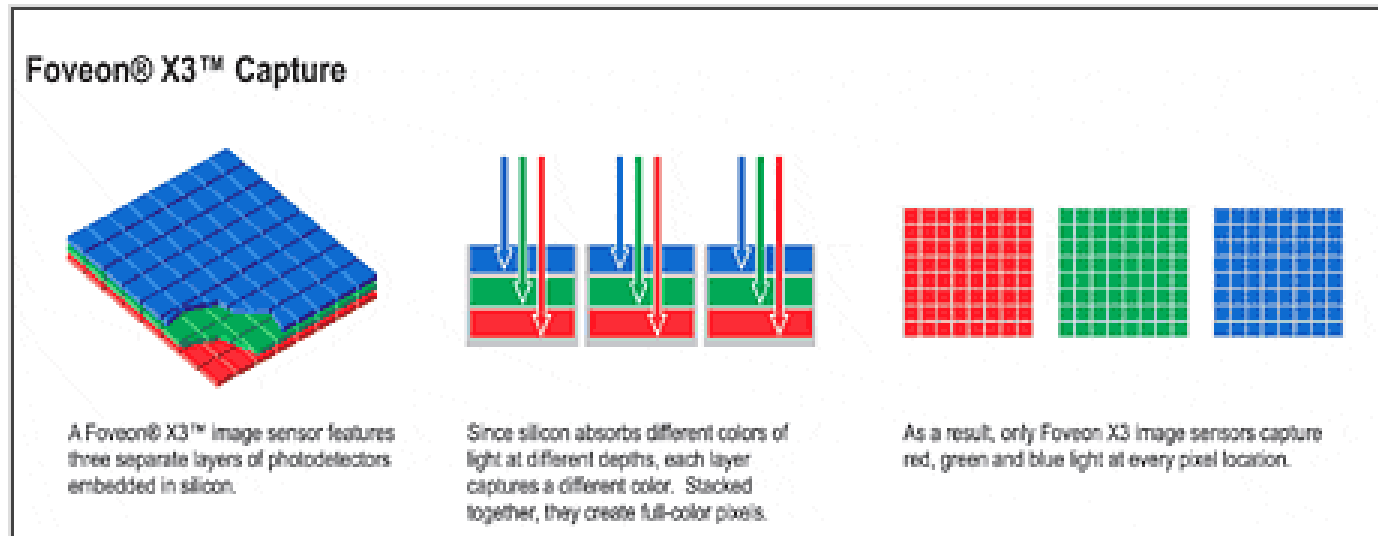

red



green

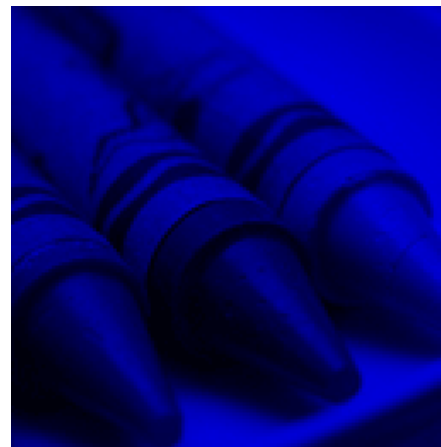


blue




output

# Foveon X3 sensor

---

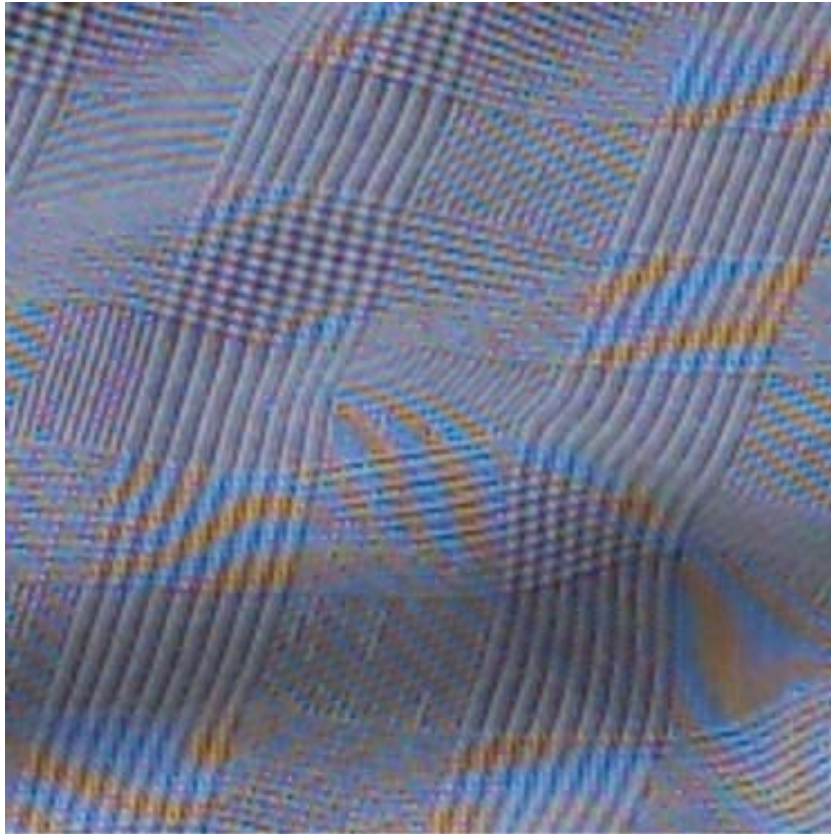

Bayer CFA

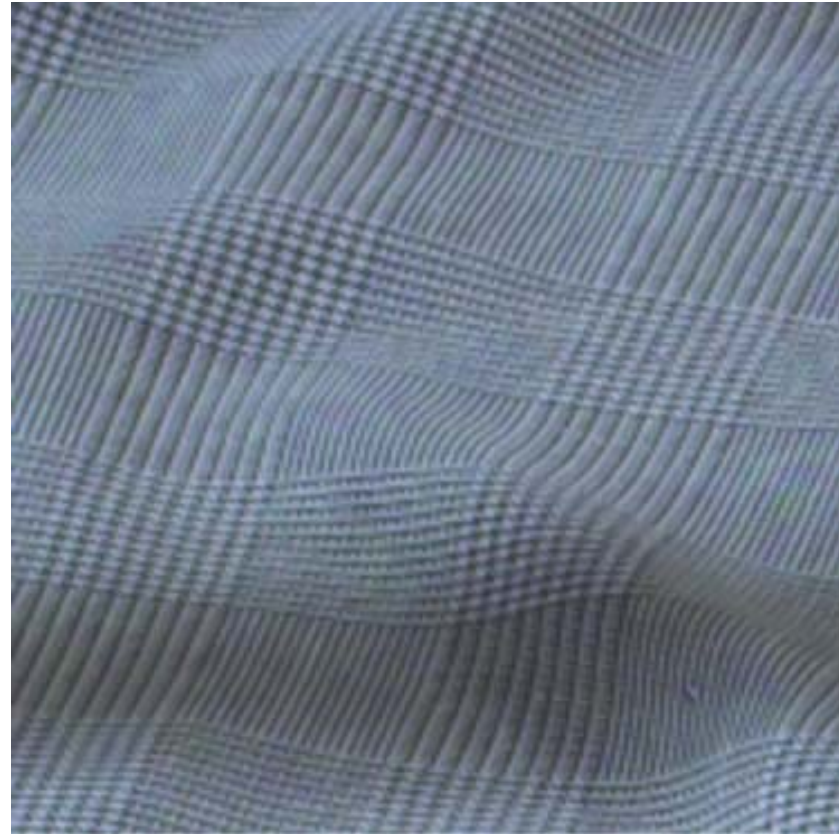

X3 sensor



# Cameras with X3

---



**Sigma SD10, SD9**



**Polaroid X530**

# Sigma SD9 vs Canon D30




# Color processing


---

- After color values are recorded, more color processing usually happens:
  - White balance
  - Non-linearity to approximate film response or match TV monitor gamma

# White Balance

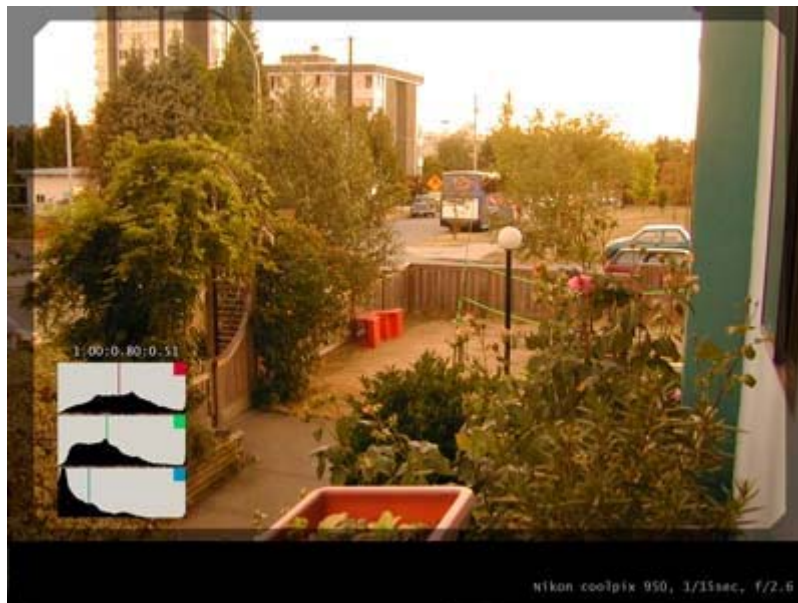


warmer +3

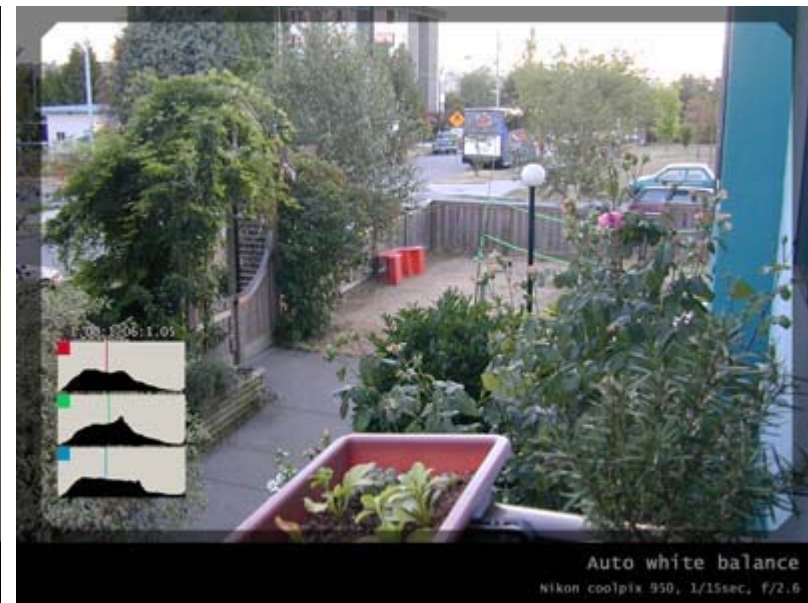

automatic white balance

# White Balance

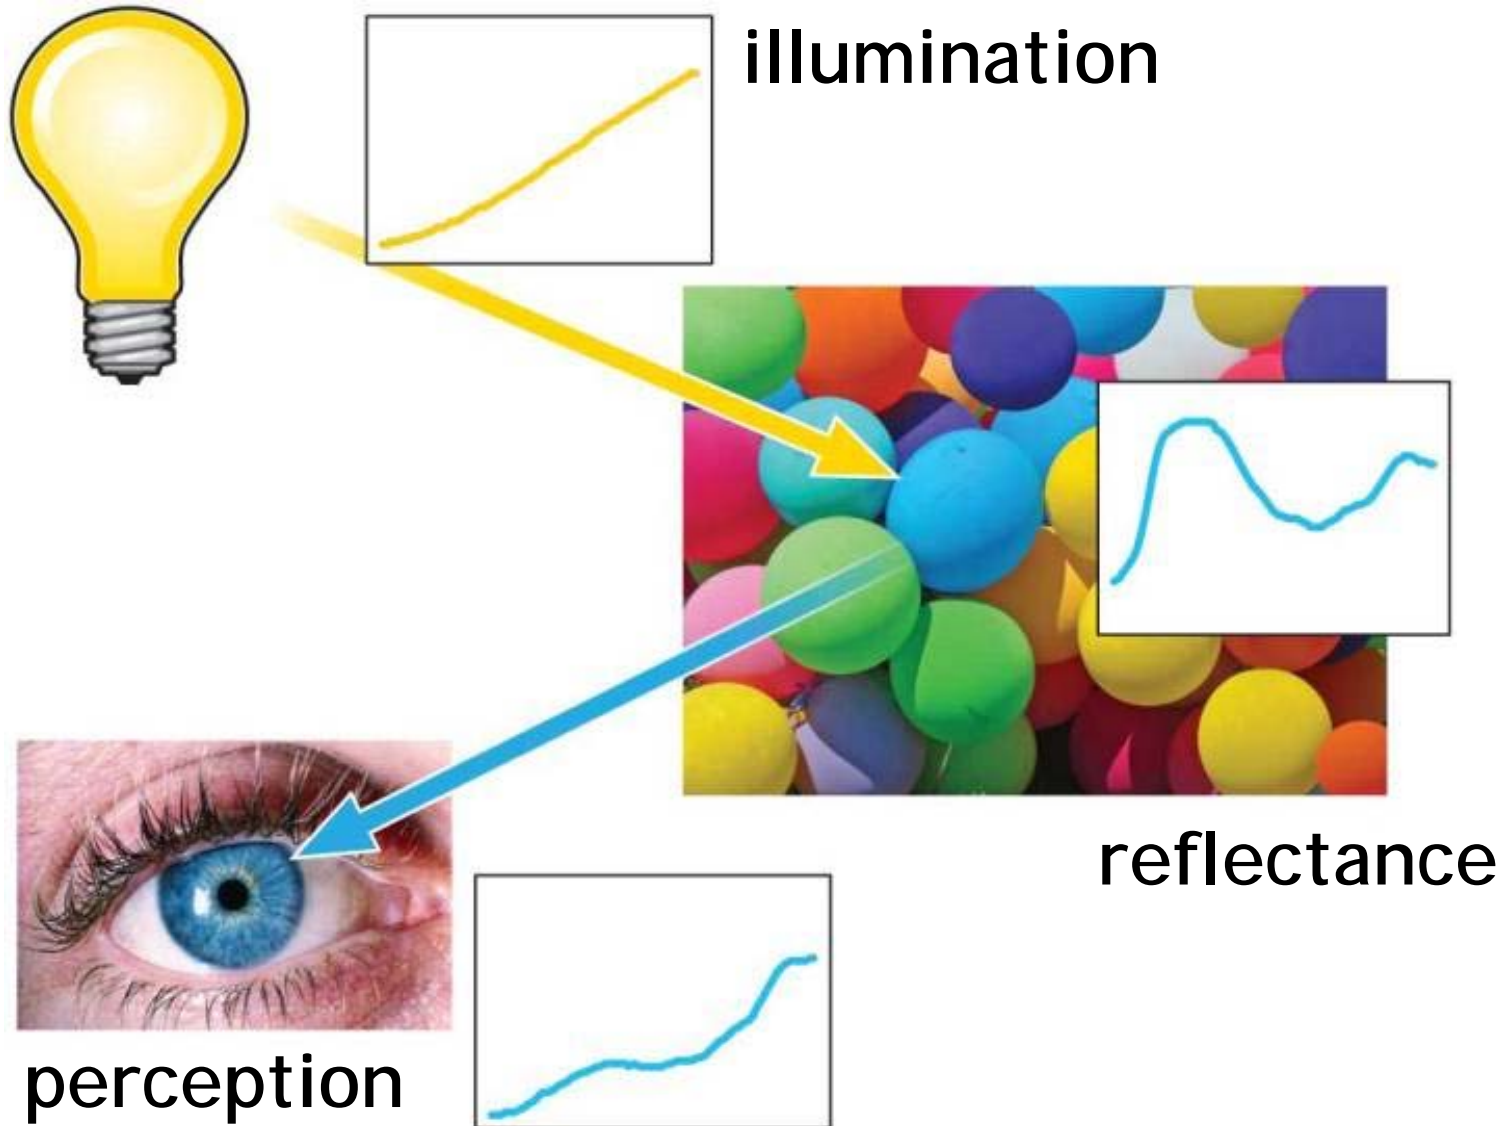

# Color constancy



---



What color is the dress?





# Color constancy

---



# Autofocus

- Active
  - Sonar
  - Infrared
- Passive

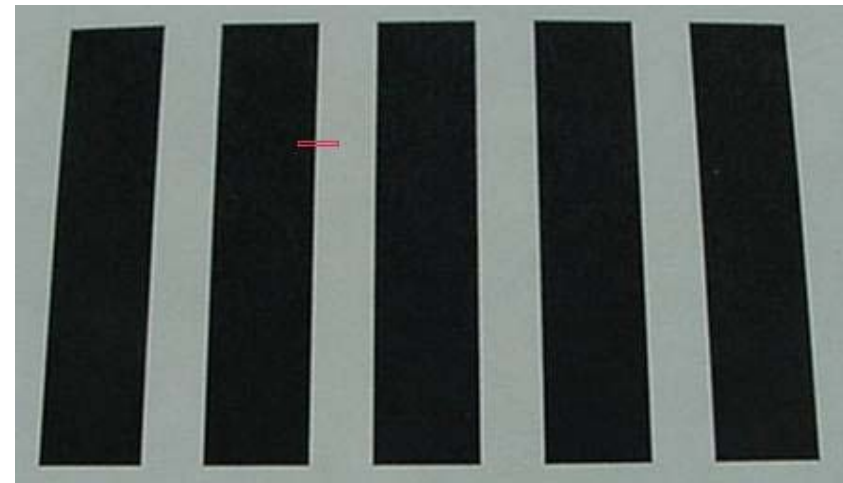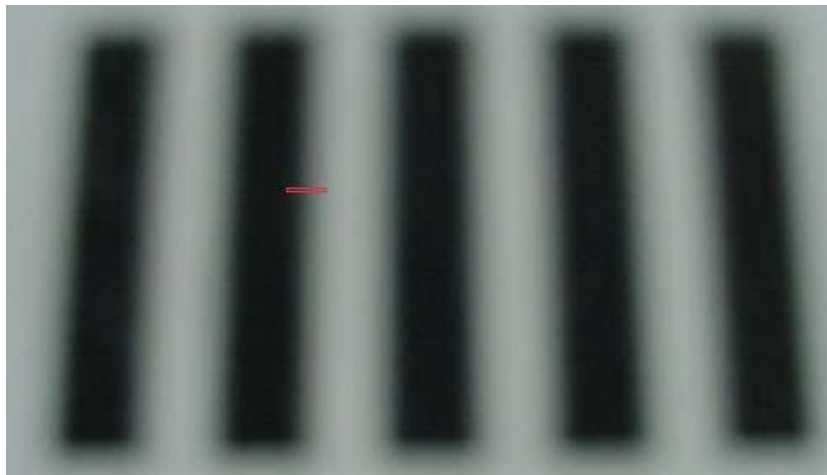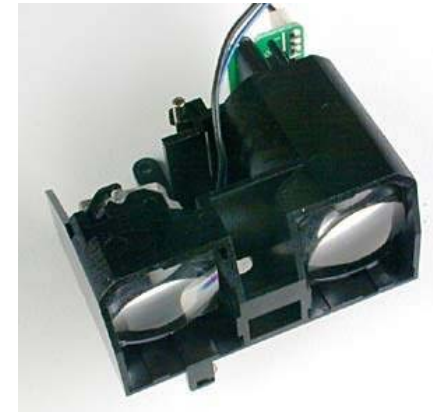




# Digital camera review website

---

- [A cool video of digital camera illustration](#)
- <http://www.dpreview.com/>

# Camcorder

---

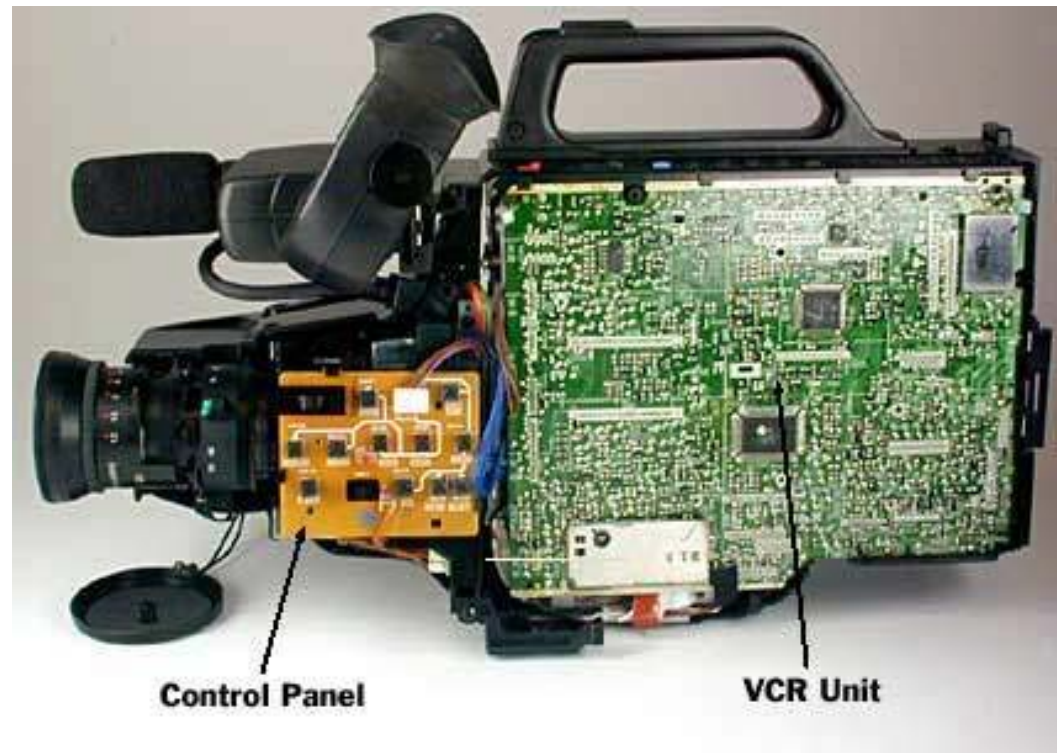

# Interlacing

---



without interlacing




with interlacing

# Deinterlacing

---



blend

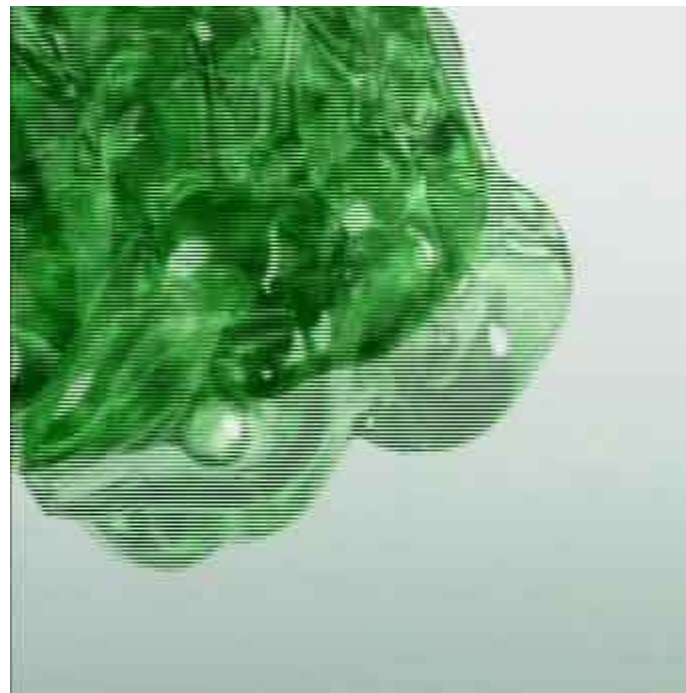

weave

# Deinterlacing

---



Discard  
(even field only or  
odd field only)



Progressive scan

# Hard cases

---



# Computational cameras

**THERMAL IR**

**XBOX KINECT**

**PMD**

**LYTRO**

**LEAP MOTION**

**SOFT KINETIC**

**GOOGLE GLASS**

**MESA**

MAS.541  
Thu 9a-12p  
Room 9-057  
Computational Camera:  
Google Glass, Microsoft  
Kinect and Apps



# References

---

- <http://www.howstuffworks.com/digital-camera.htm>
- <http://electronics.howstuffworks.com/autofocus.htm>
- Ramanath, Snyder, Bilbro, and Sander. [Demosaicking Methods for Bayer Color Arrays](#), Journal of Electronic Imaging, 11(3), pp306-315.
- Rajeev Ramanath, Wesley E. Snyder, Youngjun Yoo, Mark S. Drew, [Color Image Processing Pipeline in Digital Still Cameras](#), IEEE Signal Processing Magazine Special Issue on Color Image Processing, vol. 22, no. 1, pp. 34-43, 2005.
- <http://www.worldatwar.org/photos/whitebalance/index.mhtml>
- <http://www.100fps.com/>