

Applied Deep Learning




Word Representations



September 22nd, 2022

<http://adl.miulab.tw>



**National
Taiwan
University**
國立臺灣大學

Meaning Representations

- Definition of “Meaning”
 - the idea that is represented by a word, phrase, etc.
 - the idea that a person wants to express by using words, signs, etc.
 - the idea that is expressed in a work of writing, art, etc.

Meaning Representations in Computers

Knowledge-Based Representation




Corpus-Based Representation



Meaning Representations in Computers

Knowledge-Based Representation

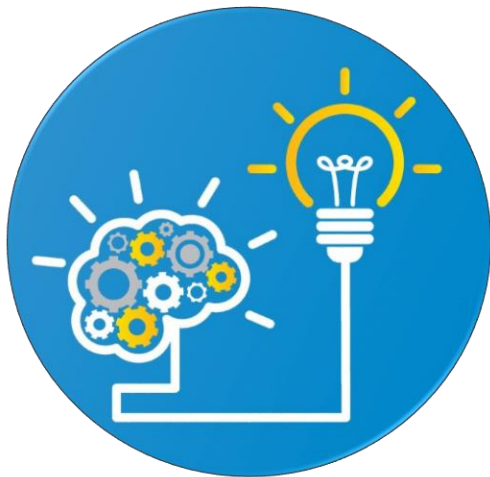

Corpus-Based Representation




Knowledge-Based Representation

Hypernyms (is-a) relationships of WordNet

```
from nltk.corpus import wordnet as wn
panda = wn.synset('panda.n.01')
hyper = lambda s: s.hypernyms()
list(panda.closure(hyper))
```

```
[Synset('procyonid.n.01'),
Synset('carnivore.n.01'),
Synset('placental.n.01'),
Synset('mammal.n.01'),
Synset('vertebrate.n.01'),
Synset('chordate.n.01'),
Synset('animal.n.01'),
Synset('organism.n.01'),
Synset('living_thing.n.01'),
Synset('whole.n.02'),
Synset('object.n.01'),
Synset('physical_entity.n.01'),
Synset('entity.n.01')]
```

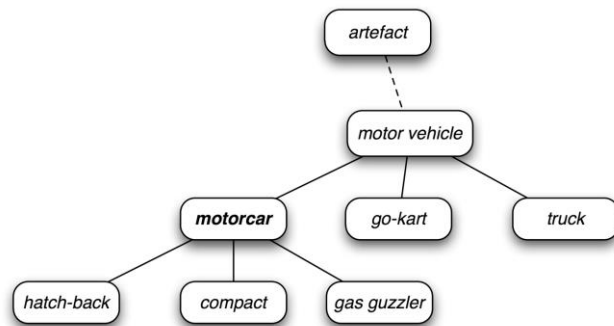


Issues:

- newly-invented words
- subjective
- annotation effort
- difficult to compute word similarity

Meaning Representations in Computers

Knowledge-Based Representation

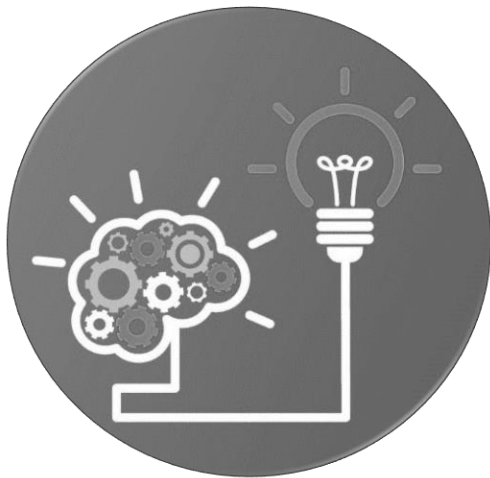

Corpus-Based Representation



7 Corpus-Based Representation

- Atomic symbols: **one-hot** representation

car [0 0 0 0 0 0 1 0 0 ... 0]



car

Issues: difficult to compute the similarity (i.e. comparing “car” and “motorcycle”)

$[0\ 0\ 0\ 0\ 0\ 0\ 1\ 0\ 0\ \dots\ 0]$ AND $[0\ 0\ 1\ 0\ 0\ 0\ 0\ 0\ 0\ \dots\ 0] = 0$
car motorcycle

Idea: words with similar meanings often have similar neighbors

Corpus-Based Representation

- Neighbor-based representation
 - Co-occurrence matrix constructed via neighbors
 - Neighbor definition: full document v.s. windows

full document

word-document co-occurrence matrix gives general topics
→ “Latent Semantic Analysis”

windows

context window for each word
→ capture syntactic (e.g. POS) and semantic information

Window-Based Co-occurrence Matrix

Example

- Window length=1
- Left or right context
- Corpus:

I love AI.
I love deep learning.
I enjoy learning.

similarity > 0

Counts	I	love	enjoy	AI	deep	learning
I	0	2	1	0	0	0
love	2	0	0	1	1	0
enjoy	1	0	0	0	0	1
AI	0	1	0	0	0	0
deep	0	1	0	0	0	1
learning	0	0	1	0	1	0

Issues:

- matrix size increases with vocabulary
- high dimensional
- sparsity → poor robustness

Idea: low dimensional word vector


Low-Dimensional Dense Word Vector

- Method 1: dimension reduction on the matrix
- Singular Value Decomposition (SVD) of co-occurrence matrix X


$$\begin{array}{c}
 \begin{array}{ccc}
 & m & \\
 n & \boxed{} & \\
 & X & \\
 \end{array}
 =
 \begin{array}{ccc}
 & r & \\
 n & \begin{array}{|c|c|c|c|} \hline | & | & | & | \\ \hline U_1 & U_2 & U_3 & \cdots \\ \hline | & | & | & | \\ \hline \end{array} &
 \begin{array}{|c|c|c|c|} \hline S_1 & & & 0 \\ & S_2 & & \\ & & S_3 & \cdots \\ 0 & & & \ddots \\ & & & & S_r \\ \hline \end{array} &
 \begin{array}{|c|c|c|c|} \hline \text{---} & V_1 & \text{---} \\ \text{---} & V_2 & \text{---} \\ \text{---} & V_3 & \text{---} \\ & \vdots & \\ \hline \end{array} & \\
 & U & S & V^T
 \end{array}
 \\
 \text{approximate} \quad \uparrow \\
 \begin{array}{ccc}
 & m & \\
 n & \boxed{\phantom{\hat{X}}} & \\
 & \hat{X} & \\
 \end{array}
 =
 \begin{array}{ccc}
 & k & \\
 n & \begin{array}{|c|c|c|c|} \hline | & | & | & | \\ \hline U_1 & U_2 & U_3 & \cdots \\ \hline | & | & | & | \\ \hline \end{array} &
 \begin{array}{|c|c|c|c|} \hline S_1 & & & 0 \\ & S_2 & & \\ & & S_3 & \cdots \\ 0 & & & \ddots \\ & & & & S_k \\ \hline \end{array} &
 \begin{array}{|c|c|c|c|} \hline \text{---} & V_1 & \text{---} \\ \text{---} & V_2 & \text{---} \\ \text{---} & V_3 & \text{---} \\ & \vdots & \\ \hline \end{array} & \\
 & \hat{U} & \hat{S} & \hat{V}^T
 \end{array}
 \end{array}$$

Low-Dimensional Dense Word Vector

- Method 1: dimension reduction on the matrix
- Singular Value Decomposition (SVD) of co-occurrence matrix X

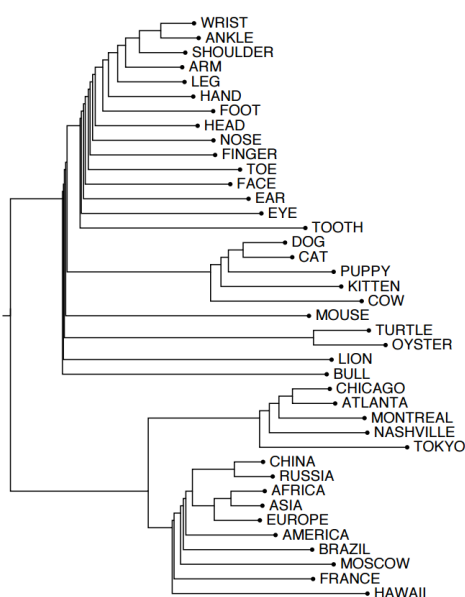

semantic relations

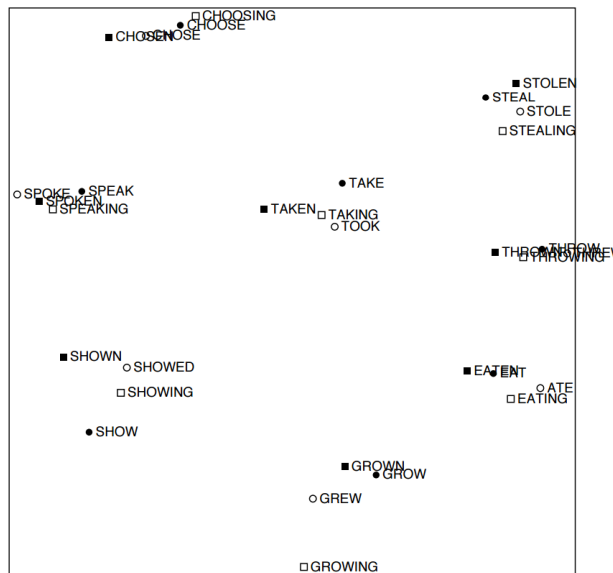

syntactic relations

Issues:

- computationally expensive: $O(mn^2)$ when $n < m$ for $n \times m$ matrix
- difficult to add new words

Idea: directly learn low-dimensional word vectors

Low-Dimensional Dense Word Vector

- Method 2: directly learn low-dimensional word vectors
 - Learning representations by back-propagation. (Rumelhart et al., 1986)
 - A neural probabilistic language model (Bengio et al., 2003)
 - NLP (almost) from Scratch (Collobert & Weston, 2008)
 - Recent and most popular models: **word2vec** (Mikolov et al. 2013) and **Glove** (Pennington et al., 2014)
 - As known as “Word Embeddings”

Summary

- ⦿ Knowledge-based representation
- ⦿ Corpus-based representation
 - ✓ Atomic symbol
 - ✓ Neighbors
 - High-dimensional sparse word vector
 - Low-dimensional dense word vector
 - Method 1 – dimension reduction
 - Method 2 – direct learning